# Large Mammal-Vehicle Collision Hot Spot Analyses, California, USA

by

Marcel P. Huijser, PhD and James S. Begley, M.Sc.

Western Transportation Institute
College of Engineering, Montana State University, P.O. Box 174250. Bozeman, MT 59717-4250

A report prepared for the
California Department of Transportation
1120 N Street, MS# 27
Sacramento, CA 95817
September 13, 2019

# DISCLAIMER

The contents of this report reflect the views of the authors, who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official policies of the Western Transportation Institute (WTI) or Montana State University (MSU)
This report does not constitute a standard, specification, or regulation.

# ACKNOWLEDGEMENTS

The authors of this report would like to thank the California Department of Transportation (Caltrans) for funding this project. Special thanks are due to the following organizations and individuals who have provided data, other information, and/or reviewed drafts of the final report. Their contributions have been critical to the project's success.

- James (Jim) Henke (Caltrans)
- Lindsay Vivian (Caltrans)
- Christopher Pincetich (Caltrans)

# TECHNICAL DOCUMENTATION

| | | | |
|---|---|---|---|
| **1. Report No.** 4W6693 | **2. Government Accession No.** N/A | **3. Recipient's Catalog No.** N/A | |
| **4. Title and Subtitle** Large mammal-vehicle collision hot spot analyses, California, USA | | **5. Report Date** 13 September 2019<br>**6. Performing Organization Code** | |
| **7. Author(s)** Marcel P. Huijser & James S. Begley | | **8. Performing Organization Report No.** | |
| **9. Performing Organization Name and Address** Western Transportation Institute<br>P.O. Box 174250<br>Montana State University<br>Bozeman, MT 59717-4250 | | **10. Work Unit No. (TRAIS)**<br>**11. Contract or Grant No.** 4W6693 | |
| **12. Sponsoring Agency Name and Address** California Department of Transportation<br>1120 N Street, MS #27<br>Sacramento, CA 95817 | | **13. Type of Report and Period Covered** Research report 2 June 2017-13 September 2019<br>**14. Sponsoring Agency Code** | |
| **15. Supplementary Notes** A PDF version of this report is available from WTI's website at www.westerntransportationinstitute.org | | | |
| **16. Abstract** This report documents the methods and results of hot spot analyses of large wild mammal-vehicle collisions in the state of California, with an emphasis on mule deer. This project relates to all state managed highways in California with a total length of about 15,090 miles (24,285 km). The results of the analyses will help Caltrans make informed decisions on the potential future implementation of mitigation measures aimed at reducing collisions with large wild mammals along highways, specifically mule deer. The goals are to improve human safety, reduce unnatural deaths of large wild mammals (specifically mule deer), while also maintaining or improving habitat connectivity for wildlife in general, regardless of their size or taxonomic group. A statewide hot spot analysis for significant concentrations of deer-vehicle crashes showed regions in the state of California where significantly more deer-vehicle crashes occur than expected, compared to a theoretical random spatial distribution of deer-vehicle crashes. In addition, three descriptive types of Kernel density hot spot analyses were conducted; a state-wide deer-vehicle crash hot spot analysis, per Caltrans district deer-vehicle crash analyses, and per Caltrans district mule deer carcass analyses. These analyses identified the road sections that had the "highest" concentration of deer-vehicle crashes and mule deer carcasses. The hot spots were prioritized based on parameters related to human safety, biological conservation, and economics. Finally, the researchers provided practical guidelines for the implementation of mitigation measures and suggest mitigation strategies for the highest-ranking hot spots in each Caltrans district. | | | |
| **17. Key Words** California, collisions, corridors, crashes, crossing structures, cost-benefit analysis, deer, data analysis, fences, habitat, highway, hot spot, identification, large mammals, mitigation, mule deer, overpasses, plan, procedures, prioritization, ranking, safety, tools, underpasses, wildlife, wildlife-vehicle collisions | **18. Distribution Statement** Unrestricted. This document is available through California Department of Transportation and WTI-MSU. | | |
| **19. Security Classification (of this report)** Unclassified | **20. Security Classification. (of this page)** Unclassified | **21. No. of Pages** 252 | **22. Price** |

# TABLE OF CONTENTS

1. INTRODUCTION ..... 11
1.1. Background ..... 11
1.2. Goals and Objectives ..... 11
2. DEFINE PROBLEM AND DECIDE ON APPROACH ..... 14
2.1. Define the Problem ..... 14
2.2. Decide on the Approach: Avoidance, Mitigation, or Compensation ..... 16
3. LARGE MAMMAL-VEHICLE COLLISION DATA ..... 18
3.1. Project-specific Approach ..... 18
3.2. Search and Reporting Effort ..... 19
3.3. Large Mammal Crash Data ..... 19
3.4. Large Mammal Carcass Removal Data ..... 25
3.5. Discussion ..... 30
4. IDENTIFY CRASH AND CARCASS HOT SPOTS ..... 31
4.1. Introduction ..... 31
4.2. Methods ..... 31
4.3. Results ..... 34
4.4. Discussion ..... 55
5. PRIORITIZATION DEER-VEHICLE CRASH AND MULE DEER CARCASS HOT SPOTS ..... 56
5.1. Introduction ..... 56
5.2. Methods ..... 56
5.3. Results ..... 60
5.4. Discussion ..... 69
6. MITIGATION RECOMMENDATIONS ..... 70
6.1. Introduction to Effective Mitigation Measures ..... 70
6.2. Practical Guidelines for Wildlife Fences ..... 72
6.3. Practical Guidelines for Animal Detection Systems ..... 73
6.4. Practical Guidelines for Wildlife Crossing Structures ..... 74
6.5. Mitigation Recommendations for the Top Crash and Carcass Hot Spots Per District .. 80
7. REFERENCES ..... 86
8. APPENDIX A: STATEWIDE ANALYSIS DEER-VEHICLE CRASH HOT SPOTS ..... 90
9. APPENDIX B: ANALYSES PER DISTRICT DEER-VEHICLE CRASH HOT SPOTS ..105
10. APPENDIX C: ANALYSES PER DISTRICT MULE DEER CARCASSES ..... 186

# LIST OF TABLES

Table 1: The road length within each Caltrans district that was evaluated for this project..... 18
Table 2: Human fatalities because of a crash with livestock, deer, or other animal species or species group. ..... 20
Table 3: Human injuries because of a crash with livestock, deer, or other animal species or species group. ..... 20
Table 4: Human injuries or fatalities because of a crash with livestock, deer, or other species by vehicle type..... 21
Table 5: Human injuries or fatalities because of a crash with livestock, deer, or other species by vehicle type..... 22
Table 6: The number of reported deer crashes per Caltrans district per year..... 24
Table 7: Species and number of reported carcasses in California (2000-2009). ..... 27
Table 8: The number of reported mule deer carcasses per Caltrans district per year..... 29
Table 9: The percentage of deer-vehicle crashes compared to mule deer carcasses per Caltrans district. ..... 30
Table 10: The categories used for maps with the hot spots based on the crash and carcass data. 34
Table 11: The "worst" hot spots based on a statewide analysis for deer-vehicle crashes in the entire state of California. ..... 39
Table 12: The "worst" hot spots based on analyses for deer-vehicle crashes per Caltrans district. ..... 42
Table 13: The "worst" hot spots based on analyses for mule deer carcasses per Caltrans district. ..... 45
Table 14: Economic thresholds (primarily based on human safety parameters) for the implementation of different types and combinations of mitigation measures (based on Huijser et al., 2009). ..... 60
Table 15: The ranking of the hot spots based on a statewide analysis for deer-vehicle crashes in the entire State of California. ..... 61
Table 16: The ranking of the hot spots based on analyses for deer-vehicle crashes per Caltrans district. ..... 62
Table 17: The ranking of the hot spots based on analyses for mule deer carcasses per Caltrans district. ..... 65
Table 18: The ranking of the hot spots based on analyses for mule deer carcasses per Caltrans district. ..... 68
Table 19: Comparison of fences, fences in combination with wildlife crossing structures, and animal detection systems. ..... 71
Table 20. Suggested classification system of wildlife crossing structures. ..... 75
Table 21. Suitability of different types of mitigation measures for selected species (for 2-3 lane highways [25-35 m (82-115 ft)] wide road without median). ..... 76
Table 22: The mitigation recommendations for the top hot spots based on analyses for deer-vehicle crashes per Caltrans district. ..... 82
Table 23: The mitigation recommendations for the top hot spots based on analyses for mule deer carcasses per Caltrans district..... 84

# LIST OF FIGURES

Figure 1: The 12 Caltrans districts. ..... 13
Figure 2: The effects of roads and traffic on wildlife. ..... 15
Figure 3: A three step approach: A. Avoidance, B. Mitigation, C. Compensation, D. Combination of avoidance, mitigation and compensation. ..... 17
Figure 4: Distribution of reported deer crashes per month (n=6,922 in total). ..... 22
Figure 5: Distribution of reported deer-vehicle crashes by hour of day (per month and for all months combined). ..... 23
Figure 6: Number of reported deer-vehicle crashes per year in the state of California. ..... 25
Figure 7: Distribution of reported mule deer carcasses per month in California over a ten-year period (2000 through 2009). ..... 28
Figure 8: Significant hot spots (red) and cold spots (blue) based on a statewide analysis of deer-vehicle crashes. ..... 35
Figure 9: The "worst" hot spots based on a statewide analysis for deer-vehicle crashes in the entire state of California. ..... 38
Figure 10: The "worst" hot spots based on deer-vehicle crashes within each Caltrans district. .. 40
Figure 11: The "worst" hot spots based on mule deer carcasses within each Caltrans district. ... 41
Figure 12: The locations of the reported black bear carcasses. ..... 49
Figure 13: The locations of the reported elk carcasses. ..... 50
Figure 14: The locations of the reported mountain lion carcasses. ..... 51
Figure 15: The locations of the reported bighorn sheep carcasses. ..... 52
Figure 16: The locations of the reported pronghorn carcasses. ..... 53
Figure 17: The locations of the reported wild boar carcasses. ..... 54
Figure 18: "Natural Landscape Block" or an "Essential Connectivity Area" from the California Essential Habitat Connectivity Project (Spencer et al., 2010). ..... 57
Figure 19: Critical habitat for threatened or endangered species (USFWS, 2019). ..... 58
Figure 20: Schematic representation of home ranges for two theoretical species projected on a road and the distance between safe crossing opportunities (distance is equal to the diameter of their home range). ..... 79
Figure 21: Schematic representation of home ranges and interval between safe crossing opportunities. ..... 79

# EXECUTIVE SUMMARY

This report documents the methods and results of hot spot analyses of large wild mammal-vehicle collisions in the state of California, with an emphasis on mule deer. This project relates to all state managed highways in California with a total length of about 15,090 miles (24,285 km) (ignoring multiple lanes). The results of the analyses will help Caltrans make informed decisions on the potential future implementation of mitigation measures aimed at reducing collisions with large wild mammals along highways, specifically mule deer. The goals are to improve human safety, reduce unnatural deaths of large wild mammals (specifically mule deer), while also maintaining or improving habitat connectivity for wildlife in general, regardless of their size or taxonomic group. Note that in the context of this report "mitigation" refers to measures aimed at reducing impacts of roads and traffic on wildlife. In this report "mitigation" never refers to any regulatory or legal framework. However, the "mitigation measures" suggested in this report may assist Caltrans and natural resource agencies with their permitting negotiations.

Two data sources were used to identify large wild mammal-vehicle collision hot spots: crash data collected by law enforcement personnel and carcass removal data collected by road maintenance crews. Note that in this report, the term "collisions" refers to both crash data and carcass data. Deer-vehicle crashes represented 65.6% of the animal-vehicle crashes, followed by livestock (11.0%) and unidentified other species (23.4%). Most of the reported carcasses of large wild animal species (larger than a coyote) also related to mule deer (97.8%). Therefore, all further analyses were carried out with either deer-vehicle crashes or mule deer carcasses. Deer-vehicle collisions were more numerous from May through November compared to December through April, with the highest numbers occurring in October and November. Deer crashes occur mostly at night, especially around dusk (5-10 pm) and dawn (5-7 am). Overall, the number of reported deer-vehicle crashes increased significantly during the study period (2005 through 2014). These seasonal, day-night, and trend patterns are similar to other studies.

There was no evidence of inconsistent reporting effort between years or between Caltrans districts for the deer-vehicle crash data. However, there was evidence of substantial underreporting of mule deer carcasses compared to deer-vehicle crash data in all Caltrans districts except District 10. In addition, there was evidence of inconsistent reporting effort between years, between Caltrans districts, and within certain Caltrans districts for the deer-vehicle crash data. Therefore, the researchers only conducted statewide analyses for deer-vehicle crashes, and not for mule deer carcasses. Additional hot spot analyses were carried out for all Caltrans districts for both deer-vehicle crashes and mule deer carcasses.

A statewide hot spot analysis for significant concentrations of deer-vehicle crashes showed regions in the state of California where significantly more deer-vehicle crashes occur than expected compared to a theoretical random spatial distribution of deer-vehicle crashes. Regions with a significantly high concentration of deer-vehicle crashes (hot spots) include the areas around:

- Yreka/Mt Shasta.
- The coastal areas between Eureka and Fort Bragg.
- The foothills and Sierra Nevada north and south-east of Sacramento.

- The eastern slopes of the Sierra Nevada and desert around Susanville.
- The western slopes of the Sierra Nevada near Merced.
- The eastern slopes of the Sierra Nevada near Mono Lake and Mammoth Lakes.
- The coastal areas between San Francisco until just south of Carmel-by-the-Sea.
- The coastal areas near San Simeon until Santa Barbara.

Regions with a significantly low concentration of deer-vehicle crashes (cold spots) include the areas around:

- The southern portion of the Central Valley around Modesto until south of Bakersfield.
- The deserts north and east of Los Angeles and San Diego.

In addition, three descriptive types of Kernel density hot spot analyses were conducted. These analyses identify the road sections that have the "highest" concentration of deer-vehicle crashes and mule deer carcasses given the distribution of the other crashes or carcasses. The first descriptive analysis related to all deer-vehicle crash data from all highways in the state of California. This resulted in the identification of 13 hot spots spread over northern California, the Sierra Nevada, and the coastal ranges. The second type of descriptive analysis consisted of deer-vehicle crash hot spot analyses within each Caltrans district. Similarly, the third type of descriptive analysis consisted of mule deer carcass hot spot analyses within each Caltrans District.

In some districts (Caltrans Districts 2, 4, 6, 9, 10, and 12) there was at least some spatial similarity between the hot spots based on deer-vehicle crash data and mule deer carcass data. Since these two data sources are independent, this makes it more likely that there is indeed a relatively high concentration of deer-vehicle collisions along these road sections. However, there is also evidence of missing mule deer carcass data from certain areas in Districts 1 and 2.

The project data suggest that mule deer-vehicle carcasses are not only underreported compared to deer-vehicle crash data, but that there are also spatial inconsistencies in the search and reporting effort for mule deer carcasses. Practical suggestions include verification that all maintenance crews do record and submit mule deer carcasses, especially along road sections already identified as hot spots based on deer-vehicle crash data, and that these records are entered in the central database. Regular data entry and standard data summary reports can help identify areas from which mule deer carcasses are substantially below the expected number of observations.

The hot spots that were identified based on the descriptive Kernel density hot spot analyses were prioritized based on parameters related to human safety, biological conservation, and economics. The three types of parameters were weighted equally in the prioritization process. However, it is important to remember that the human safety parameters were the departure point for these analyses. This means that all the hot spots, by definition, had a relatively high number and concentration of deer-vehicle crashes or mule deer carcasses already.

The economic parameter expressed the number of deer-vehicle crashes or mule deer carcasses in costs per mile per year related to the deer collisions. Only some of the hot spots met or exceeded the economic thresholds for the implementation of wildlife fences in combination with wildlife

crossing structures or animal detection systems. However, the values of the economic parameter for the different hot spots should not be compared to the thresholds as if it was a litmus test for implementing or not implementing a mitigation project. The thresholds are primarily based on human safety parameters and exclude passive values associated with biological conservation; they are very conservative by nature. In addition, there is evidence of severe underreporting of mule deer carcasses. While the researchers strongly advise to use the cost-benefit analyses as an important decision support tool, they also urge users to recognize that these analyses are only one of the factors that should be considered in the decision-making process.

The researchers selected the highest-ranking deer-vehicle crash or mule deer hot spots within each Caltrans district and formulated mitigation recommendations. The researchers aimed to identify the five worst hot spots in each district. However, in some districts there were fewer hot spots present (less than five), and in some other districts there were more than five hot spots that met the requirements to be indicated as a hot spot.

While there are dozens of different types and combinations of mitigation measures, there are only two types of mitigation packages that can substantially reduce collisions with large wild mammals:

1. Wildlife fences in combination with wildlife crossing structures (underpasses or overpasses);
2. Animal detection systems, either as a stand-alone measure or at a gap in the fence.

Fences in combination with wildlife crossing structures address both objectives; collision reduction and providing safe crossing opportunities for wildlife. However, animal detection systems do not make it any easier for animals to cross a road. To get to the other side of the highway, animals still must cross an open area with unnatural substrate and avoid the vehicles that drive on the road. Therefore, animal detection systems should only be considered if reducing collisions with large mammals is the only objective. Animal detection systems should not be considered if increasing habitat connectivity is also an objective. The researchers provide practical guidelines for the implementation of mitigation measures and suggest mitigation strategies for the highest-ranking hot spots in each Caltrans district.

Practical guidelines for the implementation of mitigation measures, especially wildlife fences in combination with large mammal crossing structures:

1. Focus on hot spots with a relatively high number of collisions first. If there are less than 10 reported deer-vehicle crashes or less than 10 reported mule deer carcasses in a hot spot, implementation of mitigation measures is relatively risky compared to sites that have greater collision numbers. The identification of hot spots with low numbers is less robust than the identification of hot spots with higher numbers. The authors of this report suggest minimizing the risk of investing in mitigation measures by focusing on hot spots that are likely to be a substantial and consistent hot spot rather than a less important hot spot or a hot spot that may have been wrongly identified because of variations in the number of collisions.

2. Interview law enforcement personnel and road maintenance personnel in the first phase of exploring the potential implementation of mitigation measures. Get confirmation that it is indeed a "bad spot" for deer-vehicle collisions, and get confirmation about the exact road section (start and end points).

3. Some hot spots appear particularly difficult or costly to mitigate. The presence of 8-12 lanes of traffic, frontage roads, intersections, private lands, residential and commercial development, etc. all make it more challenging to effectively mitigate a hot spot. These types of challenges are "ignored" in the ranking of the hot spots. However, the challenges of each hot spot should be carefully weighed when proceeding with the planning, design, and implementation of mitigation measures.

4. Carefully evaluate what species other than mule deer may require mitigation for direct road mortality or the barrier effect along the road section that is considered for mitigation. Consult spatial and biological databases, interview representatives from natural resource management agencies, interview people with local knowledge and experience. Modify or add to the list of target species as it may well influence the design of the mitigation measures.

5. In general, the first choice or recommendation for mitigating a hot spot is a wildlife fence in combination with designated wildlife crossing structures. Implement large mammal fences (2.4 m high (8 ft)) along the full length of a hot spot and buffer zones that span an additional 1,600 m (1.0 mile) from each end of the hot spot. As a general principle, provide a crossing structure that is suitable for mule deer (at least 7-8 m (23-26 ft) wide, 4-5 m (13-16 ft) high) once every 2,400 m (1.49 mile) in the fenced road section. With reduced ambition levels (i.e. address only collisions with large mammals, do not provide safe crossing opportunities for wildlife) animal detection systems are suggested as a second choice for road sections with less than 5,000 vehicles per day.

6. If there were existing structures in a hot spot, identified through satellite images, these were noted in the tables. However, structures primarily designed for motorized vehicles were not listed. Nonetheless, very long bridges with only small or unpaved roads were included as an existing structure that may be adapted to also allow for wildlife use. In addition to connecting these structures to wildlife fences, the structures may need some modifications to make them suitable for wildlife use. These modifications will likely vary between the structures, and some structures may not need any modifications.

7. In general, structures for mule deer should be considered about every 2,400 m (1.49 mile). This means that long hot spots may need multiple crossing structures. These structures can be any combination of existing structures originally built for other purposes and designated wildlife crossing structures. Fences may extend into adjacent buffer zones, and there may be additional existing structures in those areas. Tying these existing structures into the wildlife fence and allowing potential wildlife use through these structures makes sense, as long as it is compatible with the primary use of a structure and the land use in the areas surrounding the structure.

# 1. INTRODUCTION

## 1.1. Background

Wildlife-vehicle collisions affect human safety, property (damage), and wildlife. The total number of large mammal–vehicle collisions has been estimated at one to two million in the United States annually (Conover et al., 1995; Huijser et al., 2009). These collisions have been estimated to cause 211 human fatalities, 29,000 human injuries, and over one billion US dollars in property damage annually (Conover et al., 1995). More recent estimates that include costs associated with human injuries and human fatalities estimate the yearly costs associated with wildlife-vehicle collisions between 6 and 12 billion US dollars (Huijser et al., 2009). In most cases, the animals die immediately or shortly after the collision (Allen & McCullough, 1976). In some cases, it is not just the individual animals that suffer. Road mortality may also affect some species on the population level (e.g., van der Zee et al., 1992; Huijser & Bergers, 2000), and some species may even be faced with a serious reduction in population survival probability as a result of road mortality, habitat fragmentation, and other negative effects associated with roads and traffic (Proctor, 2003; Huijser et al., 2008). In addition, some species also represent a monetary value that is lost once an individual animal dies (Romin & Bissonette, 1996; Conover, 1997).

The highways in the state of California are important for local, state and interstate travel. However, the frequency of large wild mammal-vehicle collisions, specifically with mule deer (or black-tailed deer) (*Odocoileus hemionus*), was considered high enough for Caltrans to explore procedures and tools to identify and prioritize large wild mammal-vehicle collision hot spots, with an emphasis on mule deer. The authors of this report identified large wild mammal-vehicle collision hot spots, and then prioritized these hot spots based on human safety, biological conservation, and cost-benefit analyses. The authors of this report then formulated mitigation measures aimed at reducing large wild mammal-vehicle collisions and at providing safe crossing opportunities for a wide range of wildlife species, regardless of their size or taxonomic group. Note that in the context of this report “mitigation” refers to measures aimed at reducing impacts from roads and traffic on wildlife. In this report “mitigation” never refers to any regulatory or legal framework. However, the “mitigation measures” suggested in this report may assist Caltrans and natural resource agencies with their permitting negotiations.

## 1.2. Goals and Objectives

This project aims to conduct a statewide hot spot analysis of large wild mammal-vehicle collisions in the state of California, with an emphasis on mule deer. This project relates to all state managed highways in California. The total length of these highways is estimated at about 15,090 miles (24,285 km) (total length of the highways, ignoring multiple lanes). The results of the analyses will help Caltrans make informed decisions on the potential future implementation of mitigation measures aimed at reducing collisions with large wild mammals along highways, specifically mule deer. The goals are to improve human safety, reduce unnatural deaths of large wild mammals (specifically mule deer), while also maintaining or improving habitat connectivity for wildlife in general, regardless of their size or taxonomic group. This project is based on the

methods developed from a pilot study conducted in Caltrans District 10 titled "Procedures and Tools for Wildlife-Vehicle Collision Hotspot Analyses; Using Caltrans District 10 as an Example" (Huijser et al., 2014).

The objectives for the current project are to:

1. Provide a sound methodology to identify highway sections in the state of California that have the highest concentration of collisions with large wild mammals, namely mule deer, in specific ("hot spots").

   Conduct two types of analyses:
   a. Statewide analysis that identifies and prioritizes the "worst" hot spots in the state.
   b. Analyses per Caltrans district that identify and prioritize the "worst" hot spots within each of the 12 Caltrans districts (Figure 1).

2. Prioritize the hot spots based on:
   a. Human safety data based on large wild mammal-vehicle and mule deer crash data, and carcass removal data.
   b. Biological conservation data derived from the California Essential Habitat Connectivity analyses (Spencer et al., 2010) and critical habitat data (USFWS, 2019).
   c. Cost-benefit data on the cost of wildlife-vehicle collisions and the implementation of mitigation measures aimed at reducing large wild mammal-vehicle collisions and providing connectivity for a wide range of species, regardless of their size or taxonomic group. The measures include wildlife fences combined with wildlife crossing structures (overpasses and underpasses) and animal detection systems. These mitigation measures do (wildlife fences combined with crossing structures) or can (animal detection systems) reduce collisions with large mammals substantially (i.e. >80%). However, animal detection systems should be considered experimental and do not address the barrier effect of highways. These systems should still be considered experimental because many systems have challenges with reliably detecting the target species, and many projects fail because of technological, management, maintenance, or financial problems. Furthermore, animal detection systems do not address the barrier effect of highways as the animals are still required to cross an open area with unnatural substrate (pavement) and confront the disturbance and danger posed by traffic.

   The outcome of the prioritization process can be used to assist Caltrans with funding decisions and prioritizing transportation investments in the State Highway Operations and Protection Plan within each district.

The procedures, tools, and outcomes of this project should be aligned with the Caltrans 2015-2020 Strategic Plan and goals related to Safety and Sustainability.




**Figure 1: The location of the 12 Caltrans districts.**

# 2. DEFINE PROBLEM AND DECIDE ON APPROACH

## 2.1. Define the Problem

Implementation of measures aimed at reducing wildlife-vehicle collisions requires knowledge about the locations of these collisions. Along most roads in North America there are two types of wildlife-vehicle collision data that can help identify the "worst" road sections:

- **Crash data:** These data are typically collected by law enforcement personnel. For a crash to be entered into the database there is often a threshold (e.g. the minimum estimated vehicle repair cost is at least US $1,000 and/or there are human injuries and human fatalities) (Huijser et al., 2007).
- **Carcass data:** These data are typically collected by road maintenance crews when they remove carcasses of large mammals that are on the road or that are very visible from the road in the right-of-way and that are an immediate safety hazard or a distraction to drivers (Huijser et al., 2007). Note that carcass data are sometimes also collected or recorded by others, e.g. by personnel from natural resource management agencies, researchers, or the general public.

Both types of collision data tend to relate to large mammals only; medium-sized and small-sized mammals and other species groups such as amphibians, reptiles and birds are usually inconsistently recorded or not recorded at all (Huijser et al., 2007). Furthermore, crash data typically represent only a fraction (14-50%) of the carcass data, even if both data sets relate to large mammals only (Tardif and Associates Inc., 2003; Riley & Marcoux, 2006; Donaldson & Lafon, 2008). Finally, the carcass data are far from complete as well; animals that are not very visible from the road in the right-of-way may not be removed and do not get recorded. Wounded animals that make it beyond the right-of-way fence before they die are also usually not recorded at all.

If only wildlife-vehicle collision data are used to identify and prioritize locations along highways that that may require wildlife mitigation measures, then the concern is typically primarily with human safety and reducing collisions with common large wild mammals. Depending on the region in North America, the most common large wild mammals and the most frequently hit large wild mammal species include ungulates such as white-tailed deer (*Odocoileus virginianus*), mule deer (*Odocoileus hemionus*), elk (*Cervus canadensis*) and moose (*Alces americanus*).

If the concern is with direct road mortality for species or species groups other than common large wild mammals, then data sources other than crash data and carcass removal data may be required. A specific road-kill monitoring program may have to be developed as roadkill data on small and rare species are typically not available. Depending on the exact goals of the project and the associated requirements such data may be collected by personnel from natural resource management agencies, researchers or the public. Small species may require monitoring with slow speed, perhaps even traveling on foot (e.g. Teixeira et al., 2013). Rare species are not only rarely encountered, but the carcasses may be removed (legally or illegally) by others before agency personnel, researchers, or citizen scientists come by. If the interest is to reduce road mortality of

rare species, it becomes increasingly likely that reducing roadkill is not only or not primarily about human safety; it becomes more about biological conservation. In this context, it may be a good strategy to not only focus on current road mortality hot spots, but to also address historic roadkill hot spots that may have acted as a population sink in the past and where the population is now so depleted that it no longer shows up as a hot spot for collisions (Teixeira et al., 2017). Therefore, sites that require mitigation for rare species may need to be primarily based on suitable habitat or corridors instead of carcass and crash data, which are inherently rare.

While there is much emphasis on mitigating for large mammal-vehicle collisions in North America, crashes, dead animals, and associated costs and risks to humans are not the only reason mitigation for wildlife along highways may be considered (Van der Ree et al., 2015). The authors of this report distinguish five different categories of effects of roads and traffic on wildlife (Figure 2):

- Habitat loss: e.g., the paved road surface, heavily altered environment through the road bed with non-native substrate, and seeded species and mowing in the clear zone.
- Direct wildlife road mortality as a result of collisions with vehicles.
- Barrier to wildlife movements: e.g., animals do not cross the road as often as they would have crossed natural terrain and only a portion of the crossing attempts is successful.
- Decrease in habitat quality in a zone adjacent to the road: e.g., noise and light disturbance, air and water pollution, increased access to the areas adjacent to the highways for humans.
- Right-of-way habitat and corridor: Depending on the surrounding landscape the right-of-way can promote the spread of non-native or invasive species (surrounding landscape largely natural or semi-natural) or it can be a refugium for native species (surrounding landscape heavily impacted by humans).

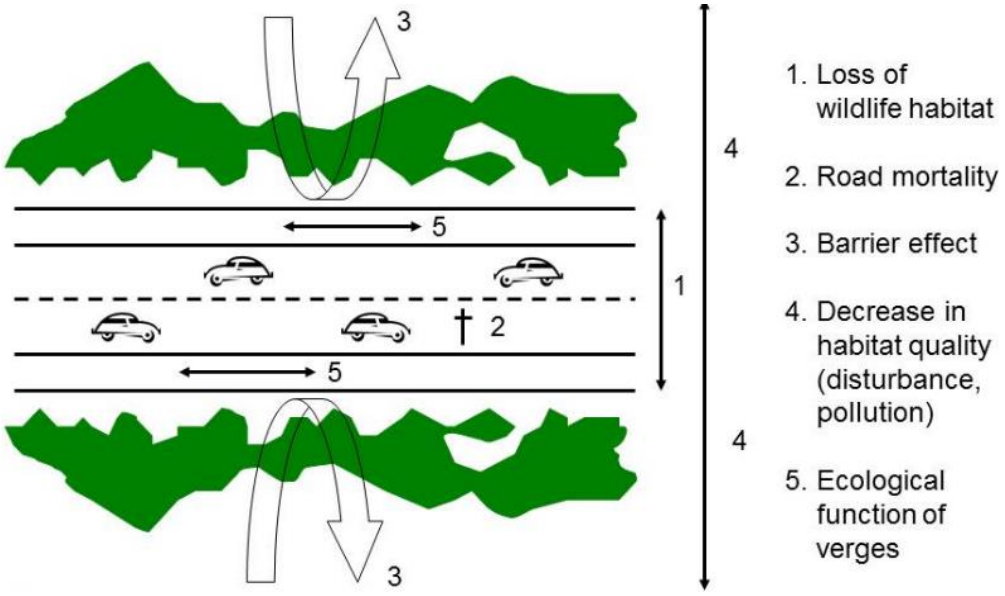



**Figure 2: The effects of roads and traffic on wildlife.**

If mitigation is required for habitat loss, barrier effects, a decrease in habitat quality in a zone adjacent to the road, or the ecological functioning of rights-of-way, other types of data are needed than wildlife-vehicle collision data. Examples of such data are data on the quantity and quality of the habitat impacted, animal movement data, data on noise or chemical pollutants, and the presence of non-native invasive species.

## 2.2. Decide on the Approach: Avoidance, Mitigation, or Compensation

While mitigation (reducing the severity of an impact) is common, avoidance is better and should generally be considered first (Cuperus et al., 1999). For example, the negative effects of roads and traffic may be avoided if a road is not constructed, or the most severe negative effects may be avoided by re-routing away from the most sensitive areas (Figure 3). If the effects cannot be avoided, mitigation is a logical second step. Mitigation is typically done in the road-effect zone (Figure 3) and may include measures aimed at reducing wildlife-vehicle collisions and reducing the barrier effect (e.g., through providing for safe wildlife crossing opportunities) (Huijser et al., 2008; Clevenger & Huijser, 2011). However, mitigation may not always be possible, or the mitigation may not be sufficient. In such situations, a third approach may be considered: compensation or mitigation off-site. Compensation may include increasing the size existing habitat patches, creating new habitat patches, or improving the connectivity between the habitat patches that would allow for larger, more connected, and more viable network populations. Finally, in some situations, a combination of avoidance, mitigation, and compensation may be implemented.

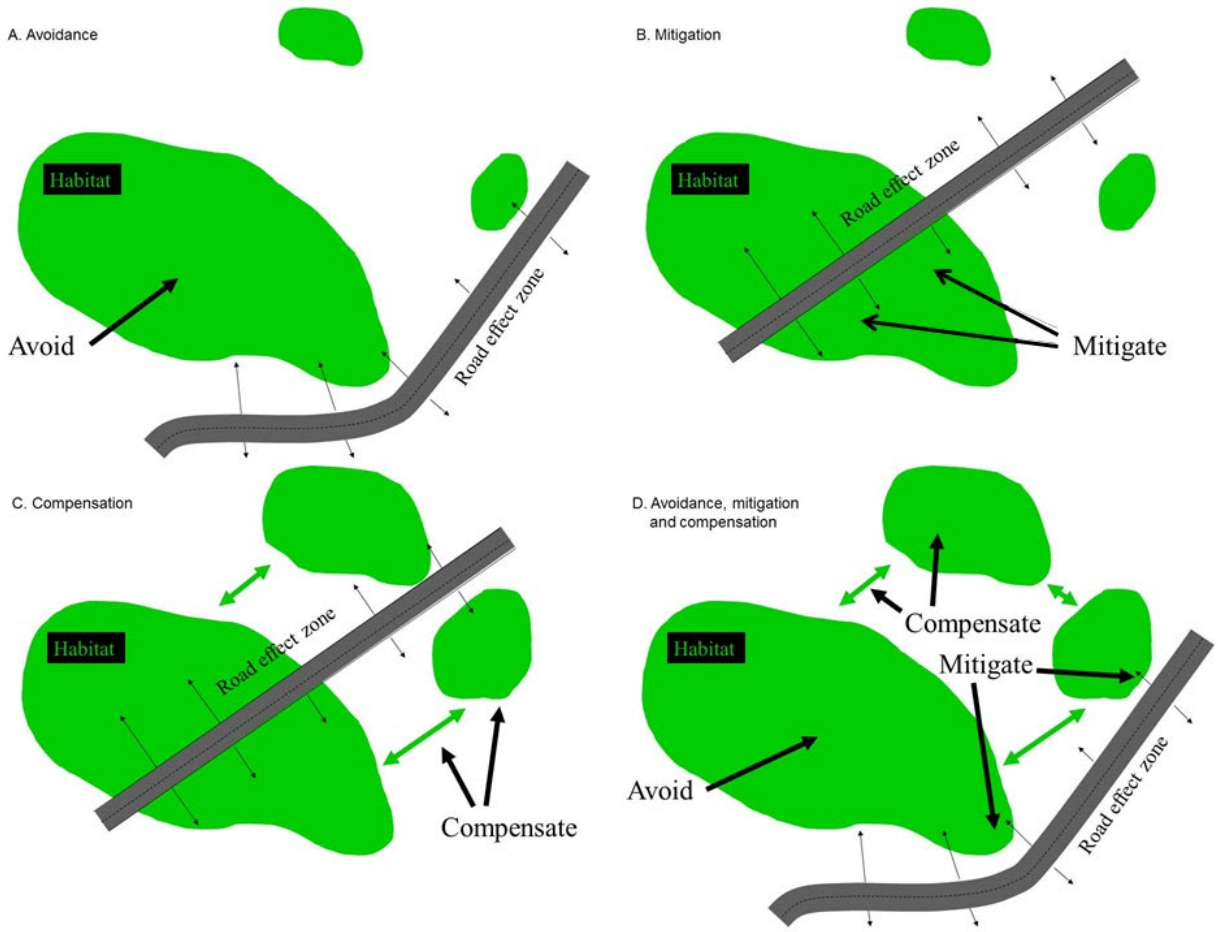



**Figure 3: A three step approach: A. Avoidance, B. Mitigation, C. Compensation, D. Combination of avoidance, mitigation and compensation.**

# 3. LARGE MAMMAL-VEHICLE COLLISION DATA

## 3.1. Project-specific Approach

This chapter describes the large mammal-vehicle crash data and carcass removal data used to identify and prioritize wildlife-vehicle collision hot spots. The authors evaluated large mammal-vehicle collision data along 15,090 miles (24,285 km), spread over all 12 Caltrans districts (Table 1).

**Table 1: The road length within each Caltrans district that was evaluated for this project.**

| District | Road length (miles) |
|---|---|
| 1 | 942.65 |
| 2 | 1,724.85 |
| 3 | 1,497.20 |
| 4 | 1,410.70 |
| 5 | 1,154.65 |
| 6 | 1,794.75 |
| 7 | 1,128.35 |
| 8 | 1,827.05 |
| 9 | 958.95 |
| 10 | 1,323.55 |
| 11 | 1,050.70 |
| 12 | 276.80 |
| Total | 15,090.20 |

The researchers used two datasets to identify large mammals-vehicle collision hot spots:

- Large mammal-vehicle crash data recorded by California Highway Patrol (Traffic Accident Surveillance and Analysis System data ("TASAS")).
- Carcass removal data recorded by Caltrans maintenance personnel (Animal Vehicle Collision data ("AVC") later replaced by Integrated Maintenance Management System data ("IMMS")).

These two data sets are described and summarized in further detail in the following sections. Note that in this report the term "collisions" refer to both crashes and carcasses.

## 3.2. Search and Reporting Effort

For the data analyses described in this report (trend over time, hot spot analyses) the researchers assumed that the search and reporting effort between the different years, districts and road sections within a district were consistent. If the search and reporting effort varies between years, it may not be appropriate to use the data to investigate if there are changes (increase or decrease) in the number of wildlife-vehicle collisions over the years. If the search and reporting effort varies between districts or road sections within a district, it may not be appropriate to use the data to investigate if there are concentrations of wildlife-vehicle collisions along certain road sections either on a statewide level or on a district level.

While a consistent search and reporting effort is essential for analyzing temporal and spatial trends, it is not assumed that every wildlife-vehicle collision (e.g. deer-vehicle crash or mule deer carcass) ends up in the crash database or the carcass removal database. Consistent search and reporting effort can relate to only a fraction of the actual number of collisions. What matters is that a crash or carcass has similar likelihood of being recorded in different years (for temporal analyses to investigate if the deer-vehicle collisions may have increased or decreased over the years) and similar likelihood of being recorded in different districts or on different road sections within a district (for spatial analyses to investigate if there are concentrations of deer-vehicle collisions on certain road sections ("hot spots")).

The search and reporting effort for crash data is typically lower than for carcass removal data (Tardif and Associates Inc., 2003; Riley & Marcoux, 2006; Donaldson & Lafon, 2008). For a crash to be included in the crash database in the state of California, there must be human injuries or human fatalities associated with the crash or the estimated damage to property has to be at least US $500 (Caltrans, 2013). However, depending on the severity of a reported crash, other tasks, and the distance to the crash site, there is not always sufficient law enforcement personnel available to respond and record the crash. For a carcass to be included in the carcass removal database, Caltrans personnel must have gone out and removed a carcass. The presence of a carcass is reported to Caltrans maintenance crews in the following manners (Personal communication Caltrans maintenance personnel in Pinegrove and Jamestown, Caltrans District 10):

- Telephone call by the public.
- Reports from Caltrans personnel commuting to and from work.
- Requests from law enforcement personnel/dispatch.
- Observations by Caltrans maintenance personnel on route to or from an assigned task.
- Observations by Caltrans maintenance personnel conducting regular road inspections.

## 3.3. Large Mammal Crash Data

The large mammal crash data related to the period 1 January 2005 through 31 December 2014 (the most recent 10 years data were available for). There were 10,552 reported crashes with either livestock, deer, or other animals (Table 2). There were 25 crashes with 28 human fatalities, mostly with deer (Table 2). There were 1,351 crashes with 1,617 human injuries, also mostly

with deer (Table 3). The probability that a deer-vehicle crash results in at least one human injury was 12.22% (847 out of 6,922). For human fatalities this was 0.19% (13 out of 6,922).

**Table 2: Human fatalities because of a crash with livestock, deer, or other animal species or species group.**

| Human fatalities in an individual crash (n) | Crashes (n) | | | |
|---|---|---|---|---|
| | Livestock | Deer | Other species | Total |
| 0 | 1,156 | 6,909 | 2,462 | 10,527 |
| 1 | 6 | 12 | 4 | 22 |
| 2 | 0 | 1 | 2 | 3 |
| | | | | |
| Total crashes (n) | 1,162 | 6,922 | 2,468 | 10,552 |
| Total crashes (% of total) | 11.01 | 65.60 | 23.39 | 100.00 |
| | | | | |
| Total crashes with human fatalities (n) | 6 | 13 | 6 | 25 |
| Total crashes with human fatalities (% of total) | 24.00 | 52.00 | 24.00 | 100.00 |

**Table 3: Human injuries because of a crash with livestock, deer, or other animal species or species group.**

| Human injuries in an individual crash (n) | Crashes | | | |
|---|---|---|---|---|
| | Livestock | Deer | Other species | Total |
| 0 | 954 | 6,075 | 2,172 | 9,201 |
| 1 | 149 | 736 | 240 | 1125 |
| 2 | 49 | 102 | 48 | 199 |
| 3 | 3 | 7 | 7 | 17 |
| 4 | 6 | 1 | 0 | 7 |
| 5 | 1 | 1 | 1 | 3 |
| | | | | |
| Total crashes (n) | 1,162 | 6,922 | 2,468 | 10,552 |
| Total crashes (% of total) | 11.01 | 65.60 | 23.39 | 100.00 |
| | | | | |
| Total crashes with human injuries (n) | 208 | 847 | 296 | 1,351 |
| Total crashes with human injuries (% of total) | 15.40 | 62.69 | 21.91 | 100.00 |

Most of the crashes were with passenger cars (7,764 out of 10,552 crashes) (Table 4). However, the percentage of crashes that resulted in at least one human injury or human fatality was 5.72% for pickup trucks (vehicle type D), 9.66% for passenger cars (vehicle type A), and 91.13% for motorcycles (vehicle type C) (Table 4). For passenger cars, the percentage of human injuries or human fatalities was higher with livestock crashes (22.36%) compared to crashes with "deer" or other species (Table 5). The same applied to pickup trucks (9.88%), but for motorcyclists the percentage of human injuries or human fatalities was at least 90% regardless of the species group involved (Table 5).

**Table 4: Human injuries or fatalities because of a crash with livestock, deer, or other species by vehicle type.**

| | Crashes with human injuries or fatalities (n) | | | Crashes with at least one human injury or fatality (%) |
|---|---|---|---|---|
| **Vehicle type** | None | ≥1 | Total | |
| A-Passenger car / station wagon | 7,014 | 750 | 7,764 | 9.66 |
| B-Passenger car with trailer | 12 | 1 | 13 | 7.69 |
| C-Motorcycle | 47 | 483 | 530 | 91.13 |
| D-Pickup / panel truck | 1,253 | 76 | 1,329 | 5.72 |
| E-Pickup / panel truck with trailer | 53 | 5 | 58 | 8.62 |
| F-Truck / truck tractor | 48 | 4 | 52 | 7.69 |
| G-Truck / tractor and 1 trailer | 204 | 8 | 212 | 3.77 |
| H-School bus | 20 | 1 | 21 | 4.76 |
| I-Other bus | 22 | 1 | 23 | 4.35 |
| J-Emergency vehicle | 404 | 28 | 432 | 6.48 |
| L-Bicycle | 0 | 3 | 3 | 100.00 |
| M-Other-motor vehicle | 43 | 1 | 44 | 2.27 |
| N-Other non-motor vehicle | 1 | 0 | 1 | 0.00 |
| 2-Truck / tractor & 2 trailers | 32 | 2 | 34 | 5.88 |
| U-Pedestrian | 1 | 6 | 7 | 85.71 |
| Unknown | 27 | 1 | 28 | 3.57 |
| V-Dismount pedestrian | 1 | 0 | 1 | 0.00 |

**Table 5: Human injuries or fatalities because of a crash with livestock, deer, or other species by vehicle type.**

| Species group | Human injuries or fatalities (n) | A-Passenger car / station wagon | C-Motorcycle | D-Pickup / panel truck |
|---|---|---|---|---|
| Livestock | None | 552 | 0 | 228 |
| | ≥1 | 159 | 14 | 25 |
| | ≥1 (%) | 22.36 | 100.00 | 9.88 |
| Deer | None | 4,703 | 37 | 820 |
| | ≥1 | 410 | 378 | 38 |
| | ≥1 (%) | 8.02 | 91.08 | 4.43 |
| Other species | None | 1,759 | 10 | 205 |
| | ≥1 | 181 | 91 | 13 |
| | ≥1 (%) | 9.33 | 90.10 | 5.96 |

For the following sections and chapters of this report that are based on crash data, we selected deer-vehicle crashes (i.e. we excluded "livestock" and "other species"). Deer-vehicle crashes were more numerous from May through November compared to December through April, with the highest numbers occurring in October and November (Figure 4).

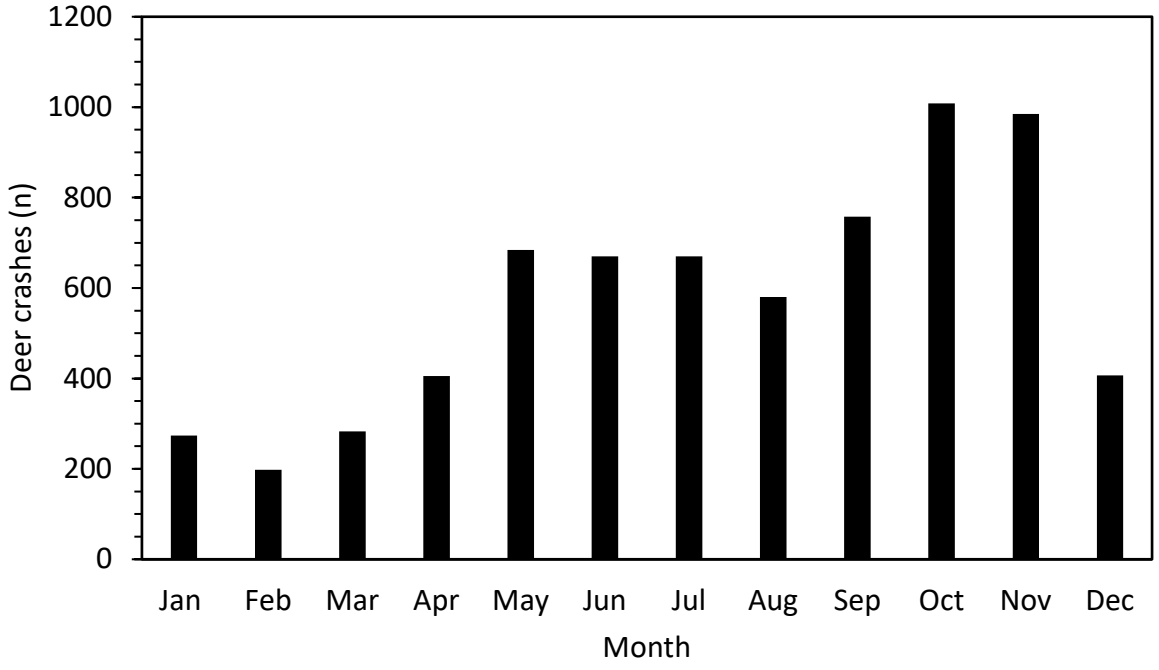



**Figure 4: Distribution of reported deer crashes per month (n=6,922 in total).**

Deer-vehicle crashes occur mostly at night, especially around dusk (5-10 pm) and dawn (5-7 am) (Figure 5). There is a noticeable effect of shorter days in the winter, and dusk occurring earlier at the end of the afternoon and early evening. Deer-vehicle crashes peak around 5-7 pm in November and December, compared to around 8-10 pm in June and July. The seasonal effect on the hour of day is less pronounced for the peak in the morning hours.

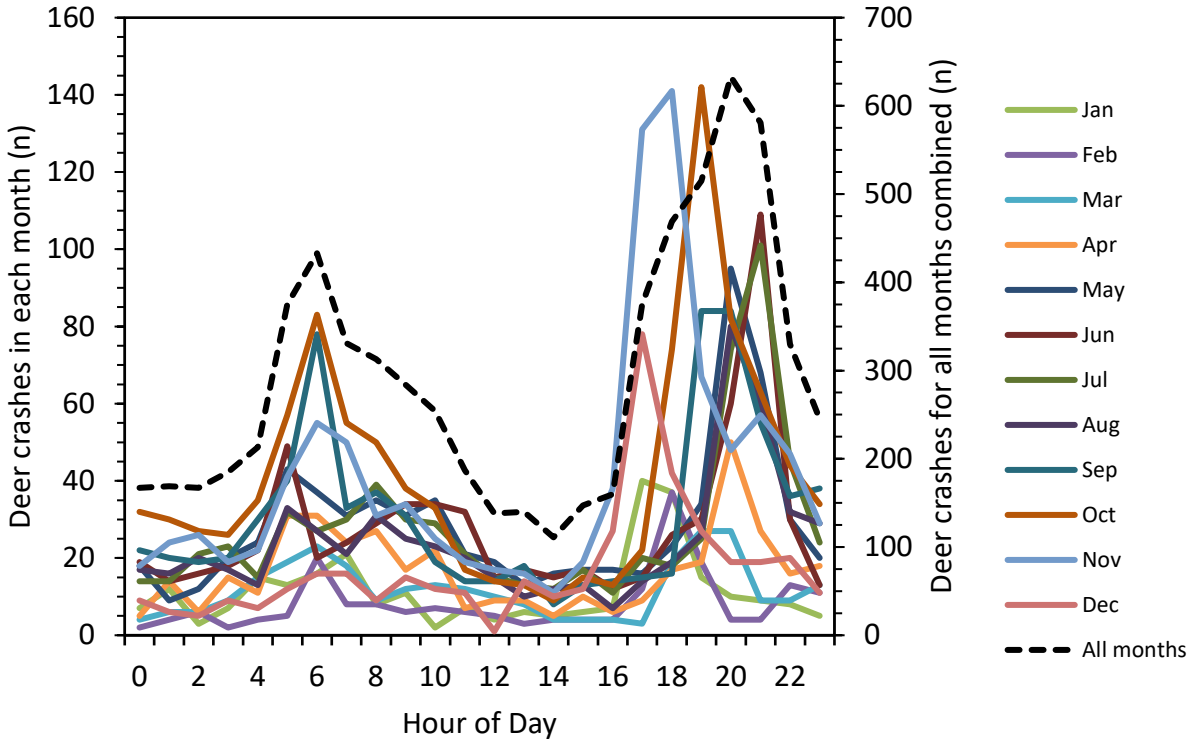



**Figure 5: Distribution of reported deer-vehicle crashes by hour of day (per month and for all months combined).**

The number of deer-vehicle crashes within each district per year was relatively consistent (Table 6). This suggests that, within each district, the search and reporting effort for deer-vehicle crashes was relatively constant throughout the data collection period (2005 through 2014), and that hot spot analyses within each district are justified. The lowest number of records in a district (total for 10 years) was 103 (District 12), which the authors of this report considered high enough for a meaningful hot spot analysis within that district. The relatively constant search and reporting effort within each of the districts also means that the individual districts had a relatively consistent share of the total number of deer-vehicle crashes in the entire state of California, and that the total number of deer-vehicle collisions in the entire state is also relatively constant (Table 6). This suggests that statewide hot spot analyses are also justified. Nonetheless, it is still possible that the search and reporting effort varied between the 12 districts. However, investigating such potential differences in search and reporting effort between the individual districts is complicated and confounded by likely differences between the districts in deer population size and movements, and traffic volume, even when the number of deer-vehicle crashes would be corrected for the total road length within each district.

**Table 6: The number of reported deer crashes per Caltrans district per year.**

| District | Total (n) | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 790 | 77 | 64 | 70 | 78 | 75 | 66 | 72 | 94 | 103 | 91 |
| 2 | 1,366 | 110 | 115 | 155 | 140 | 139 | 121 | 150 | 141 | 146 | 149 |
| 3 | 913 | 74 | 69 | 74 | 93 | 100 | 92 | 94 | 90 | 114 | 113 |
| 4 | 789 | 93 | 82 | 91 | 92 | 80 | 75 | 75 | 63 | 75 | 63 |
| 5 | 1,104 | 90 | 70 | 105 | 108 | 108 | 114 | 139 | 128 | 148 | 94 |
| 6 | 272 | 38 | 33 | 35 | 28 | 25 | 22 | 23 | 24 | 27 | 17 |
| 7 | 205 | 18 | 18 | 10 | 21 | 13 | 12 | 25 | 33 | 31 | 24 |
| 8 | 129 | 4 | 10 | 9 | 19 | 7 | 13 | 10 | 21 | 15 | 21 |
| 9 | 540 | 35 | 32 | 33 | 38 | 38 | 54 | 74 | 70 | 83 | 83 |
| 10 | 568 | 60 | 66 | 59 | 76 | 65 | 44 | 42 | 59 | 60 | 37 |
| 11 | 143 | 7 | 8 | 10 | 14 | 16 | 11 | 16 | 25 | 14 | 22 |
| 12 | 103 | 9 | 17 | 10 | 12 | 6 | 12 | 7 | 12 | 14 | 4 |
| | | | | | | | | | | | |
| **Total (n)** | **6,922** | **615** | **584** | **661** | **719** | **672** | **636** | **727** | **760** | **830** | **718** |

Because there was no evidence of inconsistent reporting effort between years or between Caltrans districts, a regression analysis was conducted to investigate potential increases or decreases in the total number of reported deer-vehicle crashes in the state of California in the period 2005 through 2014 (Figure 6). The regression analysis showed that the slope significantly deviated from zero ($p=0.007$); the number of reported deer-vehicle crashes increased significantly in this period (Figure 6). On average, the increase in the number of reported deer-vehicle crashes was 18.98 per year.

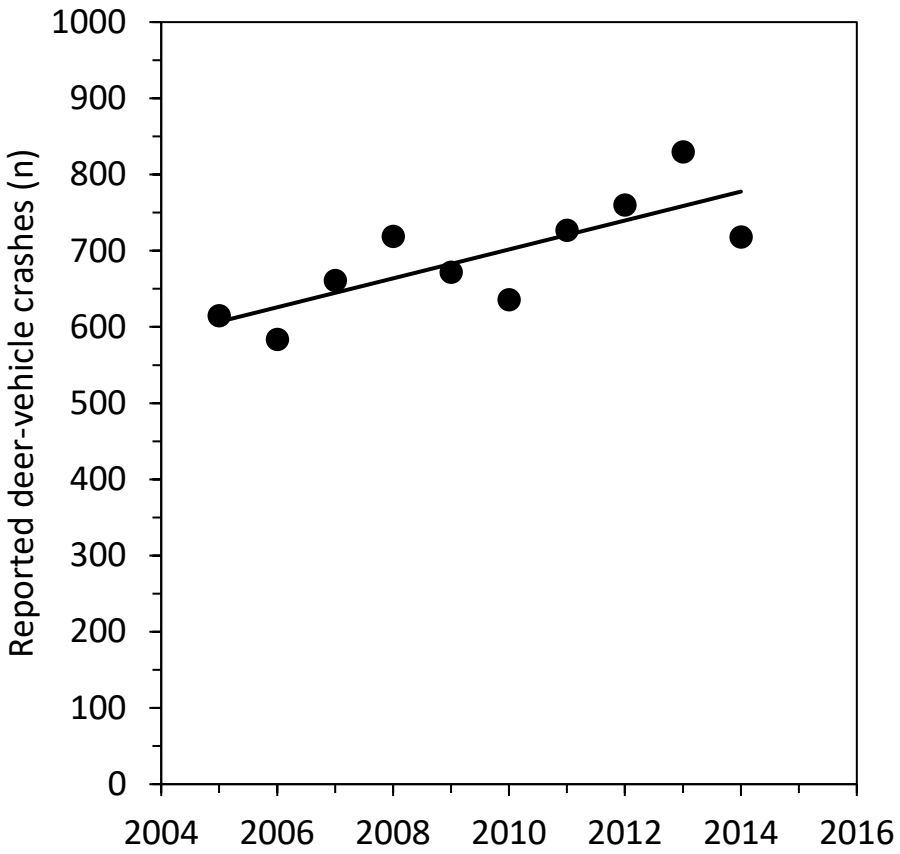



**Figure 6: Number of reported deer-vehicle crashes per year in the state of California.**
**Formula for the trend line: Crash = -37451.76 + (18.98 × Year); R2=0.614, p=0.007, slope 18.98).**

## 3.4. Large Mammal Carcass Removal Data

The carcass removal data related to the period 1 January 2000 through 31 December 2009 (the most recent 10 years data were available for). The carcass removal data used for this project were based on the following data sources and periods:

- "AVC" data:1 January 2000 through 31 December 2005.
- "IMMS" data: 1 January 2006 through 31 December 2009.

The researchers edited the database so that each individual carcass corresponds to a record in the database (rather than one record relating to multiple carcasses). In addition, the researchers made the species descriptions as consistent and precise as possible. Most of the reported carcasses (66.8%) related to mule deer (Table 7). However, mule deer represented 97.8% of all large mammal carcasses of species larger in size than a coyote (Table 7). Other large mammals included black bear, elk, mountain lion, wild boar, bighorn sheep, and pronghorn (all <1%) (Table 7).

Large mammal species of possible conservation concern to Caltrans include elk, mountain lion, and bighorn sheep (Pers. comm. Jim Henke, Caltrans). However, given the low numbers in the

carcass removal database for these species, hot spot analyses for these individual species are unlikely to accurately identify road sections where these species are hit most frequently. Based on the species descriptions by road maintenance personnel that recorded the carcasses, it is not certain that there were any federal or state threatened or endangered species reported. However, some of the species descriptions did not identify carcasses to the species level (e.g. “Fox”), or subspecies level (e.g. “Bighorn sheep” or “Kit fox”) and it is still possible that threatened or endangered species or subspecies were encountered and removed by road maintenance personnel (e.g. Peninsular bighorn sheep (*Ovis canadensis nelsoni*), Sierra Nevada bighorn sheep (*Ovis canadensis sierra*), Sierra Nevada red fox (*Vulpes vulpes necator*), or San Joaquin kit fox (*Vulpes macrotis mutica*). However, most of the threatened and endangered mammal species in California are too small to have been detected by road maintenance personnel from a moving vehicle (Teixeira et al., 2013).

**Table 7: Species and number of reported carcasses in California (2000-2009).**

| Species description | Total | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | |
| Mule deer (*Odocoileus hemionus*) | 3,424 | 357 | 123 | 833 | 487 | 462 | 142 | 155 | 287 | 321 | 257 |
| Unknown | 743 | 0 | 0 | 7 | 0 | 0 | 0 | 201 | 207 | 176 | 152 |
| Raccoon (*Procyon lotor*) | 315 | 24 | 5 | 13 | 17 | 18 | 9 | 14 | 37 | 104 | 74 |
| Coyote (*Canis latrans*) | 211 | 28 | 2 | 25 | 29 | 29 | 12 | 6 | 11 | 18 | 51 |
| Virginia opossum (*Didelphis virginiana*) | 99 | 14 | 2 | 17 | 16 | 8 | 14 | 3 | 6 | 13 | 6 |
| Skunk sp. | 88 | 10 | 0 | 4 | 5 | 3 | 8 | 6 | 16 | 21 | 15 |
| Bird | 65 | 8 | 1 | 7 | 3 | 8 | 34 | 0 | 3 | 1 | |
| Black bear (*Ursus americanus*) | 50 | 0 | 0 | 20 | 0 | 7 | 0 | 2 | 13 | 5 | 3 |
| Fox sp. | 22 | 6 | 0 | 0 | 2 | 1 | 0 | 1 | 6 | 4 | 2 |
| Rabbit sp. | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 9 | 8 | 2 |
| Bobcat (*Lynx rufus*) | 20 | 5 | 0 | 2 | 5 | 2 | 1 | 0 | 1 | 1 | 3 |
| Rabbit or hare sp. | 18 | 6 | 0 | 3 | 2 | 2 | 5 | 0 | 0 | 0 | 0 |
| Elk (*Cervus canadensis*) | 17 | 0 | 0 | 2 | 1 | 5 | 0 | 0 | 3 | 4 | 2 |
| Squirrel sp. | 5 | 1 | 0 | 1 | 0 | 0 | 2 | 0 | 0 | 1 | 0 |
| Gray fox (*Urocyon cinereoargenteus*) | 4 | 2 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| Mammal sp. | 4 | 0 | 0 | 0 | 1 | 2 | 1 | 0 | 0 | 0 | 0 |
| Mountain lion (*Puma concolor*) | 4 | 0 | 1 | 2 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| American badger (*Taxidea taxus*) | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 |
| Red fox (*Vulpes vulpes*) | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 1 |
| Wild boar (*Sus scrofa*) | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 |
| Jack rabbit (*Lepus* sp.) | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| Bighorn sheep (*Ovis canadensis*) | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 |
| Kit fox (*Vulpes macrotis*) | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| River otter (*Lontra canadensis*) | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| Pronghorn (*Antilocapra americana*) | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | | | | | | | | | | | |
| Total (n) | 5,125 | 462 | 135 | 937 | 568 | 547 | 228 | 390 | 602 | 682 | 574 |

For the following sections and chapters of this report that are based on carcass removal data, we selected mule deer carcass removal data only. Mule deer carcasses were more numerous from May through November compared to December through April, with the highest numbers occurring in September through November, and in May (Figure 7).

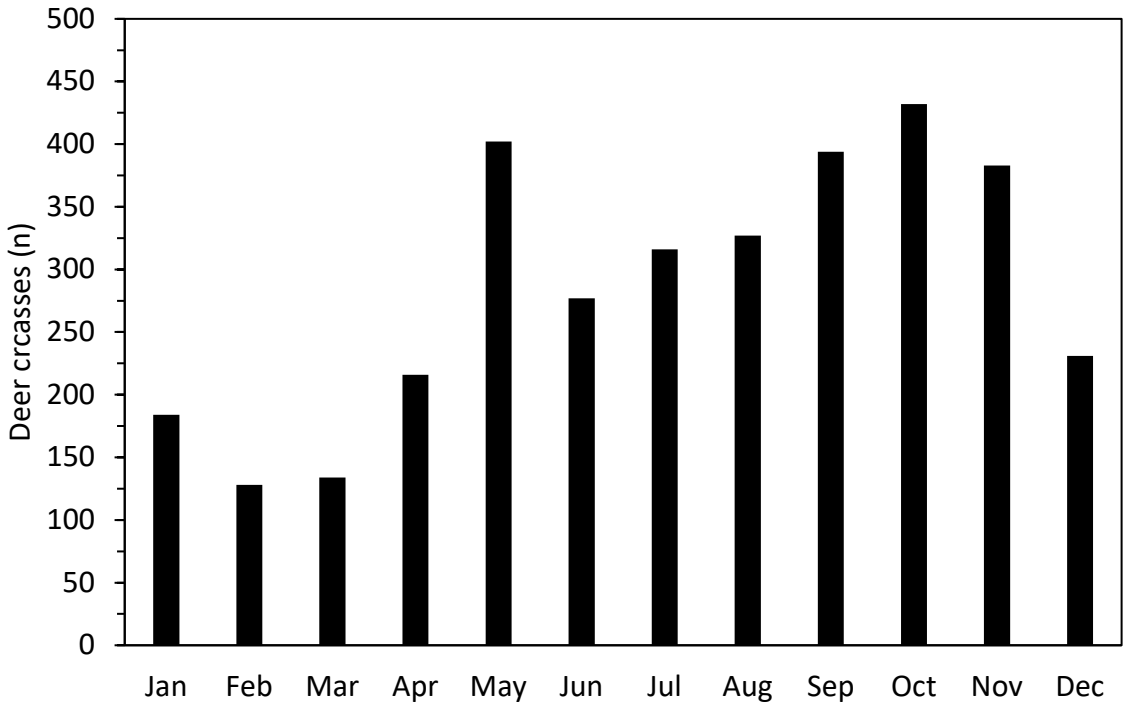



**Figure 7: Distribution of reported mule deer carcasses per month in California over a ten-year period (2000 through 2009).**

Mule deer carcasses were not reported in some years in some of the Caltrans districts (Table 8). For Districts 1 through 8, reporting was mostly restricted to 2006-2009. For Districts 9 and 12, the reporting was mostly restricted to 2000-2005. District 10 reported consistently throughout the data collection period, and District 11 reported very few observations with no reports in most of the years (Table 8). The data illustrate that the search and reporting effort for mule deer carcasses was inconsistent between years in all but one of the districts. Some districts even had no reported mule deer carcasses at all in some years.

Because of the temporal and spatial inconsistencies in the carcass data, trend analyses for the number of carcasses reported per year and statewide hot spot analyses are not meaningful for the 10-year dataset, nor for a selection out of these 10 years. The hot spot analyses within each district are still meaningful though, assuming that the search and reporting effort only varied between years, but not spatially within each district. However, it is prudent to set a minimum sample size for each district. For the purposes of this report, the minimum sample size (total number of mule deer carcasses over 10 years) was set at 50 records. This means that mule deer carcass hot spot analyses were conducted for Districts 1, 2, 4, 6, 9, 10, and 12, and not for Districts 3, 5, 7, 8, and 11 (Table 8). The authors of this report suggest improving efforts by Caltrans personnel to more consistently report mule deer carcasses with similar search and reporting effort between years as well as between districts.

**Table 8: The number of reported mule deer carcasses per Caltrans district per year.**

| District | Total (n) | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | |
| 1 | 230 | 15 | 10 | 18 | 0 | 0 | 0 | 41 | 71 | 37 | 38 |
| 2 | 202 | 0 | 0 | 175 | 0 | 0 | 0 | 0 | 3 | 14 | 10 |
| 3 | 9 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 3 | 1 | 4 |
| 4 | 367 | 0 | 0 | 0 | 0 | 0 | 0 | 40 | 83 | 135 | 109 |
| 5 | 32 | 0 | 0 | 0 | 0 | 0 | 0 | 11 | 12 | 6 | 3 |
| 6 | 58 | 0 | 0 | 2 | 1 | 0 | 0 | 4 | 14 | 22 | 15 |
| 7 | 14 | 0 | 0 | 0 | 0 | 0 | 0 | 6 | 1 | 3 | 4 |
| 8 | 5 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 0 | 1 |
| 9 | 670 | 95 | 35 | 140 | 127 | 157 | 115 | 0 | 1 | 0 | 0 |
| 10 | 1,746 | 222 | 73 | 487 | 347 | 290 | 13 | 48 | 95 | 99 | 72 |
| 11 | 3 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |
| 12 | 88 | 24 | 5 | 11 | 12 | 15 | 14 | 2 | 1 | 3 | 1 |
| | | | | | | | | | | | |
| Total (n) | 3,424 | 357 | 123 | 833 | 487 | 462 | 142 | 155 | 287 | 321 | 257 |

Wildlife-vehicle crash data typically represent only a fraction (14-50%) of the wildlife carcass data, even if both data sets relate to large mammals only (Tardif and Associates Inc., 2003; Riley & Marcoux, 2006; Donaldson & Lafon, 2008). Because of the suspected underreporting of mule deer carcasses in many of the Caltrans districts (see Table 8), the researchers compared the deer-vehicle crash number and the mule deer carcass number for each of the 12 Caltrans districts (Table 9). Note that both the crash (2005-2014) and carcass data (2000-2009) related to 10 years, but that only a portion of the years overlapped (2005-2009). Only one of the districts was within the expected range (14-50%); all other districts had more deer-vehicle crash records than mule deer carcasses, the opposite of what is considered normal, and far outside the expected range. This is further evidence of severe underreporting of mule deer carcasses in general, and in 11 out of the 12 Caltrans districts.

**Table 9: The percentage of deer-vehicle crashes compared to mule deer carcasses per Caltrans district.**

| District | Deer-vehicle crashes (n) 2005-2014 | Mule deer carcasses (n) 2000-2009 | % of crash data compared to carcass data | In or out of expected range |
|---|---|---|---|---|
| 1 | 790 | 230 | 343.48 | Out |
| 2 | 1,366 | 202 | 676.24 | Out |
| 3 | 913 | 9 | 10,144.44 | Out |
| 4 | 789 | 367 | 214.99 | Out |
| 5 | 1,104 | 32 | 3,450.00 | Out |
| 6 | 272 | 58 | 468.97 | Out |
| 7 | 205 | 14 | 1,464.29 | Out |
| 8 | 129 | 5 | 2,580.00 | Out |
| 9 | 540 | 670 | 80.60 | Out |
| 10 | 568 | 1,746 | 32.53 | In |
| 11 | 143 | 3 | 4,766.67 | Out |
| 12 | 103 | 88 | 117.05 | Out |
| Total | 6,922 | 3,424 | 202.16 | Out |

## 3.5. Discussion

The probability of human injuries as a result of a crash with a deer was 12.22% (847 out of 6,922 crashes). This was somewhat higher than the range reported in a review by Huijser et al. (2009): range 2.8-9.7%. The probability of human fatalities as a result of a crash with a deer was 0.19% (13 out of 6,922 crashes). This was within the range reported in a review by Huijser et al. (2009): range 0.009-0.05%. Motorcyclists were particularly vulnerable to human injuries or human fatalities as a result of a collision with a deer; 91.13% compared to under 10% for other types of motor vehicles. This is also consistent with other studies (e.g. Abra et al., 2019)

Deer-vehicle collisions (both deer crash and mule deer carcass data) were more numerous from May through November compared to December through April, with the highest numbers occurring in October and November. These deer crashes occur mostly at night, especially around dusk (5-10 pm) and dawn (5-7 am). Finally, the number of reported deer-vehicle crashes increased significantly in the study period. Note that the estimated deer population in California decreased rather than increased over this time period (CDFW, 2018). These seasonal, day-night, and trend patterns are similar to other studies (e.g. Huijser et al., 2008).

There was no evidence of inconsistent reporting effort between years or between Caltrans districts for the deer-vehicle crash data collected by the California Highway Patrol (CHP). However, there was evidence of substantial underreporting of mule deer carcasses compared to deer-vehicle crash data in all Caltrans districts except District 10.

# 4. IDENTIFY CRASH AND CARCASS HOT SPOTS

## 4.1. Introduction

This chapter contains the procedures used to identify large mammal-vehicle collision hot spots. The hot spot identification process results in hot spots that are primarily based on human safety data. This is important to recognize, as an alternative process that would identify hot spots based on – for example – biological conservation parameters, may result in the identification of very different road segments with different road lengths because it would probably be based on different species and habitat. This is not necessarily a problem, but it is important to recognize that the "departure point" for the identification process for the hot spots is based on human safety concerns and collisions with large wild mammals rather than anything else.

Based on the data exploration in Chapter 3, the authors of this report conducted the following types of hot spot analyses:

- Statewide hot spot analysis for regions with significant concentrations of deer-vehicle crashes. This analysis identifies regions in the state of California where deer-vehicle crashes occur significantly more than expected compared to a theoretical random spatial distribution of deer-vehicle crashes. Note that a statewide analysis for mule deer carcass data could not be conducted because of inconsistent search and reporting effort (see Chapter 3).
- Descriptive statewide hot spot analysis based on deer-vehicle crash data. This analysis identifies the road sections that have the highest concentration of deer-vehicle crashes in the state of California.
- Descriptive hot spot analyses within each Caltrans district based on deer-vehicle crash data. These analyses identify the road sections that have the highest concentration of deer-vehicle crashes within each Caltrans district.
- Descriptive hot spot analyses within each Caltrans district based on mule deer carcass removal data (i.e. for the Districts 1, 2, 4, 6, 9, 10, and 12, but not for Districts 3, 5, 7, 8, and 11 as these districts had insufficient data; See Chapter 3). These analyses identify the road sections that have the highest concentration of mule deer carcasses within each Caltrans district.
- Maps (no formal hot spot analyses) showing the locations of the reported collisions with black bear, elk, mountain lion, wild boar, bighorn sheep, and pronghorn.

## 4.2. Methods

*Integrating Data into a Spatial Database*

The deer crash and large wild mammal carcass locations were integrated into a spatial database (ArcGIS 10.6.1). In the state of California, different counties may have the same 0.1 postmile numbers for the different highway segments in their respective counties. The authors of this report generated unique 0.1-postmile descriptions based on the Caltrans district, the county, the

highway number, and the 0.1 postmile. For example, "10_MPA_49_123" means Caltrans District 10, Mariposa County, Hwy 49, postmile 12.3.

*Statewide Analysis for Significant Concentrations of Deer-Vehicle Crashes*

The authors of this report conducted a statewide optimal hot spot analysis (Getis-Ord Gi*) for deer-vehicle crashes in ArcGIS 10.6.1 (ESRI, 2018a). This analysis identifies statistically significant spatial clusters (hot spots) of deer crash locations. This analysis also identifies statistically significant areas with a no or low occurrence of deer crashes (cold spots). We selected all deer crash records along the highways that were part of this project. We then created a bounding polygon around the highways. This is the "analysis field" where observations are possible. This bounding polygon was a 500 m (1,640 ft) buffer from approximately the center of the highways resulting in a 1 km wide zone with the highways in the center. This allowed for some spatial imprecision in the original data.

We conducted analyses with 6,827 valid observations, and there were 106 locational outliers that were more than three times the standard deviation distance away from their closest non-coincident neighbor. The optimal grid size was 10,361 m (6.4 mile) (cells of 10,361 m x 10,361 m (6.4 x 6.4 mile)), and the optimal fixed distance band was 62,167 m (38.6 mile). Areas without highways that were part of this project did not have a grid cell and were not evaluated for significant concentrations of deer-vehicle crashes (hot spots), or for significant low concentration of deer-vehicle collisions (cold spots). The authors distinguished three categories of hot spots and cold spots based on a confidence interval of 90%, 95%, and 99%.

*Descriptive Hot Spot Analyses*

These analyses identify the road sections that have the "highest" concentration of deer-vehicle crashes and mule deer carcasses. The authors conducted three different Kernel density analyses for point features using ArcGIS 10.6.1 (ESRI, 2018b): one statewide analysis for deer-vehicle crashes and two analyses for each Caltrans district (one for deer-vehicle crash data and one for mule deer carcasses).

The statewide analysis included all deer-vehicle crash data from all highways in the state of California considered part of this project (15,090 miles (24,285 km); see Table 1). This statewide analysis can, at least in theory, result in hot spots that are all located in one district, and along one road section, with no hot spots at all in other districts or along other roads. The statewide analysis identifies the road sections with the "highest concentration" of deer-vehicle crashes in the state of California, regardless of the boundaries of the Caltrans districts.

The analyses per district only included either the deer-vehicle crash data or the mule deer carcass data for the district concerned. The analyses per district identify the road sections with the "highest concentration" of deer-vehicle crashes or mule deer carcasses within each district, regardless of the data for other Caltrans districts. Note that because of minimum sample size requirements, the analyses for mule deer carcasses were only conducted in Caltrans Districts 1, 2, 4, 6, 9, 10, and 12 (see Chapter 3). The analyses per district can result in a situation where the

number of deer-vehicle crashes or mule deer carcasses in the "worst" hot spots in one district would not necessarily be sufficient to be identified as hot spots in other districts.
For the Kernel density analyses, the researchers divided the study area (either the whole state or an individual Caltrans district) into a grid with a cell size of 25 x 25 m (82 x 82 ft). A 25 m (82 ft) cell size is relatively fine scale and accommodates for some spatial inaccuracies in GPS coordinates of the crash data. The Kernel density analysis calculates the density of deer-vehicle crashes or mule deer carcasses in a neighborhood around each cell based on the quartic kernel function described by Silverman (1986). The locations of the deer-vehicle crashes and mule deer carcasses are considered points and the Kernel density analysis calculates the density of crashes or carcasses in a neighborhood around each cell. Points that are close are weighted more than points that are farther away. Consistent with Gomes et al. (2009) we set the search radius at 500 m (1,640 ft). On a straight road this basically means that crashes or carcasses that are up to 500 m (1,640 ft) away are included in the density analyses for each cell. For the Kernel density, the researchers calculated the area covered within five Kernel isopleths, each with their own color code for displaying on the heatmaps (Table 10).

The researchers considered road sections with no crashes or carcasses, and road sections that fell into the two lowest density categories (50-100%; Table 10) to be "background". For the statewide analysis for deer-vehicle crash data, the road sections that had the highest densities ("top 50%") were considered a "hot spot" (i.e. yellow, orange or red; Table 10). If two hot spots were less than two miles apart, they were treated as one hot spot. For the analyses per Caltrans district (both for deer-vehicle crash data and mule deer carcasses), a similar threshold was applied. However, if the number of "red" or "orange" hot spots reached five or more within a district, no further "yellow" hot spots were identified in that district. Similarly, if the road length covered by the hot spots within a district reached 10 miles or more, no further "yellow" hot spots were identified.

The researchers described the individual hot spots based on the Kernel density category, the length of the hot spots, the number of lanes (based on satellite images), whether potential existing structures are present that may also serve as a wildlife crossing after potential modifications (based on satellite images), and the traffic volume (Annual Average Daily Traffic (AADT; Caltrans, 2019).

*Maps of the Reported Carcasses for Selected Other Species*

The authors of this report plotted the locations showing the locations of the reported carcasses of black bear, elk, mountain lion, wild boar, bighorn sheep, and pronghorn. Because of the small sample sizes for these species, no formal hot spot analyses were conducted. The low number of carcass removal data for these species illustrate that when it comes to specific species that are relatively rare (even if they are large), that their carcasses may be removed by others, legally or illegally, before the road maintenance crews come by. This suggests that for these relatively rare species other data sources may need to be consulted (e.g. data from natural resource management agencies, community science (or citizen science) data etc.). These other data may include observations of road-killed animals, observations of live animals seen on or near the road, or existing or potential habitat near transportation corridors.

**Table 10: The categories used for maps with the hot spots based on the crash and carcass data.**

| Percentile categories | Color on maps | Description |
|---|---|---|
| 75-100% | Green | The 25% of the cells with the lowest density (provided that the density is greater than 0) |
| 50-74.9% | Light green | The next 25% of the cells with the lowest density (provided that the density is greater than 0) |
| 25-49.9% | Yellow | The next 25% of the cells with the lowest density (provided that the density is greater than 0) |
| 5-24.9% | Orange | The next 20% of the cells with the lowest density (provided that the density is greater than 0) |
| <5% | Red | The 5% of cells with the highest density (provided that the density is greater than 0) |

## 4.3. Results

*Statewide Analysis for Significant Concentrations of Deer-Vehicle Crashes*

Regions with a statistically significant high concentration of deer-vehicle crashes (hot spots) include the areas around (Figure 8):

- Yreka/Mt Shasta.
- The coastal areas between Eureka and Fort Bragg.
- The foothills and Sierra Nevada north and south-east of Sacramento.
- The eastern slopes of the Sierra Nevada and desert around Susanville.
- The western slopes of the Sierra Nevada near Merced.
- The eastern slopes of the Sierra Nevada near Mono Lake and Mammoth Lakes.
- The coastal areas between San Francisco until just south of Carmel-by-the-Sea.
- The coastal areas near San Simeon until Santa Barbara.

Regions with a statistically significant low concentration of deer-vehicle crashes (cold spots) include the areas around (Figure 8):

- The southern portion of the Central Valley around Modesto until south of Bakersfield.
- The deserts north and east of Los Angeles and San Diego.

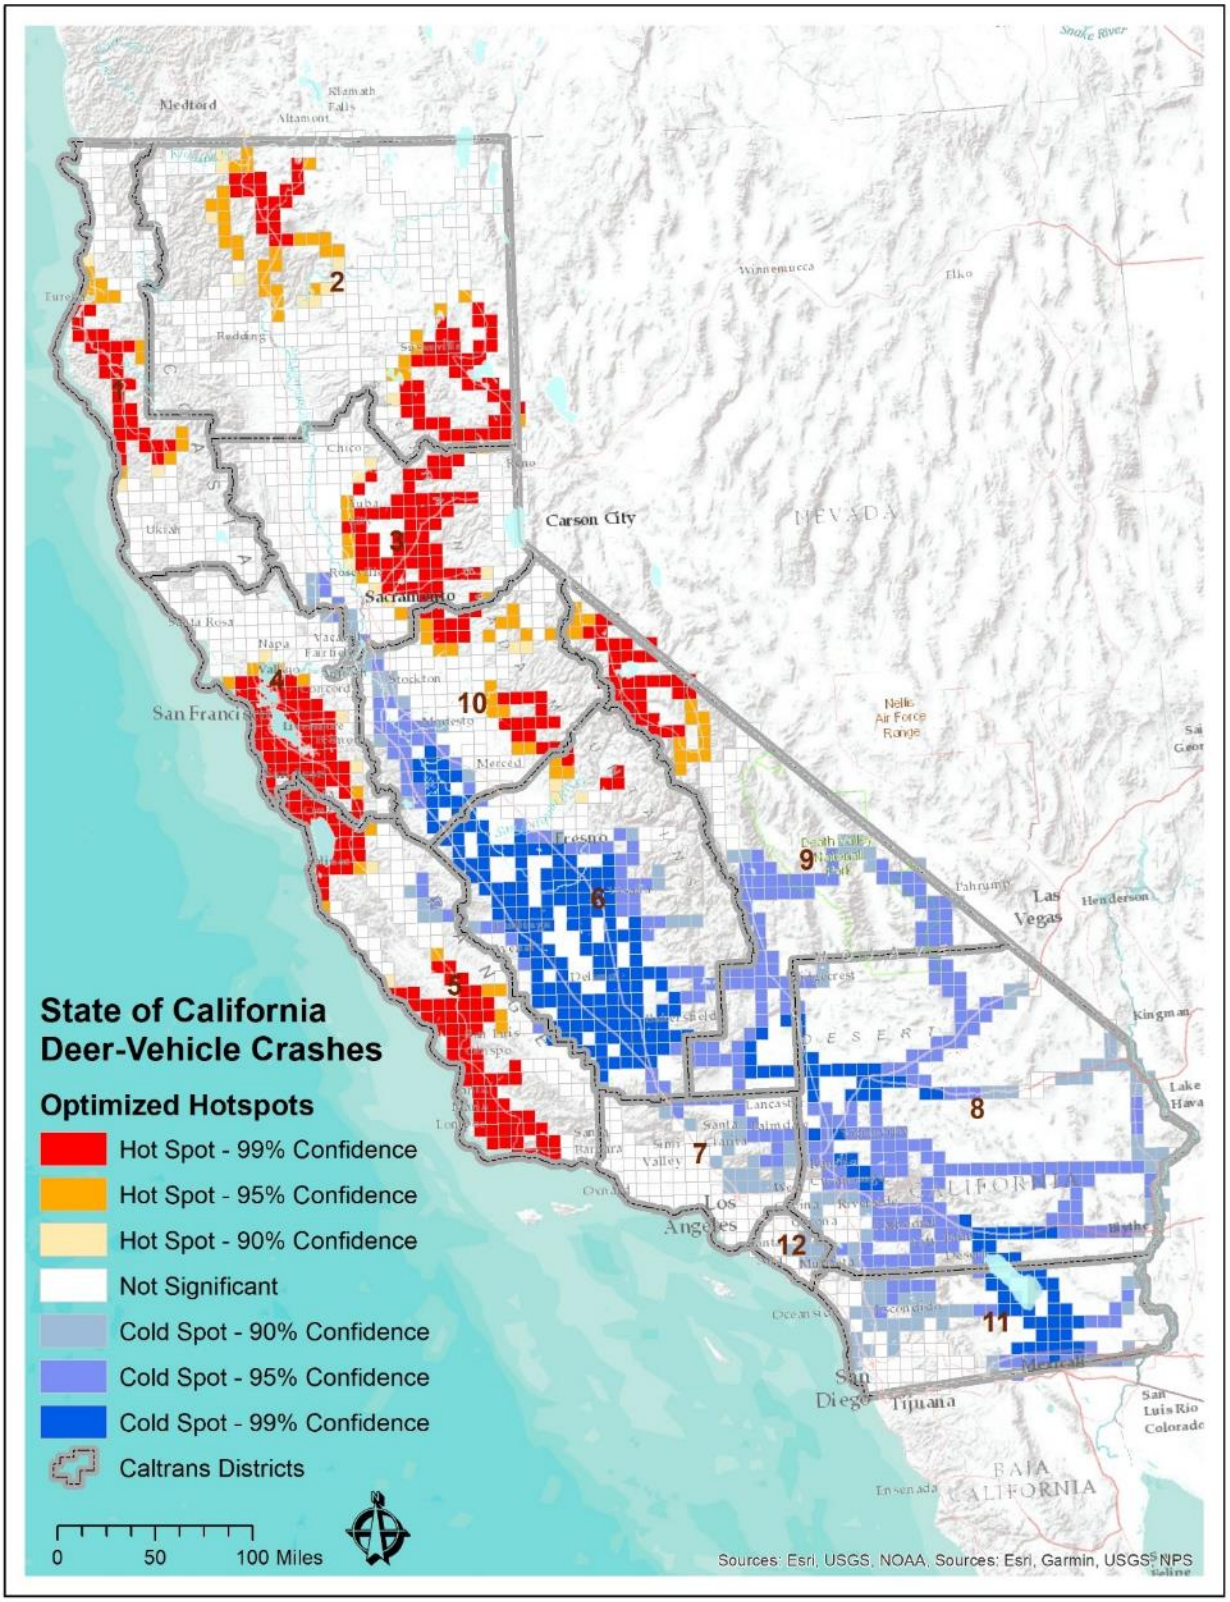



**Figure 8: Significant hot spots (red) and cold spots (blue) based on a statewide analysis of deer-vehicle crashes.**

*Descriptive Hot Spot Analyses*

For the statewide descriptive hot spot analysis, there were 13 hot spots that were at least "yellow" (i.e. the top 50% of densest cells representing the highest concentration of deer-vehicle crashes in the state of California, regardless of the boundaries of the Caltrans districts (Figure 9, Table 11, Appendix A).

The hot spots based on per district analyses for deer-vehicle crashes and mule deer carcasses analyses are shown in Figures 10-11. The hot spots based on per district analyses for deer-vehicle crashes are further characterized in Table 12 and detailed maps (per district and for each individual hot spot) are included in Appendix B. The hot spots based on per district analyses for mule deer carcasses are further characterized in Table 13 and detailed maps (per district and for each individual hot spot) are included in Appendix C.

A comparison of the deer-vehicle crash data and mule deer carcass data for each district showed the following:

**District 1:** While "deer'-vehicle crash data are reported throughout the district, mule deer carcass data are missing from the area north of Eureka. There is no overlap between the hot spots identified through the two data sets. Based on the apparent underreporting of mule deer carcasses, especially north of Eureka, hot spots based on deer-vehicle crash data seem more reliable than those identified based on mule deer carcass data.

**District 2:** While "deer'-vehicle crash data are reported throughout the district, mule deer carcass data are missing from the areas in the east and south-east portions of the district (e.g. around Susanville) and in the southern areas of the district (e.g. around Red Bluff). However, there is some overlap between the hot spots identified through the two data sets; most notably on I-5, just south of Yreka.

**District 3:** Only "deer'-vehicle crash data were considered for a hot spot analysis for this district. The mule deer carcass removal data were deemed insufficient. Most of the deer-vehicle crashes were reported from the foothills of the Sierra Nevada, especially around Grass Valley and Placerville.

**District 4:** Both "deer'-vehicle crash data and mule deer carcass data are reported throughout the district. Both data sources identify sections of I-280 and Hwy 92 around and between Highlands-Baywood Park and Cupertino as hot spots. Mule deer carcasses are also reported in relatively high numbers between Berkeley and Fremont along sections of I-680, Hwy 13, Hwy 24, and I-580.

**District 5:** Only "deer'-vehicle crash data were considered for a hot spot analysis for this district. The mule deer carcass removal data were deemed insufficient. There was one hot spot identified: US Hwy 101 south of Templeton.

**District 6:** Both "deer'-vehicle crash data and mule deer carcass data are reported from the western foothills of the Sierra Nevada. Both data sources identify road sections along Hwy 41

near Oakhurst as a hot spot. The carcass data also show a hot spot along Hwy 198 near Three Rivers.

**District 7:** Only "deer'-vehicle crash data were considered for a hot spot analysis for this district. The mule deer carcass removal data were deemed insufficient. The most severe hot spots were along Hwy 134 and Hwy 2 near Glendale, with additional hot spots near Sherman Oaks (I-405), Casitas Springs (Hwy 33), and Moorpark (Hwy 23).

**District 8:** Only "deer'-vehicle crash data were considered for a hot spot analysis for this district. The mule deer carcass removal data were deemed insufficient. The most severe hot spots were along Hwy 18, Hwy 138, Hwy 330 on the forested slopes just north of San Bernardino.

**District 9:** Both "deer'-vehicle crash data and mule deer carcass data are reported from the area near the border with Nevada and not or barely from the areas around Mojave. Both data sets identify sections of US Hwy 395 just west of Bridgeport and another section just east of Mammoth Lakes as hot spots. Other sections of US Hwy 395 were also identified as hot spots, but only by one of the two data sources at a time.

**District 10:** Both "deer'-vehicle crash data and mule deer carcass data are reported in relatively high numbers from the western foothills of the Sierra Nevada. Both data sets identify sections of Hwy 49 near Bootjack and between Mariposa and Bootjack as a hot spot. However, other hot spots in the foothills were identified by only one of the data sources. The carcass data showed long road sections near Pinegrove (Hwy 88), near Jackson (Hwy 49), east of Sonora and Jamestown (Hwy 108), west of Moccasin (Hwy 49), and east and west of Groveland (Hwy 120).

**District 11:** Only "deer'-vehicle crash data were considered for a hot spot analysis for this district. The mule deer carcass removal data were deemed insufficient. Most hot spots were along Hwy 79, especially near Warner Springs, Santa Ysabel, and south of Julian.

**District 12:** Both "deer'-vehicle crash data and mule deer carcass data are reported in relatively high numbers around San Joaquin Hills (Hwy 73), and the foothills of the Santa Ana Mountains (Hwy 241, Hwy 261, Hwy 74).

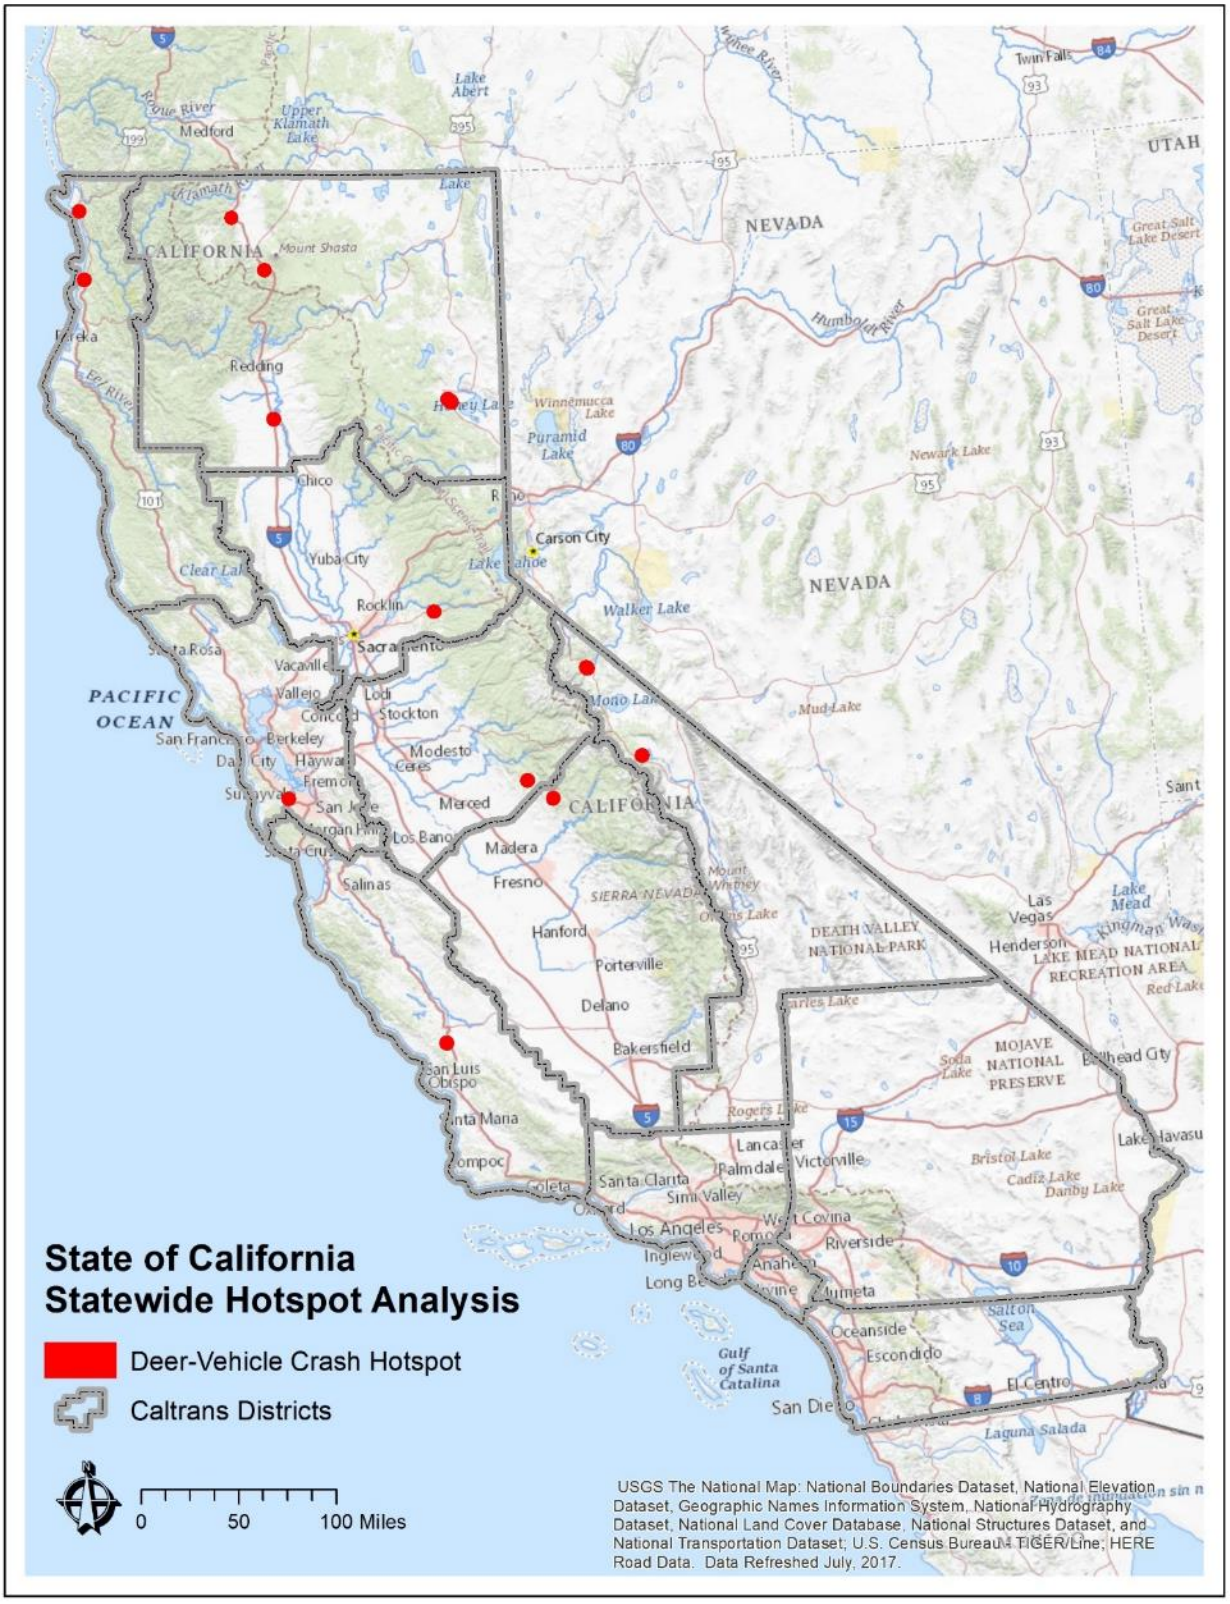



**Figure 9: The "worst" hot spots based on a statewide analysis for deer-vehicle crashes in the entire state of California.**

**Table 11: The "worst" hot spots based on a statewide analysis for deer-vehicle crashes in the entire state of California.**
**Note: AADT = Annual Average Daily Traffic.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 1 | Del Norte | Crescent City | US Hwy 101 | 1_DN_101_237 | 1_DN_101_235 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 4,450 |
| 2 | 1 | Humboldt | Orick | US Hwy 101 | 1_HUM_101_1148 | 1_HUM_101_1145 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 4,050 |
| 3 | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_447 | 2_SIS_5_446 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 4 | No | 19,000 |
| 4 | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_99 | 2_SIS_5_96 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 22,350 |
| 5 | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_275 | 2_TEH_5_272 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 38,500 |
| 6 | 2 | Lassen | Susanville | US Hwy 395 | 2_LAS_395_555 | 2_LAS_395_529 | yellow | 2.6 | 1.0 | 0.0 | 0.0 | 3 | Yes | 6,950 |
| 7 | 3 | El Dorado | Placerville | US Hwy 50 | 3_ED_50_221 | 3_ED_50_224 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 27,450 |
| 8 | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_153 | 4_SCL_280_151 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 8 | No | 131,500 |
| 9 | 5 | San Luis Obispo | Templeton | US Hwy 101 | 5_SLO_101_497 | 5_SLO_101_492 | red | 0.5 | 0.2 | 0.3 | 0.1 | 4 | Yes | 58,850 |
| 10 | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_352 | 6_MAD_41_348 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 3 | No | 16,500 |
| 11 | 9 | Mono | Bridgeport | US Hwy 395 | 9_MNO_395_819 | 9_MNO_395_809 | orange | 1.0 | 0.6 | 0.3 | 0.0 | 2 | No | 3,050 |
| 12 | 9 | Mono | Mammoth Lakes | US Hwy 395 | 9_MNO_395_201 | 9_MNO_395_195 | orange | 0.6 | 0.2 | 0.4 | 0.0 | 4 | No | 9,650 |
| 13 | 10 | Mariposa | Mariposa | Hwy 49 | 10_MPA_49_126 | 10_MPA_49_123 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 5,200 |

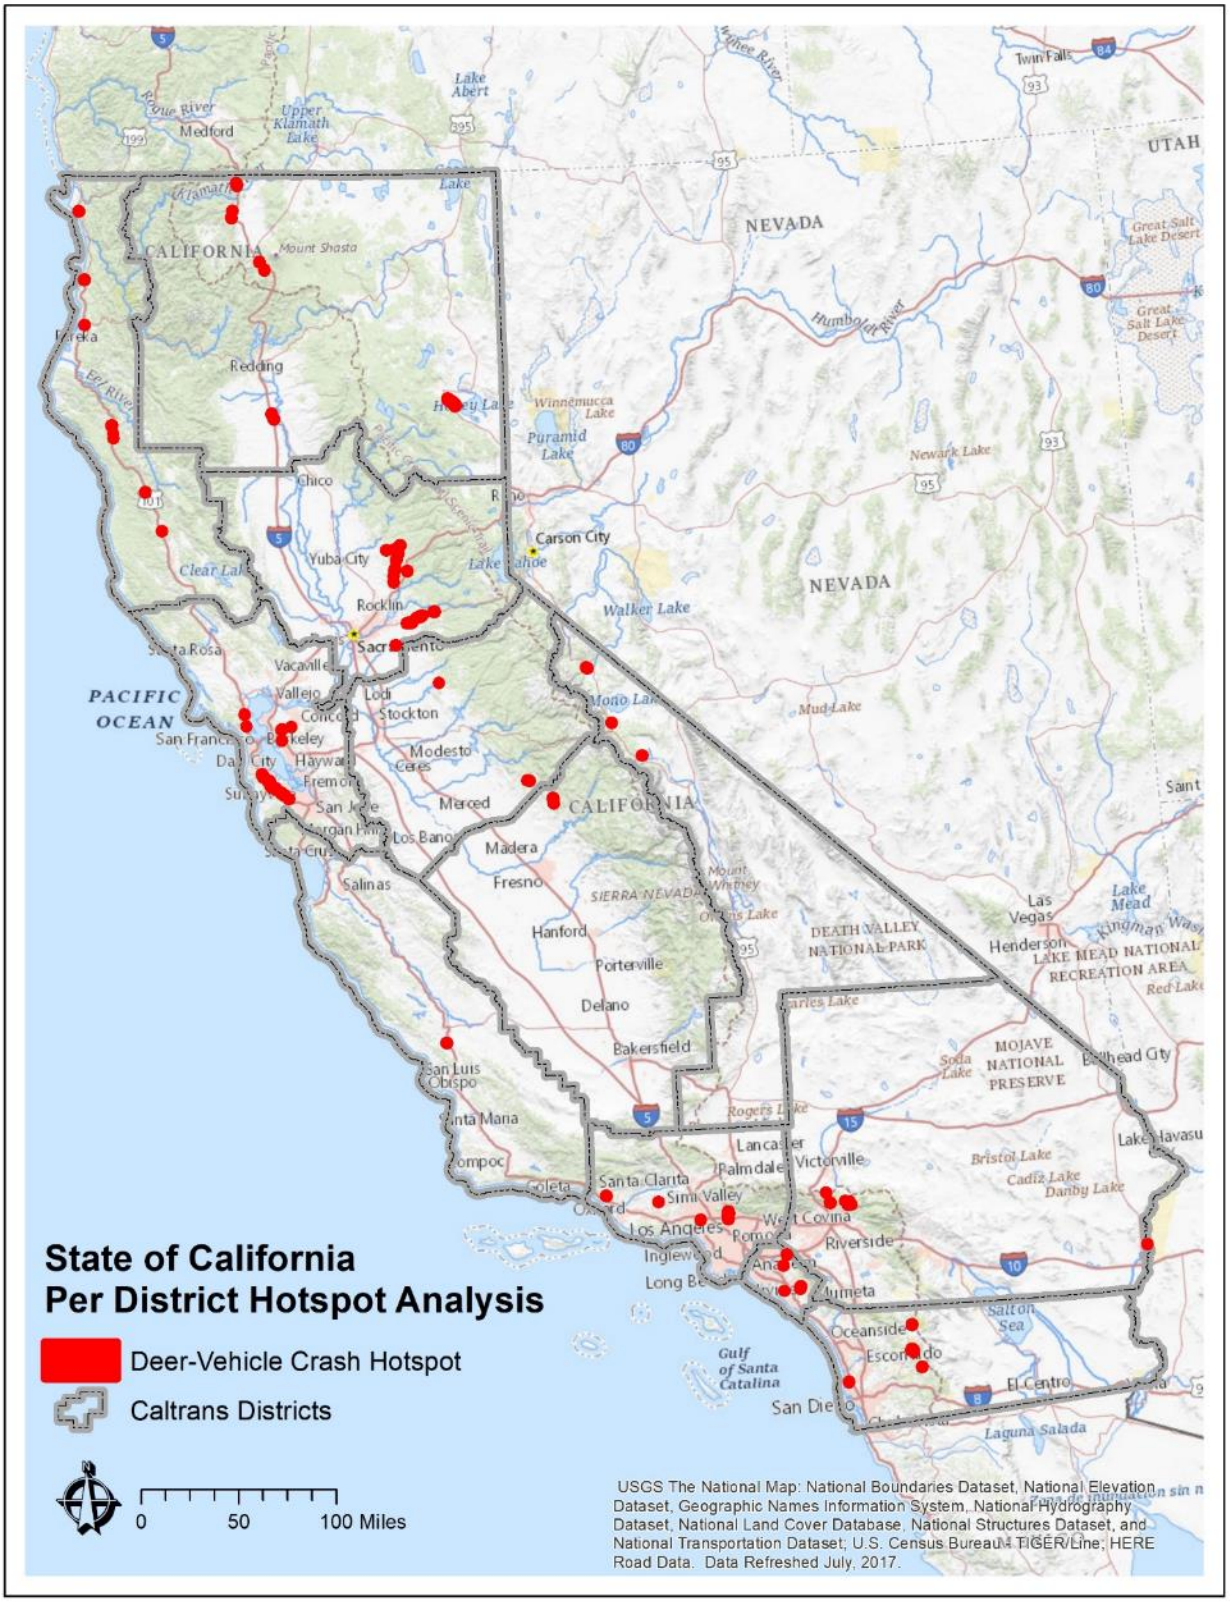



**Figure 10: The "worst" hot spots based on deer-vehicle crashes within each Caltrans district.**

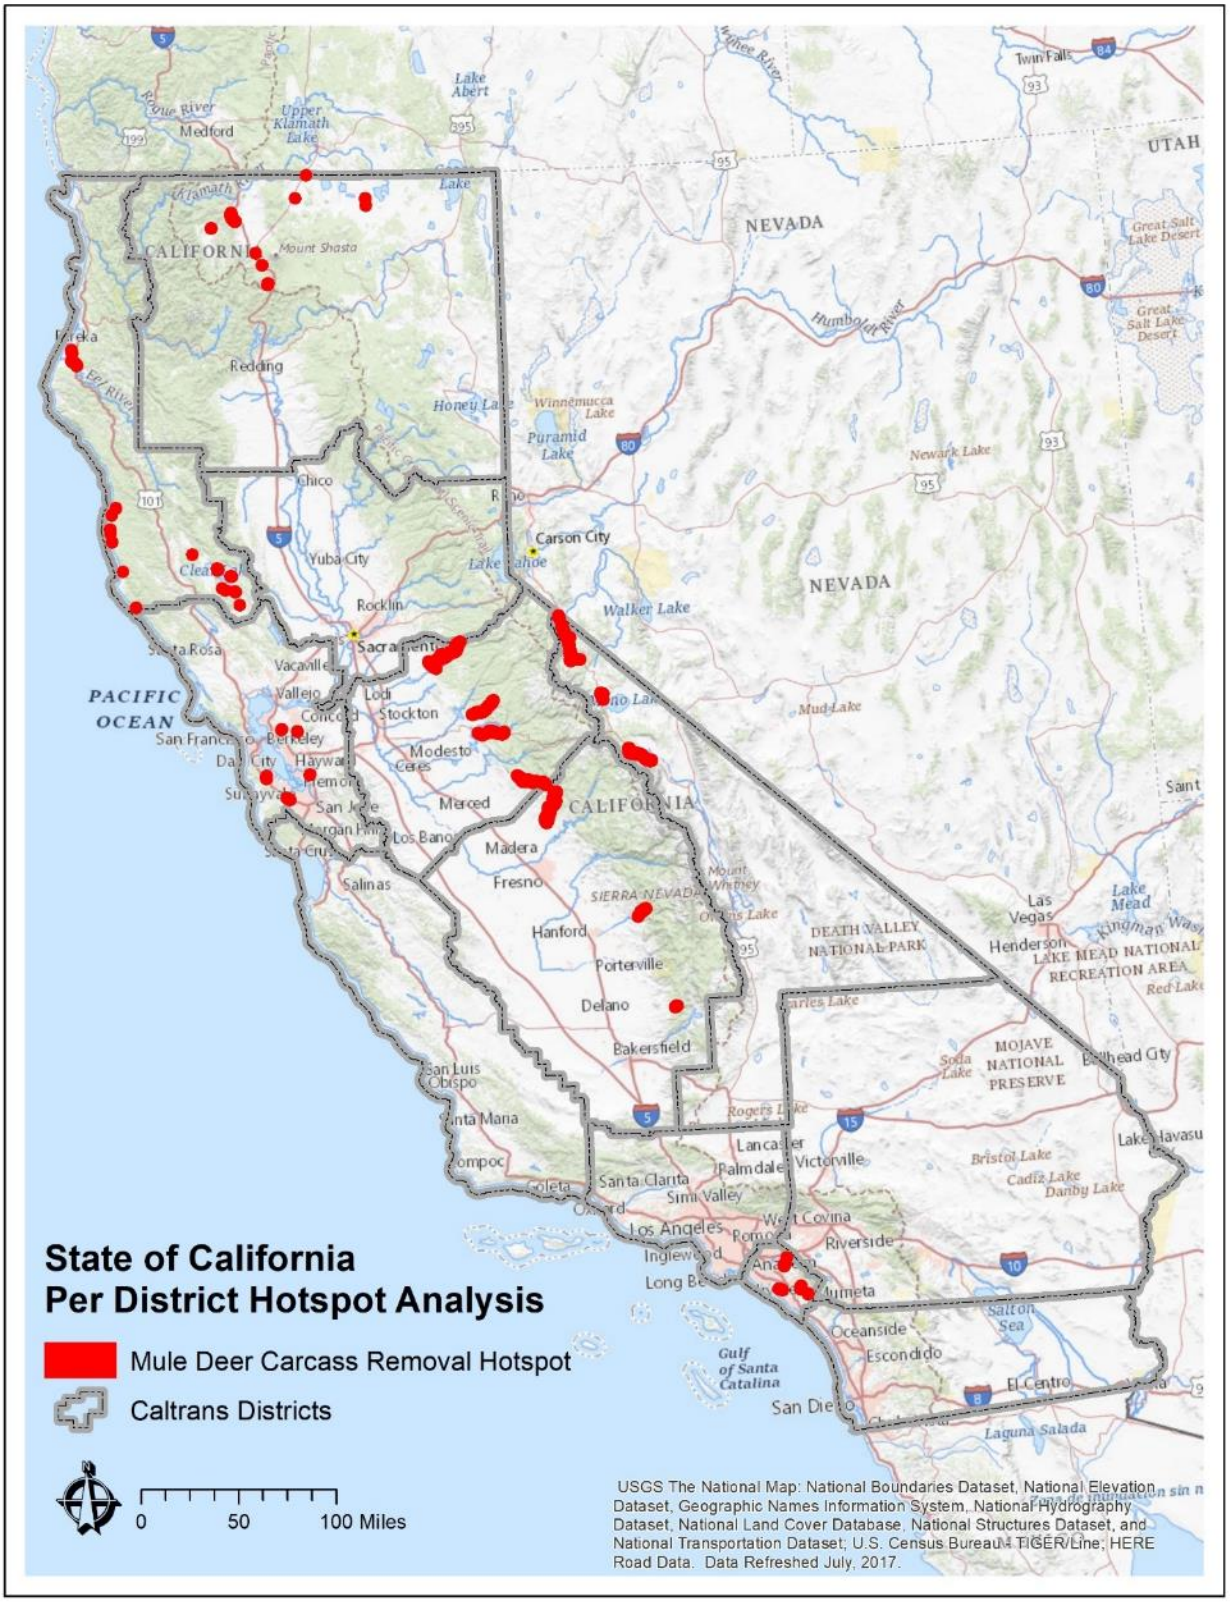



**Figure 11: The "worst" hot spots based on mule deer carcasses within each Caltrans district.**

**Table 12: The "worst" hot spots based on analyses for deer-vehicle crashes per Caltrans district.**
**Note: AADT = Annual Average Daily Traffic.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1a | 1 | Del Norte | Crescent City | US Hwy 101 | 1_DN_101_239 | 1_DN_101_233 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 2 | No | 4,450 |
| 1b | 1 | Humboldt | Orick | US Hwy 101 | 1_HUM_101_1150 | 1_HUM_101_1142 | red | 0.8 | 0.4 | 0.2 | 0.2 | 2 | Yes | 4,050 |
| 1c | 1 | Humboldt | Arcata | US Hwy 101 | 1_HUM_101_878 | 1_HUM_101_875 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 38,200 |
| 1d | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_147 | 1_HUM_101_143 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 8,100 |
| 1e | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_102 | 1_HUM_101_100 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 5 | No | 7,650 |
| 1f | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_70 | 1_HUM_101_69 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 4 | No | 6,850 |
| 1g | 1 | Mendocino | Laytonville | US Hwy 101 | 1_MEN_101_668 | 1_MEN_101_665 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 7,800 |
| 1h | 1 | Mendocino | Willits | US Hwy 101 | 1_MEN_101_426 | 1_MEN_101_424 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 4 | No | 21,000 |
| | | | | | | | | | | | | | | |
| 2a | 2 | Siskiyou | Hornbrook | I-5 | 2_SIS_5_651 | 2_SIS_5_636 | yellow | 2.5 | 0.8 | 0.0 | 0.0 | 4 | Yes | 16,200 |
| 2b | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_486 | 2_SIS_5_483 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | Yes | 16,550 |
| 2c | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_450 | 2_SIS_5_444 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 4 | No | 18,850 |
| 2d | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_100 | 2_SIS_5_95 | orange | 0.5 | 0.2 | 0.3 | 0.0 | 4 | No | 22,350 |
| 2e | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_319 | 2_TEH_5_314 | yellow | 0.5 | 0.5 | 0.0 | 0.0 | 5 | Yes | 42,750 |
| 2f | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_276 | 2_TEH_5_271 | yellow | 0.5 | 0.2 | 0.3 | 0.0 | 4 | No | 38,500 |
| 2g | 2 | Lassen | Susanville | US Hwy 395 | 2_LAS_395_557 | 2_LAS_395_501 | red | 5.6 | 2.3 | 0.8 | 0.2 | 3 | Yes | 6,950 |
| 2h | 2 | Siskiyou | Black Butte | I-5 | 2_SIS_5_149 | 2_SIS_5_145 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 24,800 |
| | | | | | | | | | | | | | | |
| 3a | 3 | El Dorado | Placerville | US Hwy 50 | 3_ED_50_229 | 3_ED_50_220 | red | 0.9 | 0.2 | 0.5 | 0.2 | 4 | No | 27,450 |
| 3b | 3 | El Dorado | Perks Corner | US Hwy 50 | 3_ED_50_152 | 3_ED_50_115 | orange | 3.7 | 1.4 | 0.2 | 0.0 | 4 | Yes | 10,600 |
| 3c | 3 | El Dorado | Shingle Springs | US Hwy 50 | 3_ED_50_88 | 3_ED_50_54 | yellow | 3.4 | 1.1 | 0.0 | 0.0 | 6 | No | 66,200 |
| 3d | 3 | Sacramento | Rancho Murieta | Hwy 16 | 3_SAC_16_197 | 3_SAC_16_194 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 11,250 |
| 3e | 3 | Nevada | Grass Valley | Hwy 49/20 | 3_NEV_20_150 | 3_NEV_20_135 | yellow | 0.5 | 0.5 | 0.0 | 0.0 | 6 | No | 21,800 |
| 3f | 3 | Nevada | Grass Valley | Hwy 20 | 3_NEV_20_115 | 3_NEV_20_111 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 3 | No | 21,300 |
| 3g | 3 | Nevada | Penn Valley | Hwy 20 | 3_NEV_20_70 | 3_NEV_20_66 | orange | 0.4 | 0.2 | 0.2 | 0.0 | 3 | No | 15,800 |
| 3h | 3 | Nevada | La Barr Meadows | Hwy 49 | 3_NEV_49_121 | 3_NEV_49_117 | orange | 0.4 | 0.2 | 0.2 | 0.0 | 3 | No | 24,500 |
| 3i | 3 | Nevada | Alta Sierra | Hwy 49 | 3_NEV_49_90 | 3_NEV_49_79 | orange | 1.1 | 0.5 | 0.2 | 0.0 | 3 | No | 23,550 |
| 3j | 3 | Nevada | Higgins Corner | Hwy 49 | 3_NEV_49_40 | 3_NEV_49_26 | orange | 1.4 | 0.7 | 0.3 | 0.0 | 2 | Yes | 23,200 |
| 3k | 3 | Placer | Overhill Dr | Hwy 49 | 3_PLA_49_113 | 3_PLA_49_110 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 30,700 |
| 3l | 3 | Placer | Elders Corner | Hwy 49 | 3_PLA_49_81 | 3_PLA_49_78 | orange | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 32,500 |
| 3m | 3 | Placer | Weimar | I-80 | 3_PLA_80_295 | 3_PLA_80_291 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 5 | Yes | 39,450 |
| | | | | | | | | | | | | | | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 4a | 4 | Marin | San Rafael | US Hwy 101 | 4_MRN_101_128 | 4_MRN_101_125 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 10 | No | 202,700 |
| 4b | 4 | Marin | Strawberry | US Hwy 101 | 4_MRN_101_59 | 4_MRN_101_56 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 10 | No | 152,800 |
| 4c | 4 | San Mateo | Highlands-Baywood Park | I-280 | 4_SM_280_144 | 4_SM_280_122 | yellow | 2.2 | 1.0 | 0.0 | 0.0 | 10 | Yes | 129,000 |
| 4d | 4 | San Mateo | Woodside | I-280 | 4_SM_280_95 | 4_SM_280_31 | orange | 6.4 | 1.7 | 0.3 | 0.0 | 8 | Yes | 114,000 |
| 4e | 4 | Santa Clara | Stanford | I-280 | 4_SM_280_2 | 4_SCL_280_182 | yellow | 2.6 | 0.6 | 0.0 | 0.0 | 8 | No | 121,000 |
| 4f | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_154 | 4_SCL_280_150 | red | 0.4 | 1.0 | 2.0 | 1.0 | 6 | No | 131,500 |
| 4g | 4 | Contra Costa | Condit | Hwy 24 | 4_CC_24_78 | 4_CC_24_76 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 8 | No | 209,500 |
| 4h | 4 | Contra Costa | Orinda | Hwy 24 | 4_CC_24_25 | 4_CC_24_21 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 8 | No | 188,000 |
| 4i | 4 | Alameda | Redwood Heights | Hwy 13 | 4_ALA_13_54 | 4_ALA_13_51 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 54,600 |
| | | | | | | | | | | | | | | |
| 5a | 5 | San Luis Obispo | Templeton | US Hwy 101 | 5_SLO_101_497 | 5_SLO_101_492 | red | 0.5 | 0.2 | 0.3 | 0.1 | 4 | Yes | 58,850 |
| | | | | | | | | | | | | | | |
| 6a | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_352 | 6_MAD_41_347 | red | 0.5 | 0.2 | 0.2 | 0.1 | 3 | No | 19,000 |
| 6b | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_317 | 6_MAD_41_314 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 19,000 |
| | | | | | | | | | | | | | | |
| 7a | 7 | Los Angeles | Glendale | Hwy 134 | 7_LA_134_94 | 7_LA_134_90 | red | 0.4 | 0.1 | 0.2 | 0.1 | 8 | No | 209,500 |
| 7b | 7 | Los Angeles | Glendale | Hwy 2 | 7_LA_2_228 | 7_LA_2_200 | orange | 2.8 | 0.7 | 0.1 | 0.0 | 9 | No | 124,500 |
| 7c | 7 | Los Angeles | Sherman Oaks | I-405 | 7_LA_405_387 | 7_LA_405_383 | orange | 0.4 | 0.3 | 0.1 | 0.0 | 12 | No | 253,500 |
| 7d | 7 | Ventura | Casitas Springs | Hwy 33 | 7_VEN_33_59 | 7_VEN_33_55 | orange | 0.4 | 0.3 | 0.1 | 0.0 | 3 | No | 26,500 |
| 7e | 7 | Ventura | Moorpark | Hwy 118 | 7_VEN_118_202 | 7_VEN_118_200 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 5 | No | 79,500 |
| | | | | | | | | | | | | | | |
| 8a | 8 | San Bernardino | Crestline | Hwy 18 | 8_SBD_18_162 | 8_SBD_18_151 | red | 1.1 | 0.3 | 0.6 | 0.2 | 4 | No | 16,550 |
| 8b | 8 | San Bernardino | Silverwood Lake | Hwy 138 | 8_SBD_138_249 | 8_SBD_138_247 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 2,925 |
| 8c | 8 | San Bernardino | Running Springs | Hwy 330 | 8_SBD_330_433 | 8_SBD_330_407 | orange | 2.6 | 0.6 | 0.3 | 0.0 | 2 | No | 11,500 |
| 8d | 8 | San Bernardino | Running Springs | Hwy 18 | 8_SBD_18_294 | 8_SBD_18_290 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 5,750 |
| 8e | 8 | San Bernardino | Skyforest | Hwy 18 | 8_SBD_18_263 | 8_SBD_18_261 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 5,750 |
| 8f | 8 | Riverside | Palo Verde Intake | US Hwy 95 | 8_RIV_95_125 | 8_RIV_95_123 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 1,300 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | |
| 9a | 9 | Mono | Bridgeport | US Hwy 395 | 9_MNO_395_819 | 9_MNO_395_809 | red | 1.0 | 0.5 | 0.3 | 0.2 | 2 | No | 3,050 |
| 9b | 9 | Mono | Whitmore Hot Spr. | US Hwy 395 | 9_MNO_395_202 | 9_MNO_395_195 | red | 0.7 | 0.3 | 0.3 | 0.1 | 4 | No | 7,250 |
| 9c | 9 | Mono | Grant Lake | US Hwy 395 | 9_MNO_395_448 | 9_MNO_395_445 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 4,625 |
| | | | | | | | | | | | | | | |
| 10a | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_127 | 10_MPA_49_111 | red | 1.6 | 0.4 | 0.2 | 0.2 | 2 | Yes | 5,200 |
| 10b | 10 | Calaveras | San Andreas | Hwy 49 | 10_CAL_49_208 | 10_CAL_49_205 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 7,250 |
| | | | | | | | | | | | | | | |
| 11a | 11 | San Diego | Warner Springs | Hwy 79 | 11_SD_79_363 | 11_SD_79_357 | red | 0.6 | 0.2 | 0.2 | 0.2 | 2 | No | 1,400 |
| 11b | 11 | San Diego | Santa Ysabel | Hwy 78 | 11_SD_78_548 | 11_SD_78_520 | red | 2.8 | 0.5 | 0.3 | 0.1 | 2 | No | 4,425 |
| 11c | 11 | San Diego | Lake Cuyamaca | Hwy 79 | 11_SD_79_103 | 11_SD_79_99 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 1,650 |
| 11d | 11 | San Diego | La Jolla | I-5 | 11_SD_5_298 | 11_SD_5_295 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 12 | No | 174,500 |
| | | | | | | | | | | | | | | |
| 12a | 12 | Orange | Las Flores | Hwy 241 | 12_ORA_241_168 | 12_ORA_241_152 | red | 1.6 | 0.3 | 0.2 | 0.1 | 4 | Yes | 6,900 |
| 12b | 12 | Orange | Peters Cany. Res. | Hwy 261 | 12_ORA_261_59 | 12_ORA_261_56 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 5 | Yes | 32,200 |
| 12c | 12 | Orange | Villa Park | Hwy 241 | 12_ORA_241_388 | 12_ORA_241_385 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 9 | No | 47,800 |
| 12d | 12 | Orange | Laguna Woods | Hwy 73 | 12_ORA_73_167 | 12_ORA_73_165 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 7 | No | 62,700 |

**Table 13: The "worst" hot spots based on analyses for mule deer carcasses per Caltrans district.**
**Note: AADT = Annual Average Daily Traffic.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1A | 1 | Humboldt | Eureka | US Hwy 101 | 1_HUM_101_704 | 1_HUM_101_681 | red | 2.3 | 0.9 | 0.7 | 0.1 | 4 | yes | 24150 |
| 1B | 1 | Humboldt | Fortuna | US Hwy 101 | 1_HUM_101_641 | 1_HUM_101_601 | yellow | 4.0 | 1.5 | 0.0 | 0.0 | 4 | yes | 24000 |
| 1C | 1 | Mendocino | Inglenook | Hwy 1 | 1_MEN_1_685 | 1_MEN_1_681 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 4925 |
| 1D | 1 | Mendocino | Fort Bragg | Hwy 1 | 1_MEN_1_640 | 1_MEN_1_636 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 4925 |
| 1E | 1 | Mendocino | Caspar | Hwy 1 | 1_MEN_1_554 | 1_MEN_1_534 | yellow | 2.0 | 0.5 | 0.0 | 0.0 | 2 | Yes | 10200 |
| 1F | 1 | Mendocino | Little River | Hwy 1 | 1_MEN_1_483 | 1_MEN_1_479 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | Yes | 3750 |
| 1G | 1 | Mendocino | Elk | Hwy 1 | 1_MEN_1_275 | 1_MEN_1_272 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 1300 |
| 1H | 1 | Mendocino | Anchor Bay | Hwy 1 | 1_MEN_1_30 | 1_MEN_1_28 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 3500 |
| 1I | 1 | Lake | Blue Lakes | Hwy 20 | 1_LAK_20_10 | 1_LAK_20_12 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 9650 |
| 1J | 1 | Lake | Pepperwood Grove | Hwy 20 | 1_LAK_20_180 | 1_LAK_20_192 | yellow | 1.2 | 0.6 | 0.0 | 0.0 | 2 | No | 8100 |
| 1K | 1 | Lake | Clearlake Oaks | Hwy 20 | 1_LAK_20_289 | 1_LAK_20_297 | yellow | 0.8 | 0.6 | 0.0 | 0.0 | 2 | No | 8150 |
| 1L | 1 | Lake | Riviera Estates | Hwy 281 | 1_LAK_281_167 | 1_LAK_281_169 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 2 | No | 6400 |
| 1M | 1 | Lake | Jct Hwy 281 | Hwy 29 | 1_LAK_29_262 | 1_LAK_29_259 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 9350 |
| 1N | 1 | Lake | Lower lake | Hwy 29 | 1_LAK_29_207 | 1_LAK_29_198 | yellow | 0.9 | 0.6 | 0.0 | 0.0 | 2 | No | 10900 |
| 1O | 1 | Lake | Hidden Valley L. | Hwy 29 | 1_LAK_29_112 | 1_LAK_29_110 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 9900 |
| | | | | | | | | | | | | | | |
| 2A | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_471 | 2_SIS_5_418 | red | 6.3 | 1.3 | 0.3 | 0.2 | 4 | Yes | 19000 |
| 2B | 2 | Siskiyou | Weed | I-5 | 2_SIS_5_202 | 2_SIS_5_199 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 17050 |
| 2C | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_126 | 2_SIS_5_122 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 23900 |
| 2D | 2 | Siskiyou | Dunsmuir | I-5 | 2_SIS_5_15 | 2_SIS_5_4 | yellow | 1.1 | 0.5 | 0.0 | 0.0 | 4 | No | 20350 |
| 2E | 2 | Siskiyou | Ft. Jones | Hwy 3 | 2_SIS_3_332 | 2_SIS_3_329 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 3625 |
| 2F | 2 | Siskiyou | Indian Tom Lake | US Hwy 97 | 2_SIS_97_540 | 2_SIS_97_524 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | | 665 |
| 2G | 2 | Siskiyou | Macdoel | US Hwy 97 | 2_SIS_97_405 | 2_SIS_97_403 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 1190 |
| 2H | 2 | Modoc | Hannchen | Hwy 139 | 2_MOD_139_391 | 2_MOD_139_385 | yellow | 0.6 | 0.6 | 0.0 | 0.0 | 2 | No | 1625 |
| 2I | 2 | Modoc | Hannchen | Hwy 139 | 2_MOD_139_356 | 2_MOD_139_353 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 1625 |
| | | | | | | | | | | | | | | |
| | 3 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 4A | 4 | San Mateo | Highlands-Baywood P. | Hwy 92 | 4_SM_92_96 | 4_SM_92_79 | orange | 1.7 | 0.9 | 0.1 | 0.0 | 4 | No | 77200 |
| 4B | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_165 | 4_SCL_280_144 | orange | 2.1 | 0.6 | 0.2 | 0.0 | 8 | No | 131500 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 4C | 4 | Alameda | Mission San Jose | I-680 | 4_ALA_680_67 | 4_ALA_680_64 | red | 0.5 | 0.2 | 0.2 | 0.1 | 6 | No | 155400 |
| 4D | 4 | Contra Costa | Orinda | Hwy 24 | 4_CC_24_27 | 4_CC_24_19 | orange | 0.8 | 0.2 | 0.6 | 0.0 | 8 | No | 188000 |
| 4E | 4 | Contra Costa | Alamo | I-680 | 4_CC_680_116 | 4_CC_680_110 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 6 | No | 153850 |
| | | | | | | | | | | | | | | |
| | 5 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 6A | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_393 | 6_MAD_41_196 | red | 19.7 | 2.6 | 0.6 | 0.3 | 2 | No | 19000 |
| 6B | 6 | Tuolumne | Three Rivers | Hwy 198 | 6_TUL_198_374 | 6_TUL_198_369 | red | 0.5 | 0.2 | 0.2 | 0.1 | 2 | Yes | 4525 |
| 6C | 6 | Tuolumne | Three Rivers | Hwy 198 | 6_TUL_198_440 | 6_TUL_198_400 | yellow | 4.4 | 0.6 | 0.0 | 0.0 | 2 | Yes | 3175 |
| 6D | 6 | Kern | Alta Sierra | Hwy 155 | 6_KER_155_491 | 6_KER_155_469 | yellow | 2.2 | 0.2 | 0.0 | 0.0 | 2 | No | 355 |
| | | | | | | | | | | | | | | |
| | 7 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | 8 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 9A | 9 | Mono | Topaz Lake | US Hwy 395 | 9_MNO_395_1201 | 9_MNO_395_1178 | orange | 2.3 | 0.6 | 0.3 | 0.0 | 2 | No | 3900 |
| 9B | 9 | Mono | Walker | US Hwy 395 | 9_MNO_395_1143 | 9_MNO_395_1058 | red | 8.5 | 1.7 | 1.2 | 0.8 | 2 | Yes | 3550 |
| 9C | 9 | Mono | Walker | US Hwy 395 | 9_MNO_395_1032 | 9_MNO_395_1008 | orange | 2.4 | 0.5 | 0.1 | 0.0 | 2 | No | 3425 |
| 9D | 9 | Mono | Sonora Junction | US Hwy 395 | 9_MNO_395_989 | 9_MNO_395_878 | orange | 11.1 | 3.6 | 0.7 | 0.0 | 2 | Yes | 3425 |
| 9E | 9 | Mono | Mono City | US Hwy 395 | 9_MNO_395_641 | 9_MNO_395_579 | orange | 6.2 | 0.8 | 0.1 | 0.0 | 4 | Yes | 3350 |
| 9F | 9 | Mono | Whitmore Hot Sprs. | US Hwy 395 | 9_MNO_395_282 | 9_MNO_395_134 | red | 15.6 | 2.4 | 0.6 | 0.1 | 4 | Yes | 7200 |
| | | | | | | | | | | | | | | |
| 10A | 10 | Amador | Pine Grove | Hwy 88 | 10_AMA_88_377 | 10_AMA_88_149 | red | 22.6 | 10.8 | 10.2 | 0.5 | 2 | No | 8250 |
| 10B | 10 | Amador | Jackson | Hwy 49 | 10_AMA_49_58 | 10_AMA_49_0 | orange | 5.8 | 0.2 | 1.6 | 0.0 | 2 | No | 8100 |
| 10C | 10 | Tuolumne | Mono Vista | Hwy 108 | 10_TUO_108_154 | 10_TUO_108_0 | orange | 15.4 | 5.3 | 0.2 | 0.0 | 2 | Yes | 3975 |
| 10D | 10 | Tuolumne | Moccasin | Hwy 120 | 10_TUO_120_244 | 10_TUO_120_219 | orange | 3.0 | 2.0 | 0.2 | 0.0 | 2 | Yes | 4425 |
| 10E | 10 | Tuolumne | Groveland | Hwy 120 | 10_TUO_120_410 | 10_TUO_120_303 | orange | 10.7 | 2.1 | 0.1 | 0.0 | 2 | No | 6225 |
| 10F | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_196 | 10_MPA_49_78 | orange | 11.8 | 3.0 | 0.3 | 0.0 | 2 | Yes | 5200 |
| 10G | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_38 | 10_MPA_49_9 | orange | 2.9 | 1.1 | 0.1 | 0.0 | 2 | No | 3500 |
| | | | | | | | | | | | | | | |
| | 11 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 12A | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 12_ORA_241_339 | 12_ORA_241_321 | red | 1.8 | 0.8 | 0.2 | 0.1 | 6 | Yes | 40150 |
| 12B | 12 | Orange | Las Flores | Hwy 241 | 12_ORA_241_170 | 12_ORA_241_150 | orange | 2.0 | 0.5 | 0.1 | 0.0 | 4 | Yes | 6900 |
| 12C | 12 | Orange | San Joaquin Hills | Hwy 73 | 12_ORA_73_198 | 12_ORA_73_173 | orange | 2.5 | 1.0 | 0.2 | 0.0 | 8 | Yes | 67650 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 12D | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 12_ORA_241_373 | 12_ORA_241_369 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 7 | Yes | 47800 |
| 12E | 12 | Orange | Rancho Mission Viejo | Hwy 74 | 12_ORA_74_97 | 12_ORA_74_93 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 11100 |

*Maps of the Reported Carcasses for Selected Other Species*

The locations of the reported carcasses of black bear, elk, mountain lion, bighorn sheep, pronghorn, and wild boar carcasses are shown in Figures 12-17. Black bear carcasses were reported from north-west California, along east and west slopes of the Sierra Nevada, and areas north, west, and east of Los Angeles (Figure 12). Elk carcasses were reported from northern California, north-western California, and along the eastern slope of the Sierra Nevada (Figure 13). Mountain lion carcasses were rarely reported, but have been found from north to south in the state (Figure 14). Bighorn sheep carcasses were reported in the Mojave Desert (Figure 15). The one pronghorn carcass was reported from near the Oregon border (Figure 16). Wild boar carcasses were reported from the western foothills of the Sierra Nevada between Fresno and Bakersfield (Figure 17).




**Figure 12: The locations of the reported black bear carcasses.**




**Figure 13: The locations of the reported elk carcasses.**




**Figure 14: The locations of the reported mountain lion carcasses.**




**Figure 15: The locations of the reported bighorn sheep carcasses.**




**Figure 16: The locations of the reported pronghorn carcasses.**




**Figure 17: The locations of the reported wild boar carcasses.**

## 4.4. Discussion

In some districts (Caltrans Districts 2, 4, 6, 9, 10, and 12) there is at least some spatial similarity between the hot spots based on deer-vehicle crash data and mule deer carcass data. Since these two data sources are independent, this makes it more likely that there is indeed a relatively high concentration of deer-vehicle collisions along these road sections. However, there is also evidence of missing mule deer carcass data from certain areas, especially in Districts 1 and 2.

In addition to the general underreporting of mule deer carcasses compared to crash data in all districts except District 10 (see Chapter 3), the hot spot analyses in this chapter illustrate that in at least some of the districts (i.e. Districts 1 and 2) some areas within a district did not report any mule deer carcasses whereas these same areas did report deer-vehicle crashes, sometimes in high enough numbers to result in the identification of hot spots. This suggests that the quality of the mule deer carcass data can benefit from more consistent search and reporting effort in the different areas of some districts. Practical suggestions include verification that all maintenance crews do record and submit mule deer carcasses, especially along road sections already identified as hot spots based on deer-vehicle crash data, and that these records are entered in the central database. Regular data entry and standard data summary reports can help identify areas from which mule deer carcasses are substantially below the expected number of observations.

# 5. PRIORITIZATION DEER-VEHICLE CRASH AND MULE DEER CARCASS HOT SPOTS

## 5.1. Introduction

Chapter 4 identified the worst deer-vehicle crash and mule deer carcass hot spots based on a statewide analysis (crash data only) and analyses per Caltrans district (crash and carcass data). In this chapter, these hot spots are prioritized based on parameters related to human safety, biological conservation, and economics.

## 5.2. Methods

The deer-vehicle crash and mule deer carcass hot spots were prioritized based on three types of parameters:

- **Human safety:** the absolute number of deer-vehicle crashes or mule deer carcasses recorded in each hot spot over 10 years (crash data 2005 through 2014; carcass data 2000 through 2009).
- **Biological conservation:** whether the hot spot was (partially) located in or adjacent to one or both of the following types of areas:
    - A "Natural Landscape Block" or an "Essential Connectivity Area" (Figure 18). The researchers used existing maps generated through the California Essential Habitat Connectivity Project (Spencer et al., 2010) to identify areas that are considered most important to a spatial network of areas important to nature conservation. The maps distinguish between "Natural Landscape Blocks" and "Essential Connectivity Areas". Natural Landscape Blocks are relatively large areas (blocks ≥10,000 acres (≥4,047 ha)) with relatively high nature conservation values. Essential Connectivity Areas are paths of least resistance between these Natural Landscape Blocks (Spencer et al., 2010). Of the 15,090 highway miles (24,285 km) that are part of this project, 4,048 miles (6,515 km) (26.8%) overlapped with a "Natural Landscape Block" or an "Essential Connectivity Area".
    - Critical habitat for threatened or endangered species (USFWS, 2019) (Figure 19). Of the 15,090 highway miles (24,285 km) that are part of this project, 1,353 miles (2,177 km) (9.0%) overlapped with critical habitat.

  Note that of the 15,090 highway miles (24,285 km) that are part of this project, 4,741 miles (4,741 km) (31.4%) overlapped with either a "Natural Landscape Block", an "Essential Connectivity Area" or critical habitat.
- **Economics:** The total estimated costs associated with deer-vehicle crashes or mule deer carcasses in a hot spot, standardized per mile per year. Each deer-vehicle collision (crash or carcass) was set at $6,617 (Huijser et al., 2009). Note that this value is primarily based on human safety parameters and not on passive use values for wildlife.




**Figure 18: "Natural Landscape Block" or an "Essential Connectivity Area" from the California Essential Habitat Connectivity Project (Spencer et al., 2010).**




**Figure 19: Critical habitat for threatened or endangered species (USFWS, 2019).**

Each of the three types of parameters contributed equally to the prioritization process. The human safety, biological conservation and economic parameters each had 100 "points" that were distributed over the hot spots included in that analysis. For example, for the statewide deer-vehicle crash hot spot analysis, there were 13 hot spots, and depending on the number of deer-vehicle crashes in a hot spot, each hot spot received a portion of the 100 human safety points. However, for the "per-district analyses", the 100 points were distributed over the hot spots within each district.

For biological conservation there were two sub-parameters; one for a hot spot being in a Natural Landscape Block or an Essential Connectivity Area and one for a hot spot being in critical habitat for threatened or endangered species. For each hot spot, the researchers tallied whether the hot spot met one, both, or neither of the two sub-parameters. This resulted in a maximum tally of "2" for each hot spot. The researchers then tallied how many points (2 maximum per hot spot) were allotted to all of the hot spots that were part of that particular analysis. Based on this total number, and the tally for the individual hot spots, the 100 points for biological conservation were proportionally distributed over the hot spots.

Finally, the economics parameter was also allotted 100 points that were distributed over the hot spots that were part of the analysis. Note that the economic parameter was expressed in dollars per mile per year. These dollar values can be compared to the economic thresholds for different types and combinations of mitigation measures by Huijser et al. (2009) (Table 14).

The total score for human safety, biological conservation, and for economics was summed and divided by 3. This meant that the sum of the total score for each analysis was 100 points, distributed over the individual hot spots that were part of that analysis. The hot spots were ranked based on this final score.

If a hot spot was in or adjacent to critical habitat, the authors of this report listed the threatened or endangered animal species concerned. Knowing which threatened or endangered animal species are present in or near a hot spot can help guide the design of mitigation measures aimed at reducing deer-vehicle collisions and providing habitat connectivity for a wide range of animal species. It can help guide the design so that threatened or endangered species may also benefit from the mitigation measures, or it can help guide the design so that the threatened or endangered species are not negatively impacted by the mitigation measures.

While it may seem strange to include non-terrestrial animal species (e.g. fish and birds) in this analysis, it is advisable to include all species. For example, if an underpass for large mammals is combined with a stream crossing, knowing about threatened or endangered fish species is important for the decision, design, construction and maintenance phase. Similarly, knowing about threatened or endangered birds in the area can be important for potential vegetation management in the rights-of-way (either as a stand-alone measure, or at the approaches of crossing structures for large wild mammals). We also included all listed animal species in the weighting process for how important a road section is to biological conservation. All animal species can suffer from habitat fragmentation associated with highways; terrestrial species are confronted with open habitat, unnatural substrate (pavement) and traffic, aquatic species may be confronted with changes in hydrology, light, and aquatic vegetation in culverts or other

structures under the highway, and flying species may be reluctant to cross the open linear areas resulting from highways and adjacent rights-of-way.

**Table 14: Economic thresholds (primarily based on human safety parameters) for the implementation of different types and combinations of mitigation measures (based on Huijser et al., 2009).**

| Measure | Threshold | |
|---|---|---|
| | per km per year | per mile per year |
| Fence, underpass (one per 2 km (1.24 mile)), jump-outs | $18,123 | $29,166.07 |
| Fence, underpass (one per 2 km) and overpass (one per 24 km (14.91 mile)), jump-outs | $24,230 | $38,994.31 |
| Animal detection system (ADS) | $37,014 | $59,568.11 |
| Fence, gap with ADS (one per 2 km (1.24 mile)), jump-outs | $28,150 | $45,302.92 |

## 5.3. Results

The scoring results and the final ranking processes for the statewide deer-vehicle crash analyses and the deer-vehicle crash and mule deer carcass analyses per district are summarized in Tables 15 through 17.

**Table 15: The ranking of the hot spots based on a statewide analysis for deer-vehicle crashes in the entire State of California.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Deer crashes (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Deer crashes ($/mi/yr) | Score | Score | Rank |
| 1 | 1 | Del Norte | Crescent City | US Hwy 101 | 10 | 5.08 | Yes | No | 16.67 | $33,085.00 | 10.95 | 10.90 | 4 |
| 2 | 1 | Humboldt | Orick | US Hwy 101 | 10 | 5.08 | Yes | Yes | 33.33 | $22,056.67 | 7.30 | 15.24 | 1 |
| 3 | 2 | Siskiyou | Yreka | I-5 | 5 | 2.54 | No | No | 0.00 | $33,085.00 | 10.95 | 4.50 | 10 |
| 4 | 2 | Siskiyou | Mt. Shasta | I-5 | 10 | 5.08 | No | No | 0.00 | $22,056.67 | 7.30 | 4.13 | 11 |
| 5 | 2 | Tehama | Red Bluff | I-5 | 10 | 5.08 | Yes | No | 16.67 | $22,056.67 | 7.30 | 9.68 | 5 |
| 6 | 2 | Lassen | Susanville | US Hwy 395 | 44 | 22.34 | No | No | 0.00 | $11,198.00 | 3.71 | 8.68 | 6 |
| 7 | 3 | El Dorado | Placerville | US Hwy 50 | 8 | 4.06 | No | No | 0.00 | $17,645.33 | 5.84 | 3.30 | 13 |
| 8 | 4 | Santa Clara | Los Altos Hills | I-280 | 10 | 5.08 | No | No | 0.00 | $33,085.00 | 10.95 | 5.34 | 8 |
| 9 | 5 | San Luis Obispo | Templeton | US Hwy 101 | 19 | 9.64 | No | No | 0.00 | $25,144.60 | 8.33 | 5.99 | 7 |
| 10 | 6 | Madera | Oakhurst | Hwy 41 | 13 | 6.60 | No | No | 0.00 | $21,505.25 | 7.12 | 4.57 | 9 |
| 11 | 9 | Mono | Bridgeport | US Hwy 395 | 29 | 14.72 | Yes | No | 16.67 | $19,189.30 | 6.35 | 12.58 | 2 |
| 12 | 9 | Mono | Mammoth Lakes | US Hwy 395 | 20 | 10.15 | Yes | No | 16.67 | $22,056.67 | 7.30 | 11.37 | 3 |
| 13 | 10 | Mariposa | Mariposa | Hwy 49 | 9 | 4.57 | No | No | 0.00 | $19,851.00 | 6.57 | 3.71 | 12 |

**Table 16: The ranking of the hot spots based on analyses for deer-vehicle crashes per Caltrans district.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Deer crashes (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Deer crashes ($/mi/yr) | Score | Score | Rank |
| 1a | 1 | Del Norte | Crescent City | US Hwy 101 | 11 | 19.64 | Yes | No | 25.00 | $12,131.17 | 10.65 | 18.43 | 2 |
| 1b | 1 | Humboldt | Orick | US Hwy 101 | 13 | 23.21 | Yes | Yes | 50.00 | $10,752.63 | 9.44 | 27.55 | 1 |
| 1c | 1 | Humboldt | Arcata | US Hwy 101 | 6 | 10.71 | No | No | 0.00 | $13,234.00 | 11.62 | 7.45 | 6 |
| 1d | 1 | Humboldt | Redway | US Hwy 101 | 7 | 12.50 | No | Yes | 25.00 | $11,579.75 | 10.17 | 15.89 | 3 |
| 1e | 1 | Humboldt | Redway | US Hwy 101 | 5 | 8.93 | No | No | 0.00 | $16,542.50 | 14.53 | 7.82 | 4 |
| 1f | 1 | Humboldt | Redway | US Hwy 101 | 3 | 5.36 | No | No | 0.00 | $19,851.00 | 17.43 | 7.60 | 5 |
| 1g | 1 | Mendocino | Laytonville | US Hwy 101 | 6 | 10.71 | No | No | 0.00 | $13,234.00 | 11.62 | 7.45 | 6 |
| 1h | 1 | Mendocino | Willits | US Hwy 101 | 5 | 8.93 | No | No | 0.00 | $16,542.50 | 14.53 | 7.82 | 4 |
| | | | | | | | | | | | | | |
| 2a | 2 | Siskiyou | Hornbrook | I-5 | 19 | 11.45 | Yes | No | 25.00 | $5,028.92 | 4.95 | 13.80 | 4 |
| 2b | 2 | Siskiyou | Yreka | I-5 | 8 | 4.82 | No | No | 0.00 | $17,645.33 | 17.38 | 7.40 | 5 |
| 2c | 2 | Siskiyou | Yreka | I-5 | 13 | 7.83 | No | No | 0.00 | $14,336.83 | 14.12 | 7.32 | 6 |
| 2d | 2 | Siskiyou | Mt. Shasta | I-5 | 11 | 6.63 | No | No | 0.00 | $14,557.40 | 14.34 | 6.99 | 7 |
| 2e | 2 | Tehama | Red Bluff | I-5 | 10 | 6.02 | Yes | No | 25.00 | $13,234.00 | 13.03 | 14.69 | 2 |
| 2f | 2 | Tehama | Red Bluff | I-5 | 10 | 6.02 | Yes | No | 25.00 | $13,234.00 | 13.03 | 14.69 | 2 |
| 2g | 2 | Lassen | Susanville | US Hwy 395 | 87 | 52.41 | No | No | 0.00 | $10,279.98 | 10.12 | 20.84 | 1 |
| 2h | 2 | Siskiyou | Black Butte | I-5 | 8 | 4.82 | Yes | No | 25.00 | $13,234.00 | 13.03 | 14.28 | 3 |
| | | | | | | | | | | | | | |
| 3a | 3 | El Dorado | Placerville | US Hwy 50 | 19 | 10.80 | No | No | 0.00 | $13,969.22 | 9.63 | 6.81 | 3 |
| 3b | 3 | El Dorado | Perks Corner | US Hwy 50 | 35 | 19.89 | No | No | 0.00 | $6,259.32 | 4.32 | 8.07 | 2 |
| 3c | 3 | El Dorado | Shingle Springs | US Hwy 50 | 28 | 15.91 | No | No | 0.00 | $5,449.29 | 3.76 | 6.56 | 4 |
| 3d | 3 | Sacramento | Rancho Murieta | Hwy 16 | 5 | 2.84 | Yes | No | 100.00 | $11,028.33 | 7.60 | 36.82 | 1 |
| 3e | 3 | Nevada | Grass Valley | Hwy 49/20 | 13 | 7.39 | No | No | 0.00 | $17,204.20 | 11.86 | 6.42 | 5 |
| 3f | 3 | Nevada | Grass Valley | Hwy 20 | 6 | 3.41 | No | No | 0.00 | $9,925.50 | 6.84 | 3.42 | 10 |
| 3g | 3 | Nevada | Penn Valley | Hwy 20 | 7 | 3.98 | No | No | 0.00 | $11,579.75 | 7.99 | 3.99 | 9 |
| 3h | 3 | Nevada | La Barr Meadows | Hwy 49 | 7 | 3.98 | No | No | 0.00 | $11,579.75 | 7.99 | 3.99 | 9 |
| 3i | 3 | Nevada | Alta Sierra | Hwy 49 | 15 | 8.52 | No | No | 0.00 | $9,023.18 | 6.22 | 4.91 | 6 |
| 3j | 3 | Nevada | Higgins Corner | Hwy 49 | 22 | 12.50 | No | No | 0.00 | $10,398.14 | 7.17 | 6.56 | 4 |
| 3k | 3 | Placer | Overhill Dr | Hwy 49 | 6 | 3.41 | No | No | 0.00 | $13,234.00 | 9.13 | 4.18 | 8 |
| 3l | 3 | Placer | Elders Corner | Hwy 49 | 7 | 3.98 | No | No | 0.00 | $15,439.67 | 10.65 | 4.87 | 7 |
| 3m | 3 | Placer | Weimar | I-80 | 6 | 3.41 | No | No | 0.00 | $9,925.50 | 6.84 | 3.42 | 10 |
| | | | | | | | | | | | | | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Deer crashes (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Deer crashes ($/mi/yr) | Score | Score | Rank |
| 4a | 4 | Marin | San Rafael | US Hwy 101 | 6 | 4.38 | Yes | No | 10.00 | $13,234.00 | 9.13 | 7.84 | 6 |
| 4b | 4 | Marin | Strawberry | US Hwy 101 | 6 | 4.38 | No | No | 0.00 | $13,234.00 | 9.13 | 4.50 | 9 |
| 4c | 4 | San Mateo | Highlands-Baywood Park | I-280 | 19 | 13.87 | Yes | Yes | 20.00 | $5,714.68 | 3.94 | 12.60 | 2 |
| 4d | 4 | San Mateo | Woodside | I-280 | 62 | 45.26 | Yes | Yes | 20.00 | $6,410.22 | 4.42 | 23.23 | 1 |
| 4e | 4 | Santa Clara | Stanford | I-280 | 14 | 10.22 | Yes | No | 10.00 | $3,563.00 | 2.46 | 7.56 | 7 |
| 4f | 4 | Santa Clara | Los Altos Hills | I-280 | 10 | 7.30 | Yes | No | 10.00 | $16,542.50 | 11.41 | 9.57 | 4 |
| 4g | 4 | Contra Costa | Condit | Hwy 24 | 5 | 3.65 | Yes | No | 10.00 | $16,542.50 | 11.41 | 8.35 | 5 |
| 4h | 4 | Contra Costa | Orinda | Hwy 24 | 7 | 5.11 | Yes | Yes | 20.00 | $11,579.75 | 7.99 | 11.03 | 3 |
| 4i | 4 | Alameda | Redwood Heights | Hwy 13 | 8 | 5.84 | No | No | 0.00 | $17,645.33 | 12.17 | 6.00 | 8 |
| | | | | | | | | | | | | | |
| 5a | 5 | San Luis Obispo | Templeton | US Hwy 101 | 19 | 100.00 | No | No | 100 | $25,144.60 | 100 | 100 | 1 |
| | | | | | | | | | | | | | |
| 6a | 6 | Madera | Oakhurst | Hwy 41 | 15 | 71.43 | No | No | 0 | $19,851.00 | 58.41 | 43.28 | 1 |
| 6b | 6 | Madera | Oakhurst | Hwy 41 | 6 | 28.57 | No | No | 0 | $13,234.00 | 38.94 | 22.50 | 2 |
| | | | | | | | | | | | | | |
| 7a | 7 | Los Angeles | Glendale | Hwy 134 | 8 | 19.05 | No | No | 0.00 | $13,234.00 | 26.17 | 15.07 | 4 |
| 7b | 7 | Los Angeles | Glendale | Hwy 2 | 18 | 42.86 | No | No | 0.00 | $4,253.79 | 8.41 | 17.09 | 3 |
| 7c | 7 | Los Angeles | Sherman Oaks | I-405 | 6 | 14.29 | No | No | 0.00 | $9,925.50 | 19.63 | 11.30 | 5 |
| 7d | 7 | Ventura | Casitas Springs | Hwy 33 | 6 | 14.29 | Yes | Yes | 50.00 | $9,925.50 | 19.63 | 27.97 | 2 |
| 7e | 7 | Ventura | Moorpark | Hwy 118 | 4 | 9.52 | Yes | Yes | 50.00 | $13,234.00 | 26.17 | 28.56 | 1 |
| | | | | | | | | | | | | | |
| 8a | 8 | San Bernardino | Crestline | Hwy 18 | 6 | 23.08 | Yes | No | 16.67 | $3,609.27 | 11.06 | 16.94 | 4 |
| 8b | 8 | San Bernardino | Silverwood Lake | Hwy 138 | 2 | 7.69 | Yes | Yes | 33.33 | $6,617.00 | 20.28 | 20.44 | 2 |
| 8c | 8 | San Bernardino | Running Springs | Hwy 330 | 10 | 38.46 | Yes | No | 16.67 | $2,545.00 | 7.80 | 20.98 | 1 |
| 8d | 8 | San Bernardino | Running Springs | Hwy 18 | 4 | 15.38 | Yes | No | 16.67 | $6,617.00 | 20.28 | 17.44 | 3 |
| 8e | 8 | San Bernardino | Skyforest | Hwy 18 | 2 | 7.69 | Yes | No | 16.67 | $6,617.00 | 20.28 | 14.88 | 5 |
| 8f | 8 | Riverside | Palo Verde Intake | US Hwy 95 | 2 | 7.69 | No | No | 0.00 | $6,617.00 | 20.28 | 9.33 | 6 |
| | | | | | | | | | | | | | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Deer crashes (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Deer crashes ($/mi/yr) | Score | Score | Rank |
| 9a | 9 | Mono | Bridgeport | US Hwy 395 | 30 | 50.85 | Yes | No | 33.33 | $19,851.00 | 34.62 | 39.60 | 1 |
| 9b | 9 | Mono | Whitmore Hot Springs | US Hwy 395 | 21 | 35.59 | Yes | No | 33.33 | $19,851.00 | 34.62 | 34.51 | 2 |
| 9c | 9 | Mono | Grant Lake | US Hwy 395 | 8 | 13.56 | Yes | No | 33.33 | $17,645.33 | 30.77 | 25.89 | 3 |
| | | | | | | | | | | | | | |
| 10a | 10 | Mariposa | Bootjack | Hwy 49 | 22 | 84.62 | No | No | 0.00 | $9,098.38 | 50.77 | 45.13 | 2 |
| 10b | 10 | Calaveras | San Andreas | Hwy 49 | 4 | 15.38 | Yes | No | 100.00 | $8,822.67 | 49.23 | 54.87 | 1 |
| | | | | | | | | | | | | | |
| 11a | 11 | San Diego | Warner Springs | Hwy 79 | 6 | 27.27 | Yes | Yes | 50.00 | $6,617.00 | 32.19 | 36.49 | 1 |
| 11b | 11 | San Diego | Santa Ysabel | Hwy 78 | 10 | 45.45 | Yes | No | 25.00 | $2,363.21 | 11.49 | 27.32 | 2 |
| 11c | 11 | San Diego | Lake Cuyamaca | Hwy 79 | 3 | 13.64 | Yes | No | 25.00 | $4,962.75 | 24.14 | 20.93 | 3 |
| 11d | 11 | San Diego | La Jolla | I-5 | 3 | 13.64 | No | No | 0.00 | $6,617.00 | 32.19 | 15.27 | 4 |
| | | | | | | | | | | | | | |
| 12a | 12 | Orange | Las Flores | Hwy 241 | 12 | 52.17 | No | No | 0.00 | $4,962.75 | 15.25 | 22.48 | 2 |
| 12b | 12 | Orange | Peters Canyon Reservoir | Hwy 261 | 4 | 17.39 | No | No | 0.00 | $8,822.67 | 27.12 | 14.84 | 3 |
| 12c | 12 | Orange | Villa Park | Hwy 241 | 4 | 17.39 | No | No | 0.00 | $8,822.67 | 27.12 | 14.84 | 3 |
| 12d | 12 | Orange | Laguna Woods | Hwy 73 | 3 | 13.04 | Yes | No | 100.00 | $9,925.50 | 30.51 | 47.85 | 1 |

**Table 17: The ranking of the hot spots based on analyses for mule deer carcasses per Caltrans district.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Mule deer car-casses (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Mule deer carcasses ($/mi/yr) | Score | Score | Rank |
| 1A | 1 | Humboldt | Eureka | US Hwy 101 | 20 | 25.32 | No | Yes | 25.00 | $5,753.91 | 8.16 | 19.49 | 1 |
| 1B | 1 | Humboldt | Fortuna | US Hwy 101 | 19 | 24.05 | No | Yes | 25.00 | $3,143.08 | 4.46 | 17.84 | 2 |
| 1C | 1 | Mendocino | Inglenook | Hwy 1 | 3 | 3.80 | No | No | 0.00 | $4,962.75 | 7.04 | 3.61 | 9 |
| 1D | 1 | Mendocino | Fort Bragg | Hwy 1 | 3 | 3.80 | No | No | 0.00 | $4,962.75 | 7.04 | 3.61 | 9 |
| 1E | 1 | Mendocino | Caspar | Hwy 1 | 5 | 6.33 | No | No | 0.00 | $1,654.25 | 2.35 | 2.89 | 12 |
| 1F | 1 | Mendocino | Little River | Hwy 1 | 2 | 2.53 | Yes | No | 25.00 | $3,308.50 | 4.69 | 10.74 | 4 |
| 1G | 1 | Mendocino | Elk | Hwy 1 | 2 | 2.53 | No | No | 0.00 | $4,411.33 | 6.26 | 2.93 | 11 |
| 1H | 1 | Mendocino | Anchor Bay | Hwy 1 | 2 | 2.53 | No | No | 0.00 | $6,617.00 | 9.39 | 3.97 | 6 |
| 1I | 1 | Lake | Blue Lakes | Hwy 20 | 2 | 2.53 | Yes | No | 25.00 | $6,617.00 | 9.39 | 12.31 | 3 |
| 1J | 1 | Lake | Pepperwood Grove | Hwy 20 | 5 | 6.33 | No | No | 0.00 | $2,757.08 | 3.91 | 3.41 | 11 |
| 1K | 1 | Lake | Clearlake Oaks | Hwy 20 | 6 | 7.59 | No | No | 0.00 | $4,962.75 | 7.04 | 4.88 | 5 |
| 1L | 1 | Lake | Riviera Estates | Hwy 281 | 1 | 1.27 | No | No | 0.00 | $6,617.00 | 9.39 | 3.55 | 10 |
| 1M | 1 | Lake | Jct Hwy 281 | Hwy 29 | 2 | 2.53 | No | No | 0.00 | $4,411.33 | 6.26 | 2.93 | 11 |
| 1N | 1 | Lake | Lower lake | Hwy 29 | 5 | 6.33 | No | No | 0.00 | $3,676.11 | 5.22 | 3.85 | 8 |
| 1O | 1 | Lake | Hidden Valley lake | Hwy 29 | 2 | 2.53 | No | No | 0.00 | $6,617.00 | 9.39 | 3.97 | 6 |
| | | | | | | | | | | | | | |
| 2A | 2 | Siskiyou | Yreka | I-5 | 35 | 58.33 | No | No | 0.00 | $3,676.11 | 8.39 | 22.24 | 1 |
| 2B | 2 | Siskiyou | Weed | I-5 | 3 | 5.00 | No | No | 0.00 | $6,617.00 | 15.11 | 6.70 | 7 |
| 2C | 2 | Siskiyou | Mt. Shasta | I-5 | 2 | 3.33 | Yes | No | 20.00 | $3,308.50 | 7.55 | 10.30 | 6 |
| 2D | 2 | Siskiyou | Dunsmuir | I-5 | 8 | 13.33 | Yes | No | 20.00 | $4,812.36 | 10.99 | 14.77 | 2 |
| 2E | 2 | Siskiyou | Ft. Jones | Hwy 3 | 3 | 5.00 | No | No | 0.00 | $6,617.00 | 15.11 | 6.70 | 7 |
| 2F | 2 | Siskiyou | Indian Tom Lake | US Hwy 97 | 2 | 3.33 | No | No | 0.00 | $4,411.33 | 10.07 | 4.47 | 8 |
| 2G | 2 | Siskiyou | Macdoel | US Hwy 97 | 2 | 3.33 | Yes | No | 20.00 | $6,617.00 | 15.11 | 12.81 | 3 |
| 2H | 2 | Modoc | Hannchen | Hwy 139 | 3 | 5.00 | Yes | No | 20.00 | $3,308.50 | 7.55 | 10.85 | 5 |
| 2I | 2 | Modoc | Hannchen | Hwy 139 | 2 | 3.33 | Yes | No | 20.00 | $4,411.33 | 10.07 | 11.14 | 4 |
| | | | | | | | | | | | | | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Mule deer car-casses (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Mule deer carcasses ($/mi/yr) | Score | Score | Rank |
| | 3 | Insufficient data | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 4A | 4 | San Mateo | Highlands-Baywood Park | Hwy 92 | 16 | 37.21 | Yes | No | 20.00 | $6,227.76 | 22.57 | 26.59 | 2 |
| 4B | 4 | Santa Clara | Los Altos Hills | I-280 | 9 | 20.93 | Yes | No | 20.00 | $2,835.86 | 10.28 | 17.07 | 3 |
| 4C | 4 | Alameda | Mission San Jose | I-680 | 4 | 9.30 | Yes | No | 20.00 | $5,293.60 | 19.19 | 16.16 | 4 |
| 4D | 4 | Contra Costa | Orinda | Hwy 24 | 8 | 18.60 | Yes | Yes | 40.00 | $6,617.00 | 23.98 | 27.53 | 1 |
| 4E | 4 | Contra Costa | Alamo | I-680 | 6 | 13.95 | No | No | 0.00 | $6,617.00 | 23.98 | 12.65 | 5 |
| | | | | | | | | | | | | | |
| | 5 | Insufficient data | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 6A | 6 | Madera | Oakhurst | Hwy 41 | 28 | 71.79 | No | No | 0.00 | $940.49 | 16.97 | 29.59 | 2 |
| 6B | 6 | Tuolumne | Three Rivers | Hwy 198 | 2 | 5.13 | No | No | 0.00 | $2,646.80 | 47.76 | 17.63 | 3 |
| 6C | 6 | Tuolumne | Three Rivers | Hwy 198 | 5 | 12.82 | Yes | No | 100.00 | $751.93 | 13.57 | 42.13 | 1 |
| 6D | 6 | Kern | Alta Sierra | Hwy 155 | 4 | 10.26 | No | No | 0.00 | $1,203.09 | 21.71 | 10.65 | 4 |
| | | | | | | | | | | | | | |
| | 7 | Insufficient data | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | 8 | Insufficient data | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 9A | 9 | Mono | Topaz Lake | US Hwy 395 | 19 | 5.16 | No | No | 0.00 | $5,466.22 | 18.67 | 7.94 | 6 |
| 9B | 9 | Mono | Walker | US Hwy 395 | 81 | 22.01 | Yes | No | 20.00 | $6,305.61 | 21.53 | 21.18 | 3 |
| 9C | 9 | Mono | Walker | US Hwy 395 | 8 | 2.17 | Yes | No | 20.00 | $2,205.67 | 7.53 | 9.90 | 5 |
| 9D | 9 | Mono | Sonora Junction | US Hwy 395 | 103 | 27.99 | Yes | No | 20.00 | $6,140.10 | 20.97 | 22.99 | 2 |
| 9E | 9 | Mono | Mono City | US Hwy 395 | 39 | 10.60 | Yes | No | 20.00 | $4,162.31 | 14.21 | 14.94 | 4 |
| 9F | 9 | Mono | Whitmore Hot Springs | US Hwy 395 | 118 | 32.07 | Yes | No | 20.00 | $5,005.17 | 17.09 | 23.05 | 1 |
| | | | | | | | | | | | | | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Human safety | | Biological conservation | | | Economics | | Total | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Mule deer car-casses (n) | Score | Essential Habitat Connectivity | Critical Habitat USFWS | Score | Mule deer carcasses ($/mi/yr) | Score | Score | Rank |
| 10A | 10 | Amador | Pine Grove | Hwy 88 | 587 | 52.60 | Yes | No | 50.00 | $17,186.63 | 28.85 | 43.82 | 1 |
| 10B | 10 | Amador | Jackson | Hwy 49 | 80 | 7.17 | Yes | No | 50.00 | $9,126.90 | 15.32 | 24.16 | 2 |
| 10C | 10 | Tuolumne | Mono Vista | Hwy 108 | 222 | 19.89 | No | No | 0.00 | $9,538.79 | 16.01 | 11.97 | 3 |
| 10D | 10 | Tuolumne | Moccasin | Hwy 120 | 43 | 3.85 | No | No | 0.00 | $9,484.37 | 15.92 | 6.59 | 4 |
| 10E | 10 | Tuolumne | Groveland | Hwy 120 | 81 | 7.26 | No | No | 0.00 | $5,009.13 | 8.41 | 5.22 | 5 |
| 10F | 10 | Mariposa | Bootjack | Hwy 49 | 83 | 7.44 | No | No | 0.00 | $4,654.33 | 7.81 | 5.08 | 6 |
| 10G | 10 | Mariposa | Bootjack | Hwy 49 | 20 | 1.79 | No | No | 0.00 | $4,563.45 | 7.66 | 3.15 | 7 |
| | | | | | | | | | | | | | |
| | 11 | Insufficient data | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| 12A | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 10 | 27.78 | No | No | 0.00 | $3,676.11 | 19.12 | 15.63 | 4 |
| 12B | 12 | Orange | Las Flores | Hwy 241 | 5 | 13.89 | No | No | 0.00 | $1,654.25 | 8.60 | 7.50 | 5 |
| 12C | 12 | Orange | San Joaquin Hills | Hwy 73 | 15 | 41.67 | Yes | No | 25.00 | $3,970.20 | 20.65 | 29.11 | 1 |
| 12D | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 3 | 8.33 | Yes | No | 25.00 | $4,962.75 | 25.81 | 19.72 | 3 |
| 12E | 12 | Orange | Rancho Mission Viejo | Hwy 74 | 3 | 8.33 | Yes | Yes | 50.00 | $4,962.75 | 25.81 | 28.05 | 2 |

The threatened or endangered species that had critical habitat in or adjacent to the hot spots are listed in Table 18. The species include a fish species, amphibians (frog and toad species), reptiles (a snake species), a butterfly species, and several bird species.

**Table 18: The ranking of the hot spots based on analyses for mule deer carcasses per Caltrans district.**

| Hot spot ID# | District | County | Nearby town | Highway | Species 1 | Species 2 |
|---|---|---|---|---|---|---|
| *Statewide deer-vehicle crashes* | | | | | | |
| 2 | 1 | Humboldt | Orick | US Hwy 101 | Marbled murrelet | Tidewater goby |
| *Per district deer-vehicle crashes* | | | | | | |
| 1b | 1 | Humboldt | Orick | US Hwy 101 | Marbled murrelet | Tidewater goby |
| 1d | 1 | Humboldt | Redway | US Hwy 101 | Marbled murrelet | |
| 4c | 4 | San Mateo | Highlands-Baywood Park | I-280 | Bay checkerspot butterfly | California red-legged frog |
| 4d | 4 | San Mateo | Woodside | I-280 | Bay checkerspot butterfly | California red-legged frog |
| 4h | 4 | Contra Costa | Orinda | Hwy 24 | Alameda whipsnake (=striped racer) | |
| 7d | 7 | Ventura | Casitas Springs | Hwy 33 | Southwestern willow flycatcher | |
| 7e | 7 | Ventura | Moorpark | Hwy 118 | Coastal California gnatcatcher | |
| 8a | 8 | San Bernardino | Crestline | Hwy 18 | | |
| 8b | 8 | San Bernardino | Silverwood Lake | Hwy 138 | Arroyo (=arroyo southwestern) toad | |
| 11a | 11 | San Diego | Warner Springs | Hwy 79 | Arroyo (=arroyo southwestern) toad | |
| *Per district mule deer carcasses* | | | | | | |
| 1A | 1 | Humboldt | Eureka | US Hwy 101 | Tidewater goby | |
| 1B | 1 | Humboldt | Fortuna | US Hwy 101 | Western snowy plover | Yellow-billed Cuckoo |
| 4D | 4 | Contra Costa | Orinda | Hwy 24 | Alameda whipsnake (=striped racer) | |
| 12E | 12 | Orange | Rancho Mission Viejo | Hwy 74 | Arroyo (=arroyo southwestern) toad | |

## 5.4. Discussion

While the deer-vehicle crash and mule deer carcass hot spots were ranked based on human safety, biological conservation, and economic parameters, it is important to remember that the human safety parameters were the departure point for these analyses. This means that the hot spots, by definition, had a relatively high number and concentration of deer-vehicle crashes or mule deer carcasses. In other words, it was not possible for a road section that bisects an area of very high biodiversity or very high importance to biological conservation in general, but that had no or only few collisions with deer or mule deer to be identified as a hot spot, let alone receive a high ranking. It was only in the ranking process of these deer-vehicle crash and mule deer carcass hot spots that human safety, biological conservation, and economic parameters had equal weight. In this chapter the tables contain the data for each parameter and parameter group. This allows Caltrans and others to change parameter selections and add potential weight to certain parameters later, should they choose to do so.

Only some of the hot spots met or exceed the economic thresholds from Table 14. However, the values of the economic parameter for the different hot spots should not be compared to the thresholds as if it was a litmus test for implementing or not implementing mitigation measures. The thresholds are primarily based on human safety parameters and exclude passive values associated with biological conservation; they are very conservative by nature. In addition, the economic costs of wildlife-vehicle collisions and the economic benefits of mitigation measures change in time and vary by location.

Note that the economic thresholds in Table 14 are based on a four-lane divided highway (Huijser et al., 2009). However, many of the hot spots are along two-lane highways. If mitigation measures are put in place without widening the road then the thresholds are likely lower than projected in this chapter; there are likely more and longer road sections where the costs associated with wildlife-vehicle collisions meet or exceed the thresholds. If the road is completely reconstructed and widened to four-lanes at the same the mitigation measures are installed there can be overall cost savings, but the costs for the crossing structures will increase compared to those for a two-lane road. Furthermore, there may be cost savings if existing structures originally built for other purposes can be modified so that they are also suitable for wildlife use.

With the consideration of mitigation measures, it is also important to note that the crash and carcass counts are minimum numbers rather than the actual number of deer-vehicle crashes or mule deer carcass counts, and we know based on Chapter 3 that the mule deer carcass counts are severely underreported in all Caltrans districts, except for District 10. While the researchers strongly advise to use the cost-benefit analyses as an important decision support tool, they also urge users to recognize that these analyses are only one of the factors that may or should be considered in the decision-making process. For example, if there are also threatened or endangered species present that would benefit from the mitigation measures (in addition to only mule deer), costs associated with species recovery may be reduced (Personal comment John Cleckler, Caltrans District 4 Liaison, U.S. Fish and Wildlife Service).

# 6. MITIGATION RECOMMENDATIONS

## 6.1. Introduction to Effective Mitigation Measures

This chapter contains descriptions of potential mitigation measures at the crash and carcass hot spots, should Caltrans or other stakeholders choose to implement mitigation measures. The approach presented in this chapter is limited to mitigation, rather than also including options for avoidance and compensation (see Chapter 2). For this project, the approach is also restricted to mitigation measures aimed at:

- Improving human safety and reducing direct wildlife mortality through reducing deer-vehicle collisions or collisions with other large mammals or large ungulates.
- Keeping the highways permeable or making them more permeable to wildlife in general despite the presence of the highway, traffic and potential mitigation measures aimed at keeping deer off the road (e.g. wildlife fencing).

There are many publications that include an overview of mitigation measures aimed at reducing collisions with large mammals and at providing safe crossing opportunities for wildlife (see e.g. Huijser et al., 2008; Clevenger & Huijser, 2011). We refer to these publications for a general overview of the effectiveness or lack of effectiveness of dozens of different types and combinations of mitigation measures. However, there are only two types of mitigation packages that can substantially reduce collisions with large wild mammals (Table 19):

1. Wildlife fences in combination with wildlife crossing structures (underpasses or overpasses)
2. Animal detection systems, either as a stand-alone measure or at a gap in the fence.

However, while wildlife crossing structures allow for safe crossing opportunities to the other side of the highway, animal detection systems do not make it any easier for animals to cross a road (Huijser et al., 2015b; Table 19). To get to the other side of the highway, animals still must cross an open area with unnatural substrate and avoid the vehicles that drive on the road. Therefore, animal detection systems should only be considered if reducing collisions with large mammals is the only objective, and they should not be considered if providing safe crossing opportunities and increasing habitat connectivity is also an objective. Alternatively, animal detection systems are a temporary measure to reduce collisions with large mammals until a highway needs reconstruction because the road is at the end of its life span or because the highway has become so busy that road reconstruction and road widening is required.

**Table 19: Comparison of fences, fences in combination with wildlife crossing structures, and animal detection systems.**

| Parameter | Fences | Fences and wildlife crossing structures | Animal detection systems (stand-alone or at gap in fence) |
|---|---|---|---|
| Substantial collision reduction (>80%) with large mammals. | Yes (80-100%) if the measures are designed for the target species, correctly installed, and maintained (Huijser et al., 2016a). | Yes (80-100%) if the measures are designed for the target species, correctly installed, and maintained (Huijser et al., 2016a). | Possibly (33-97%) but many animal detection systems are not reliable in detecting the target species, or do not result in substantial (>80%) collision reduction (Huijser et al., 2015b). |
| Maintain or improve habitat connectivity for a wide range of species (large mammals, small and medium sized mammals, reptiles, amphibians). | No, fences alone result in a (near) absolute barrier, at least for the target species, and no safe crossing opportunities are provided for any species. | Yes, if the structures are in the correct locations for the target species, if the type and dimensions match the requirements of the target species, wildlife use can be high, and if the structures are sufficiently close, connectivity can be improved compared to an unmitigated highway (Clevenger et al., 2009; Huijser et al., 2016b) | No, animal detection systems warn drivers about the presence of large mammals on or near the highway, but these systems do not make it any easier for animals to cross a road (Huijser et al., 2015b). |
| Indicative costs | $155,000 per mile road length with fences on both sides (Huijser et al., 2009) | $155,000 per mile road length with fences on both sides; $500,000 for a large mammal underpass; $5,000,000 for an overpass (Huijser et al., 2009). | Highly variable (e.g. $65,000-$333,000 per mile road length), depending on the technology topography, curvature, and access roads (Huijser et al., 2009; Pers. comm. Deb Wambach, Montana Department of Transportation). However, because the life span of technological equipment is much shorter (e.g. 10 yrs) than for fences (20-25 yrs) and concrete structures (75-80 yrs), the life cycle costs of detection systems may be higher than for fences in combination with crossing structures. |
| Application | All roads, but access roads, driveways and other access points require attention. | All roads, but access roads, driveways and other access points require attention. In addition, easements may be required to ensure the habitat quality at both sides of wildlife crossing structures. | Lower volume roads only because of the potential for sudden stops and rear-end collisions (do not use on roads with >15,000 vehicles per day, perhaps <5,000 vehicles per day is most acceptable). |
| Risk assessment | Fence designs for large mammals as well as many small animal species groups are well established. Fence system projects should be regarded as low risk. | Fence designs for large mammals as well designs for many small animal species groups are well established. Guidelines exist for crossing structure locations, structure type, dimensions, and spacing. Fence and crossing structure projects should be regarded as low to moderate risk. | While some animal detection systems are reliable in detecting large mammals and effective in reducing collisions, many systems are removed after a few years, because of technical problems, management or financial problems, or insufficient resources for maintenance (Huijser et al., 2015b). Animal detection system projects should be regarded as high risk. |

## 6.2. Practical Guidelines for Wildlife Fences

Wildlife fences reduce collisions with large mammals by 80-100% as long as (Huijser et al., 2015a; 2016):

- The fences are designed for the target species' ability to jump, climb, and dig, as well as their strength.
- There is expert oversight during the construction of the fences, especially when the terrain is uneven, if the fences cross streams or other water bodies, and where the fences connect to wildlife underpasses or overpasses.
- There is a fence inspection and fence maintenance program in place.
- Fences are constructed over relatively long distances so that potential fence end effects are diluted, and the fences reach their full potential in reducing collisions. The fences need to cover the length of the hot spot, as well as buffer zones adjacent to the hot spot, but the habitat and topography of a specific mitigation site is also important to consider. In general, for large mammals such as deer, fences along road sections that are at least 3 miles (5 km) long almost always reduce collisions with large wild mammals by at least 80%.

For large ungulates in North America, 8 ft (2.4 m) high mesh wire fencing with wooden posts is the most frequently used fence type to keep animal species such as white-tailed deer, mule deer, elk, and moose off the road (Huijser et al., 2015a). For species that can climb a fence with large meshes or wooden posts (e.g. black bears, mountain lions), smaller mesh sizes, metal posts, and overhangs at the top of the fence are sometimes used. To discourage animals from digging under the fence (e.g. coyotes) sometimes dig barriers are installed (Huijser et al., 2008; Clevenger & Huijser, 2011; Huijser et al., 2015a). Should other species groups such as amphibians and reptiles be a concern as well, there are specialized amphibian and reptile fences (including plastic sheets) available that can be attached to a standard ungulate fence.

Wildlife fencing is most effective if implemented over relatively long distances (e.g. at least 5 km (3.1 miles)) (Huijser et al., 2016). If no or relatively short fencing is provided, animals that approach the road section at or near the safe crossing opportunity may simply walk to the fence end and cross at grade. This means that relatively short sections of wildlife fencing (e.g. less than 5 km (3.1 miles) are, on average, less effective and more variable in reducing wildlife-vehicle collisions than long sections of wildlife fencing (e.g. at least 5 km (3.1 miles long)) (e.g. Huijser et al., 2016). Short sections of wildlife fencing may partially relocate wildlife-vehicle collisions rather than substantially (>80% reduction) reduce them.

The wildlife fencing should at a minimum cover the full length of a hot spot on both sides of the road. However, if the fence ends at the end of a road section that has been identified as a hot spot, a substantial portion of the animals that would have crossed at the hot spot barely have to go out of their way to cross at-grade at one of the two fence ends rather than through a safe crossing opportunity in the mitigated hot spot. This may then result in a slight shift in the location of a hot spot rather than a real and substantial reduction in wildlife-vehicle collisions. Therefore, a buffer zone is recommended with additional fences extending from the two ends of a hot spot. The wildlife fences continue in this buffer zone and make it more energetically expensive ("costly") for the animals to walk to a fence end and cross at grade.

The length of the buffer zone can be based on the home range size of the target species. The average diameter of the home range of a mule deer may be about 2,400 m (1.49 mi) (see section 6.4). Therefore, if a mule deer would have the center of its home range at the edge of a hot spot, it may still easily travel 1,200 m (0.75 mile), suggesting that the buffer zone for mule deer should extend at least 1,200 m (0.75 mile) from the end of a hot spot. The authors of this report suggest a buffer zone of about 1,600 m (1.0 mile) extending from both ends of a hot spot.

In multifunctional landscapes, there are typically side roads, driveways and other access points from the highway. Depending on the type of access, the frequency of use by humans, and the target species, gates, wildlife guards (similar to cattle guards), electric mats or conductive concrete can help keep the target species out of the fenced road corridor at access points and at fence ends (Huijser et al., 2015a). Nonetheless, it is always possible that animals end up inside the fenced road corridor. Therefore, escape opportunities should be provided. Wildlife jump-outs or escape ramps allow wildlife that is trapped in the fenced road corridor to walk up to the height of the fence and then jump down to the safe side of the fence. The optimal jump-out height for mule deer is probably around 1.5-1.6 m (5-6 ft). Adding a horizontal bar at the top of the jump-out may help make it more difficult for animals to use the jump-out to enter the fenced road corridor.

While fences can be very effective in reducing collisions with large wild mammals, it is considered bad practice to increase the barrier effect of roads and traffic for wildlife without also providing for effective safe crossing opportunities. Safe crossing opportunities should be located in the actual hot spot, but if there is additional information of relatively large numbers of animals that cross the road successfully in the buffer zone, additional safe crossing opportunities may need to be considered in the buffer zone as well.

## 6.3. Practical Guidelines for Animal Detection Systems

At relatively low traffic volumes (e.g. < 3,000 vehicles/day) one may consider animal detection systems or gaps in a wildlife fence, with or without an animal detection system as a measure to reduce collisions with large wild mammals. However, at-grade crossing opportunities are not necessarily “safe” as it still puts wildlife on the same surface as the vehicles. In addition, the barrier effect of the transportation corridor is not reduced by providing at-grade crossing opportunities (review in Huijser et al., 2015b). Nonetheless, should these at-grade crossing opportunities be implemented, advisory or mandatory speed limit reduction and traffic calming measures (e.g. speed bumps or bulb outs), and measures that encourage the animals to cross the road straight (e.g. wildlife guards or electric mats or conductive concrete embedded in the road on either end of the gap) may be important to achieving a substantial reduction in large mammal-vehicle collisions. Animal detection systems may also be used at gaps in fences, but these systems are still mostly experimental rather than a robust mitigation measure that can be expected to function as intended immediately after installation. Animal detection systems can also be implemented as a stand-alone mitigation measure and can also substantially reduce collisions with large mammals (range 33-97%) (Huijser et al., 2015b). Note that while animal detection systems can substantially reduce collisions with large mammals, they do not make it any easier for animals to cross a road (Huijser et al., 2015b). To get to the other side of the

highway, animals still must cross an open area with unnatural substrate and avoid the vehicles that drive on the road. Therefore, animal detection systems should only be considered if reducing collisions with large mammals is the only objective, and they should not be considered for small species such as amphibians and reptiles, or if providing safe crossing opportunities and increasing habitat connectivity is also an objective.

## 6.4. Practical Guidelines for Wildlife Crossing Structures

For relatively high traffic volume (>15,000 vehicles/day) a physical separation of vehicles and wildlife is almost always desirable. As it is, high-volume highways are a near absolute barrier to many species even without fences. The permeability of a highway decreases exponentially with increasing traffic volume; animals become more and more reluctant to cross the highway (Dodd et al., 2007). With high traffic volumes, even if there would be at-grade crossing opportunities at gaps in the fences, they would likely not or barely be used.

Safe crossing opportunities require a physical separation of vehicles and wildlife. This can be achieved by providing wildlife crossing structures (i.e. underpasses and overpasses) (Clevenger & Huijser, 2011). The combination of wildlife fences and wildlife crossing structures is the most effective and robust mitigation measure package available that can achieve the two objectives of improving human safety and reducing direct wildlife mortality, and keeping highways permeable or making them more permeable to wildlife. Besides keeping animals off the highway, fences can also funnel wildlife movements to wildlife crossing structures (Dodd et al., 2007; Gagnon et al., 2010).

These wildlife crossing structures should be carefully planned, designed, and placed. In general, wildlife crossing structures should be:

- Designed with the target species in mind (type, dimensions).
- Located where the target species are willing to come close to the highway.
- Spaced “sufficiently” close together (not exceed a certain distance between crossing structures).

The authors of this report distinguished seven different types of safe crossing opportunities for potential implementation on and along the roads in the study area (Table 20). Note that there are other types of crossing structures (e.g. for amphibians), but these are not included in this report because this report primarily focuses on large mammals and most amphibians and reptiles (e.g., snakes) are also able to pass through a standard ungulate fence. Nonetheless, should amphibian or reptile crossings be installed, specific precast products are available that allow for soil and air temperature and humidity inside the tunnels that is similar to outside the tunnels. Furthermore, structures that are suitable for large terrestrial mammals can also be made suitable for amphibians and reptiles by providing suitable habitat, including cover and water or wet areas.

Similarly, aquatic or semi-aquatic species are likely to use a crossing opportunity if a wildlife underpass is located at a stream or river crossing. Stream characteristics and stream dynamics must be carefully evaluated to ensure that the conditions inside the crossing structure are and

remain similar to that of the stream up- and downstream of the structure. Such parameters include water velocity, variability in water velocity, erosion of substrate inside the crossing structure, or up- and downstream of the structure, and the implications of high and low water events, including debris and potential maintenance issues.

If terrestrial animals are to use underpasses associated with streams and rivers, a minimum path width of 0.5 m (1.6 ft) is recommended for small and medium mammals, and 2-3 m (6.6-9.8 ft) for large mammals (for both two lane and four lane highways) (Clevenger & Huijser, 2011). Furthermore, small mammals, amphibians and reptiles increase their use of wildlife underpasses and overpasses if cover (e.g. tree stumps, branches and rocks) is provided for continuous travel to the other side of the highway. One may choose to provide additional wildlife crossing structures specifically designed for the target species, as the location of stream crossings and the spacing of the structures is not necessarily consistent with the requirements of the target species.

While Table 20 classifies crossing structures based on their dimensions, there is no generally agreed upon definition of different types of crossing structures. One may also choose to modify the dimensions of an underpass based on the species of interest and the physical environment at the location of the underpass. The width (=road length) and the height of the underpasses in Table 20 (i.e. open span bridges, large mammal underpasses, medium mammal underpasses, small-medium mammal pipes) is for 2-lanes roads or two separate structures with a median in between along 4-lane roads. For one single structure along 4-lane roads, consider increasing the width and height of the underpasses.

**Table 20. Suggested classification system of wildlife crossing structures.**

| **Safe Crossing Opportunity** | **Dimensions (as seen by the animals)** | | **Safe Crossing Opportunity** | **Dimensions (as seen by the animals as they approach the crossing structure)** |
|---|---|---|---|---|
| Wildlife overpass | 50-70 m (164-230 ft) wide | | Medium mammal underpasses | 0.8-3 m (2.6-9.8 ft) wide, 0.5-2.5 m (1.6-8.2 ft) high |
| Open span bridge | 12-30 m (39-98 ft) wide, ≥5 m (16 ft) high | | Small-medium mammal pipes | 0.3-0.6 m (1.0-2.0 ft) in diameter |
| Arboreal bridge | Rope bridge connecting canopy on both sides of road | | Animal Detection system | n/a |
| Large mammal underpass | 7-8 m (23-26 ft) wide, 4-5 m (13-16 ft) high | | | |

Table 21 provides an overview of the suitability of the seven different types of safe crossing opportunities for the medium and large mammal species that are known to occur in California.

When evaluating the suitability, the authors assumed no human co-use of the crossing opportunities. The suitability of the different types of safe crossing opportunities is not only influenced by the size of the species, but also by species-specific behavior. For some species there is little or no information on what type and dimension of crossing structure is considered suitable. However, for some species the researchers can make an educated guess. For example, ringtails are known to climb trees, nest in tree cavities, suggesting that arboreal bridges are a suitable type of crossing structure for this species.

**Table 21. Suitability of different types of mitigation measures for selected species (for 2-3 lane highways [25-35 m (82-115 ft)] wide road without median).**
**● Recommended/Optimum solution; ⭘ Possible if adapted to species' specific needs; ⊗ Not recommended; ? Unknown, more data required; — Not applicable (Clevenger & Huijser, 2011; O'Brien et al., 2013; Huijser et al., preliminary data; Clevenger, unpublished data).**

| | Wildlife overpass | Arboreal crossing | Open span bridge | Large mammal underpass | Medium mammal underpass | Small-medium mammal underpass | Animal detection system |
|---|---|---|---|---|---|---|---|
| **Mammals** | | | | | | | |
| Squirrels | ● | ● | ● | ● | ⊗ | ⊗ | ⊗ |
| Porcupine | ● | ? | ● | ● | ? | ⊗ | ⊗ |
| Beaver | ⭘ | ⊗ | ● | ● | ? | ? | ⊗ |
| Opossum | ● | ● | ● | ● | ● | ● | ⊗ |
| Raccoon | ● | ⊗ | ● | ● | ● | ? | ⊗ |
| Ringtail | ● | ● | ● | ● | ⭘ | ⭘ | ⊗ |
| Skunks | ● | ⊗ | ● | ● | ● | ? | ⊗ |
| Fisher | ● | ● | ● | ⭘ | ⭘ | ⭘ | ⊗ |
| Wolverine | ● | ⊗ | ● | ? | ? | ⊗ | ⊗ |
| Badger | ● | ⊗ | ● | ● | ● | ● | ⊗ |
| Bobcat | ● | ⊗ | ● | ● | ● | ● | ⊗ |
| Mountain lion | ● | ⊗ | ● | ● | ⊗ | ⊗ | ⭘ |
| Kit fox | ● | ⊗ | ● | ● | ⭘ | ⭘ | ⊗ |
| Grey fox | ● | ⊗ | ● | ● | ● | ● | ⊗ |
| Red fox | ● | ⊗ | ● | ● | ● | ● | ⊗ |
| Coyote | ● | ⊗ | ● | ● | ● | ● | ⊗ |
| Deer spp. | ● | ⊗ | ● | ● | ⊗ | ⊗ | ● |
| Elk | ● | ⊗ | ● | ⭘ | ⊗ | ⊗ | ● |
| Pronghorn | ● | ⊗ | ? | ⊗ | ⊗ | ⊗ | ● |
| Bighorn sheep | ● | ⊗ | ● | ⭘ | ⊗ | ⊗ | ● |
| Black bear | ● | ⊗ | ● | ● | ⊗ | ⊗ | ● |
| **Amphibians** | ⭘ | ⊗ | ⭘ | ⭘ | ⭘ | ⭘ | ⊗ |
| **Reptiles** | ⭘ | ⊗ | ⭘ | ⭘ | ⭘ | ⭘ | ⊗ |

When wildlife fencing is installed alongside a road, the barrier effect of the road corridor is increased. Depending on the species concerned, a wildlife fence may be an absolute or a near complete barrier. Such barriers in the landscape are to be avoided as they isolate animal populations, and smaller and more isolated populations have reduced population survival probability. Therefore, when a wildlife fence is installed, safe crossing opportunities for wildlife should be provided for as well. This section discusses suggestions for the appropriate distance between safe crossing opportunities.

The spacing of safe crossing opportunities for wildlife can be calculated in more than one way and is dependent on the goals one may have. Examples of possible goals are:

- Provide permeability under or over the road for ecosystem processes, including but not restricted to animal movements. Ecosystem processes include not only biological processes, but also physical processes (e.g. soil processes, hydrology).
- Allowing a wide variety of species to change their spatial distribution drastically, for example in response to climate change.
- Maintaining or improving the population viability of selected species based on their current spatial distribution. This includes striving for larger populations with a certain degree of connectivity between populations (including allowing for successful dispersal movements).
- Providing the opportunity for individuals (and populations) to continue seasonal migration movements (e.g. mule deer in certain regions).
- Allowing individuals, regardless of the species, that have their home ranges on both sides of the highway to continue to use these areas. This may result in a road corridor that is permeable for wildlife, at least to a certain degree, at least for the individuals that live close to the road.

A further complication is that individuals that disperse, that display seasonal migration, or that live in the immediate vicinity of a road may display differences in behavior with regard to where and how they move through the landscape; how they respond to roads, traffic, and associated barriers (e.g. wildlife fencing); and their willingness to use safe crossing opportunities. For example, dispersing individuals may originate far away from the areas where one is used to seeing them; they may not move through habitat that we may expect them to be in; they typically travel long distances, much further and quicker compared to resident individuals; but successful dispersers may also stay away from roads and traffic and other types of human disturbance that they are unfamiliar with.

Safe crossing opportunities may not be encountered by dispersing individuals as they are new to the area and are not familiar with their location, and when confronted with a road or associated wildlife fence, they may return or change the direction of their movement before they encounter and use a safe crossing opportunity. Furthermore, if dispersing individuals do encounter a safe crossing opportunity, they may be more hesitant to use them compared to resident individuals that not only know about their location, but that also have had time to learn that it is safe to use them. Since dispersal can be a relatively rare phenomenon, one may not be able to afford a dispersing individual to give up and turn back. Knowledge on the requirements (e.g. structure

type, structure dimensions, interval between structures) for dispersing individuals versus requirements for residential individuals is currently not available.

Full-scale population viability analyses can be very helpful in comparing the effectiveness of different configurations of safe crossing opportunities. For this report the authors chose a simpler approach. Mule deer may have an average home range of about 450 hectares (ha) (1,112 acres) (diameter circular home range = 2,394 m (1.49 mile); 443 ha (1,095 acres) in summer, 500 ha (1,236 acres) in winter; Kie et al., 2002). The distance between safe crossing opportunities for mule deer was set to be equal to the diameter of the home range, about 2,400 m (1.49 mile) (Figure 20). This allows individuals that have the center of their home range on the road to have access to at least one safe crossing opportunity.

However, individuals that may have had their home range on both sides of the road do not necessarily have access to a safe crossing opportunity (Figure 21). Finally, this approach assumed homogenous habitat and distribution of the individuals and circular home ranges, while in reality habitat and habitat quality may vary greatly, causing variations in density of individuals and irregularly shaped home ranges. The authors of this report would like to emphasize that this approach does not necessarily result in viable populations for mule deer, and that not every individual that approaches the road and associated wildlife fence will encounter and use a safe crossing opportunity. Nonetheless, a suitable crossing structure for mule deer once every 2,400 m (1.49 mile) should result in "substantial connectivity" for this species.

Crossing structures that are suitable for mule deer can also be suitable or made to be suitable for many other species. For example, when a mule deer crossing structure is combined with a stream crossing, it may not only be suitable for many terrestrial animal species, but also for species that depend on aquatic or riparian habitat. Cover inside or on top of crossing structures is especially Important for small animal species (e.g. amphibians, reptiles, small mammals). Smaller species may also still be able to cross at grade as the meshes of a standard fence for large ungulates are typically wide enough for small mammals, amphibians, and snakes to pass through. If road mortality is to be reduced for smaller species too, smaller mesh fencing or smooth plastic sheets should be attached to the lower portion of a large mammal fence (see section 6.2).

Because the home range for smaller-bodied species (e.g., amphibians and reptiles) may be much smaller than for mule deer (see e.g. Huijser & Begley, 2012), additional crossing opportunities (in addition to the safe crossing opportunities for mule deer) may have to be provided (Figure 20). These crossing opportunities can typically be much smaller when designed for species smaller than deer. The approach described above is not necessarily the only approach or the approach that addresses the barrier effect of the road corridor and associated fencing sufficiently for all species concerned. However, the authors do think that this approach would at least be consistent, practical, based on available ecological data, and likely to result in considerable permeability of the road corridor and associated wildlife fencing for mule deer.

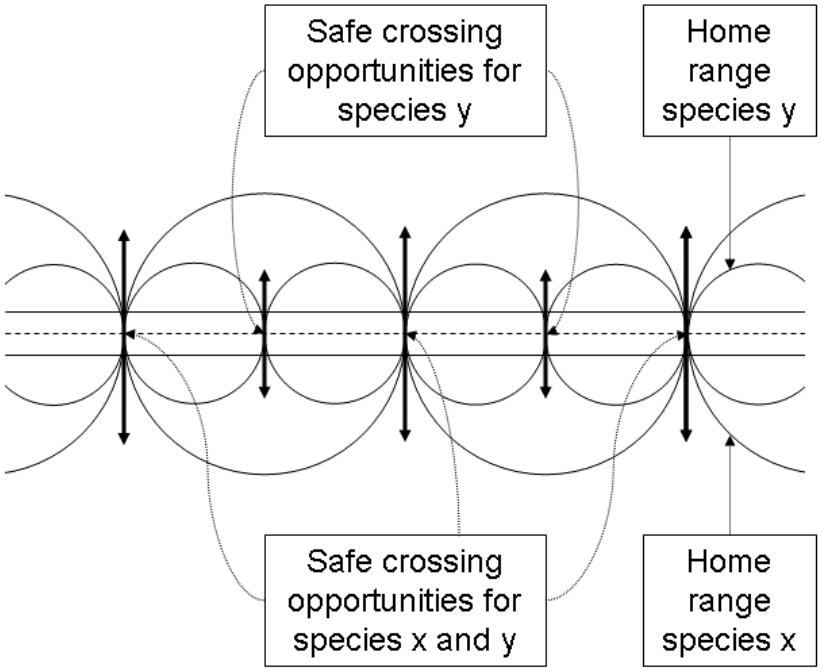



**Figure 20: Schematic representation of home ranges for two theoretical species projected on a road and the distance between safe crossing opportunities (distance is equal to the diameter of their home range).**

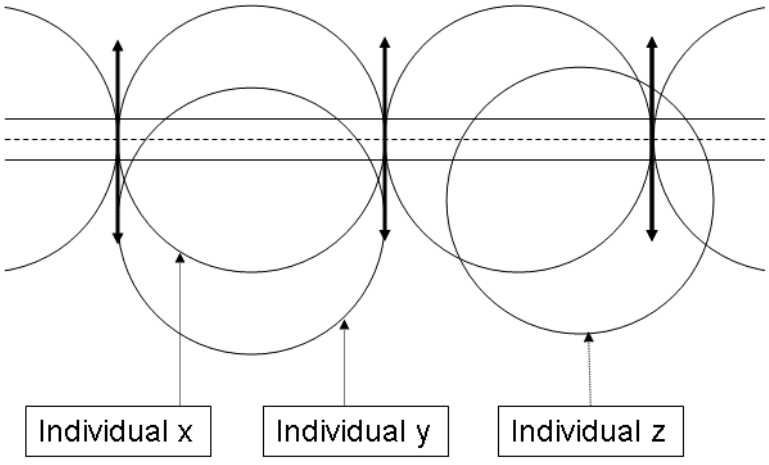



**Figure 21: Schematic representation of home ranges and interval between safe crossing opportunities. Schematic representation of home range for an individual (x) that has the center of its home range on the center of the road (access to two safe crossing opportunities), an individual (y) that has the center of its home range slightly off the center of the road exactly in between two safe crossing opportunities (no access to safe crossing opportunities), and an individual (z) that has the center of its home range slightly off the center of the road but not exactly in between two safe crossing opportunities (access to one safe crossing opportunity).**

Another way to decide on "appropriate distance" between safe crossing opportunities is to evaluate what the spacing is for wildlife crossing structures on other wildlife highway mitigation projects. The average spacing for large mammal crossing structures in Montana (US Hwy 93 North and South), I-75 in Florida, SR 260 in Arizona, Banff National Park in Canada, and ongoing reconstruction on I-90 in Washington State is about 1.9 km (1.2 mile) (range for the average spacing of structures in these individual areas is 0.8-2.9 km (0.50-1.80 mile)). However, the 1.9 km (1.2 mile) spacing is simply what people have done elsewhere, and it is not necessarily based on what may be needed ecologically, the requirements for the target species in one area may be different from what is needed in another area.

## 6.5. Mitigation Recommendations for the Top Crash and Carcass Hot Spots Per District

In Chapter 4 the researchers identified deer-vehicle crash hot spots and mule deer carcass hot spots while Chapter 5 documented the prioritization process. In this section the researchers list the recommendations for the top deer-vehicle crash and mule deer carcass hot spots in each Caltrans district. We strived for ranking the top five hot spots within each district. However, some districts had fewer hot spots (see Chapter 5). In addition, some other districts had more than five hot spots that met the criteria for hot spot identification (see Chapter 4), and the authors of this report included all hot spots in the ranking process as the authors had no way to identify which were the "worst" five without initiating the ranking process. Note that the researchers described the individual hot spots based on the Kernel density category, the length of the hot spots, the number of lanes (based on satellite images), whether potential existing structures are present that may also serve as a wildlife crossing after potential modifications (based on satellite images), and the traffic volume (Annual Average Daily Traffic (AADT; Caltrans, 2019). Small underpasses (e.g. drainage culverts or small box culverts) were not reliably visible on the satellite images. However, structures that are considered suitable for mule deer (at least 7-8 m [23-26 ft] wide, 4-5 m [13-16 ft] high) were visible on the satellite images, and that was most relevant for this project.

Should Caltrans consider implementing mitigation measures at one or more of these hot spots, the researchers advise the following:

1. Focus on hot spots with a relatively high number of collisions first. If there are less than 10 reported deer-vehicle crashes or less than 10 reported mule deer carcasses in a hot spot, implementation of mitigation measures is relatively risky compared to sites that have greater collision numbers. The identification of hot spots with low numbers is less robust than the identification of hot spots with higher numbers. The authors of this report suggest minimizing the risk of investing in mitigation measures by focusing on hot spots that are likely to be a substantial and consistent hot spot rather than a less important hot spot or a hot spot that may have been wrongly identified because of variations in the number of collisions.

2. Interview law enforcement personnel and road maintenance personnel in the first phase of exploring the potential implementation of mitigation measures. Get confirmation that

it is indeed a "bad spot" for deer-vehicle collisions, and get confirmation about the exact road section (start and end points).

3. Some hot spots appear particularly difficult or costly to mitigate. The presence of 8-12 lanes of traffic, frontage roads, intersections, private lands, residential and commercial development, etc. all make it more challenging to effectively mitigate a hot spot. These types of challenges are "ignored" in the ranking of the hot spots (Tables 22 and 23). However, the challenges of each hot spot should be carefully weighed when proceeding with the planning, design and implementation of mitigation measures.

4. Carefully evaluate what species other than mule deer may require mitigation for direct road mortality or the barrier effect along the road section that is considered for mitigation. Consult spatial and biological databases, interview representatives from natural resource management agencies, interview people with local knowledge and experience. Modify or add to the list of target species as it may well influence the design of the mitigation measures.

5. In general, the first choice or recommendation for mitigating a hot spot is a wildlife fence in combination with designated wildlife crossing structures. Implement large mammal fences (2.4 m high (8 ft)) along the full length of a hot spot and buffer zones that span an additional 1,600 m (1.0 mile) from each end of the hot spot. As a general principle, provide a crossing structure that is suitable for mule deer (at least 7-8 m (23-26 ft) wide, 4-5 m (13-16 ft) high) once every 2,400 m (1.49 mile) in the fenced road section. With reduced ambition levels (i.e., address only collisions with large mammals, do not provide safe crossing opportunities for wildlife) animal detection systems are suggested as a second choice for road sections with less than 5,000 vehicles per day (Table 22 and 23).

6. If there were existing structures in a hot spot, identified through satellite images, these were noted in the tables. However, structures primarily designed for motorized vehicles were not listed. Nonetheless, very long bridges with only small or unpaved roads were included as an existing structure that may be adapted to also allow for wildlife use. In addition to connecting these structures to wildlife fences, the structures may need some modifications to make them suitable for wildlife use. These modifications will likely vary between the structures, and some structures may not need any modifications.

7. In general, structures for mule deer should be considered about every 2,400 m (1.49 mile) (see section 6.4). This means that long hot spots may need multiple crossing structures. These structures can be any combination of existing structures originally built for other purposes and designated wildlife crossing structures. The structures listed in Table 22 and 23 are restricted to the hot spots. Fences may extend into adjacent buffer zones, and there may be additional existing structures in those areas. Tying these existing structures into the wildlife fence and allowing potential wildlife use through these structures makes sense, as long as it is compatible with the primary use of a structure and the land use in the areas surrounding the structure.

**Table 22: The mitigation recommendations for the top hot spots based on analyses for deer-vehicle crashes per Caltrans district.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Total length (mi) | Lanes (n) | Existing structure | AADT | Rank | Mitigation suggestions | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 1st choice | 2nd choice |
| 1a | 1 | Del Norte | Crescent City | US Hwy 101 | 0.6 | 2 | No | 4,450 | 2 | Fence, designated structures | ADS |
| 1b | 1 | Humboldt | Orick | US Hwy 101 | 0.8 | 2 | Yes | 4,050 | 1 | Fence, designated structures | ADS |
| 1d | 1 | Humboldt | Redway | US Hwy 101 | 0.4 | 4 | No | 8,100 | 3 | Fence, designated structures | |
| 1e | 1 | Humboldt | Redway | US Hwy 101 | 0.2 | 5 | No | 7,650 | 4 | Fence, designated structures | |
| 1f | 1 | Humboldt | Redway | US Hwy 101 | 0.1 | 4 | No | 6,850 | 5 | Fence, designated structures | |
| | | | | | | | | | | | |
| 2a | 2 | Siskiyou | Hornbrook | I-5 | 2.5 | 4 | Yes | 16,200 | 4 | Fence, modify existing 70-80 m bridge | |
| 2e | 2 | Tehama | Red Bluff | I-5 | 0.5 | 5 | Yes | 42,750 | 2 | Fence, modify existing 42 m bridge | |
| 2f | 2 | Tehama | Red Bluff | I-5 | 0.5 | 4 | Yes | 38,500 | 2 | Fence, modify existing 222 m bridge | |
| 2g | 2 | Lassen | Susanville | US Hwy 395 | 5.6 | 3 | Yes | 6,950 | 1 | Fence, upsize existing culverts and livestock underpass, designated structures | |
| 2h | 2 | Siskiyou | Black Butte | I-5 | 0.4 | 4 | No | 24,800 | 3 | Fence, designated structures | |
| | | | | | | | | | | | |
| 3a | 3 | El Dorado | Placerville | US Hwy 50 | 0.9 | 4 | No | 27,450 | 3 | Fence, designated structures | |
| 3b | 3 | El Dorado | Perks Corner | US Hwy 50 | 3.7 | 4 | Yes | 10,600 | 2 | Fence, upsize existing livestock underpass, designated structures | |
| 3c | 3 | El Dorado | Shingle Springs | US Hwy 50 | 3.4 | 6 | No | 66,200 | 4 | Fence, designated structures | |
| 3d | 3 | Sacramento | Rancho Murieta | Hwy 16 | 0.3 | 2 | No | 11,250 | 1 | Fence, designated structures | |
| 3j | 3 | Nevada | Higgins Corner | Hwy 49 | 1.4 | 2 | Yes | 23,200 | 4 | Fence, modify existing 47 m bridge | |
| | | | | | | | | | | | |
| 4c | 4 | San Mateo | Highlands-Baywood Park | I-280 | 2.2 | 10 | Yes | 129,000 | 2 | Fence, modify existing 501 m bridge | |
| 4d | 4 | San Mateo | Woodside | I-280 | 6.4 | 8 | Yes | 114,000 | 1 | Fence, modify existing 30 and 34 m bridges | |
| 4f | 4 | Santa Clara | Los Altos Hills | I-280 | 0.4 | 6 | No | 131,500 | 4 | Fence, designated structures | |
| 4g | 4 | Contra Costa | Condit | Hwy 24 | 0.2 | 8 | No | 209,500 | 5 | Fence, designated structures | |
| 4h | 4 | Contra Costa | Orinda | Hwy 24 | 0.4 | 8 | No | 188,000 | 3 | Fence, designated structures | |
| | | | | | | | | | | | |
| 5a | 5 | San Luis Obispo | Templeton | US Hwy 101 | 0.5 | 4 | Yes | 58,850 | 1 | Fence, modify existing 51 and 31 m bridges | |
| | | | | | | | | | | | |
| 6a | 6 | Madera | Oakhurst | Hwy 41 | 0.5 | 3 | No | 19,000 | 1 | Fence, designated structures | |
| 6b | 6 | Madera | Oakhurst | Hwy 41 | 0.3 | 2 | No | 19,000 | 2 | Fence, designated structures | |
| | | | | | | | | | | | |
| 7a | 7 | Los Angeles | Glendale | Hwy 134 | 0.4 | 8 | No | 209,500 | 4 | Fence, designated structures | |
| 7b | 7 | Los Angeles | Glendale | Hwy 2 | 2.8 | 9 | No | 124,500 | 3 | Fence, designated structures | |
| 7c | 7 | Los Angeles | Sherman Oaks | I-405 | 0.4 | 12 | No | 253,500 | 5 | Fence, designated structures | |
| 7d | 7 | Ventura | Casitas Springs | Hwy 33 | 0.4 | 3 | No | 26,500 | 2 | Fence, designated structures | |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Total length (mi) | Lanes (n) | Existing structure | AADT | Rank | Mitigation suggestions | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 1st choice | 2nd choice |
| 7e | 7 | Ventura | Moorpark | Hwy 118 | 0.2 | 5 | No | 79,500 | 1 | Fence, designated structures | |
| | | | | | | | | | | | |
| 8a | 8 | San Bernardino | Crestline | Hwy 18 | 1.1 | 4 | No | 16,550 | 4 | Fence, designated structures | |
| 8b | 8 | San Bernardino | Silverwood Lake | Hwy 138 | 0.2 | 2 | No | 2,925 | 2 | Fence, designated structures | ADS |
| 8c | 8 | San Bernardino | Running Springs | Hwy 330 | 2.6 | 2 | No | 11,500 | 1 | Fence, designated structures | |
| 8d | 8 | San Bernardino | Running Springs | Hwy 18 | 0.4 | 2 | No | 5,750 | 3 | Fence, designated structures | |
| 8e | 8 | San Bernardino | Skyforest | Hwy 18 | 0.2 | 2 | No | 5,750 | 5 | Fence, designated structures | |
| | | | | | | | | | | | |
| 9a | 9 | Mono | Bridgeport | US Hwy 395 | 1 | 2 | No | 3,050 | 1 | Fence, designated structures | |
| 9b | 9 | Mono | Whitmore Hot Spr. | US Hwy 395 | 0.7 | 4 | No | 7,250 | 2 | Fence, upsize existing culvert | |
| 9c | 9 | Mono | Grant Lake | US Hwy 395 | 0.3 | 4 | No | 4,625 | 3 | Fence, designated structures | ADS |
| | | | | | | | | | | | |
| 10a | 10 | Mariposa | Bootjack | Hwy 49 | 1.6 | 2 | Yes | 5,200 | 2 | Fence, modify existing 65 m bridge | |
| 10b | 10 | Calaveras | San Andreas | Hwy 49 | 0.3 | 2 | Yes | 7,250 | 1 | Fence, modify existing 32 m bridge | |
| | | | | | | | | | | | |
| 11a | 11 | San Diego | Warner Springs | Hwy 79 | 0.6 | 2 | No | 1,400 | 1 | Fence, designated structures | ADS |
| 11b | 11 | San Diego | Santa Ysabel | Hwy 78 | 2.8 | 2 | No | 4,425 | 2 | Fence, designated structures | ADS |
| 11c | 11 | San Diego | Lake Cuyamaca | Hwy 79 | 0.4 | 2 | No | 1,650 | 3 | Fence, designated structures | ADS |
| 11d | 11 | San Diego | La Jolla | I-5 | 0.3 | 12 | No | 174,500 | 4 | Fence, designated structures | |
| | | | | | | | | | | | |
| 12a | 12 | Orange | Las Flores | Hwy 241 | 1.6 | 4 | Yes | 6,900 | 2 | Fence, modify existing 46 m bridge | |
| 12b | 12 | Orange | Peters Cany. Res. | Hwy 261 | 0.3 | 5 | Yes | 32,200 | 3 | Fence, modify existing 68 m bridge | |
| 12c | 12 | Orange | Villa Park | Hwy 241 | 0.3 | 9 | No | 47,800 | 3 | Fence, designated structures | |
| 12d | 12 | Orange | Laguna Woods | Hwy 73 | 0.2 | 7 | No | 62,700 | 1 | Fence, designated structures | |

**Table 23: The mitigation recommendations for the top hot spots based on analyses for mule deer carcasses per Caltrans district.**

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Total length (mi) | Lanes (n) | Existing structure | AADT | Rank | Mitigation | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 1st choice | 2nd choice |
| 1A | 1 | Humboldt | Eureka | US Hwy 101 | 2.3 | 4 | yes | 24150 | 1 | Fence, upgrade culvert, designated structures | |
| 1B | 1 | Humboldt | Fortuna | US Hwy 101 | 4.0 | 4 | yes | 24000 | 2 | Fence, modify existing 139 m bridge | |
| 1F | 1 | Mendocino | Little River | Hwy 1 | 0.4 | 2 | Yes | 3750 | 4 | Fence, modify existing 21 m bridge | ADS |
| 1I | 1 | Lake | Blue Lakes | Hwy 20 | 0.2 | 2 | No | 9650 | 3 | Fence, designated structures | |
| 1K | 1 | Lake | Clearlake Oaks | Hwy 20 | 0.8 | 2 | No | 8150 | 5 | Fence, designated structures | |
| | | | | | | | | | | | |
| 2A | 2 | Siskiyou | Yreka | I-5 | 6.3 | 4 | Yes | 19000 | 1 | Fence, upsize existing culverts and livestock underpass, designated structures | |
| 2D | 2 | Siskiyou | Dunsmuir | I-5 | 1.1 | 4 | No | 20350 | 2 | Fence, designated structures | |
| 2G | 2 | Siskiyou | Macdoel | US Hwy 97 | 0.2 | 2 | No | 1190 | 3 | Fence, designated structures | ADS |
| 2H | 2 | Modoc | Hannchen | Hwy 139 | 0.6 | 2 | No | 1625 | 5 | Fence, designated structures | ADS |
| 2I | 2 | Modoc | Hannchen | Hwy 139 | 0.3 | 2 | No | 1625 | 4 | Fence, designated structures | ADS |
| | | | | | | | | | | | |
| | 3 | Insufficient data | | | | | | | | | |
| | | | | | | | | | | | |
| 4A | 4 | San Mateo | Highlands-Baywood Park | Hwy 92 | 1.7 | 4 | No | 77200 | 2 | Fence, designated structures | |
| 4B | 4 | Santa Clara | Los Altos Hills | I-280 | 2.1 | 8 | No | 131500 | 3 | Fence, designated structures | |
| 4C | 4 | Alameda | Mission San Jose | I-680 | 0.5 | 6 | No | 155400 | 4 | Fence, designated structures | |
| 4D | 4 | Contra Costa | Orinda | Hwy 24 | 0.8 | 8 | No | 188000 | 1 | Fence, designated structures | |
| 4E | 4 | Contra Costa | Alamo | I-680 | 0.6 | 6 | No | 153850 | 5 | Fence, designated structures | |
| | | | | | | | | | | | |
| | 5 | Insufficient data | | | | | | | | | |
| | | | | | | | | | | | |
| 6A | 6 | Madera | Oakhurst | Hwy 41 | 19.7 | 2 | No | 19000 | 2 | Fence, designated structures | |
| 6B | 6 | Tuolumne | Three Rivers | Hwy 198 | 0.5 | 2 | Yes | 4525 | 3 | Fence, modify existing 60 m bridge | ADS |
| 6C | 6 | Tuolumne | Three Rivers | Hwy 198 | 4.4 | 2 | Yes | 3175 | 1 | Fence, modify existing 61 m bridge, designated structures | ADS |
| 6D | 6 | Kern | Alta Sierra | Hwy 155 | 2.2 | 2 | No | 355 | 4 | Fence, designated structures | ADS |
| | | | | | | | | | | | |
| | 7 | Insufficient data | | | | | | | | | |
| | | | | | | | | | | | |
| | 8 | Insufficient data | | | | | | | | | |
| | | | | | | | | | | | |
| 9B | 9 | Mono | Walker | US Hwy 395 | 8.5 | 2 | Yes | 3550 | 3 | Fence, upsize existing culverts, designated structures | ADS |
| 9C | 9 | Mono | Walker | US Hwy 395 | 2.4 | 2 | No | 3425 | 5 | Fence, designated structures | ADS |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Total length (mi) | Lanes (n) | Existing structure | AADT | Rank | Mitigation | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | 1st choice | 2nd choice |
| 9D | 9 | Mono | Sonora Junction | US Hwy 395 | 11.1 | 2 | Yes | 3425 | 2 | Fence, modify existing bridge 41 m, upsize existing culverts, designated structures | ADS |
| 9E | 9 | Mono | Mono City | US Hwy 395 | 6.2 | 4 | Yes | 3350 | 4 | Fence, upsize existing culverts, designated structures | ADS |
| 9F | 9 | Mono | Whitmore Hot Springs | US Hwy 395 | 15.6 | 4 | Yes | 7200 | 1 | Fence, modify existing bridge 23 m, upsize existing culverts, designated structures | |
| | | | | | | | | | | | |
| 10A | 10 | Amador | Pine Grove | Hwy 88 | 22.6 | 2 | No | 8250 | 1 | Fence, designated structures | |
| 10B | 10 | Amador | Jackson | Hwy 49 | 5.8 | 2 | No | 8100 | 2 | Fence, designated structures | |
| 10C | 10 | Tuolumne | Mono Vista | Hwy 108 | 15.4 | 2 | Yes | 3975 | 3 | Fence, modify existing bridge 310 m, upsize existing culverts, designated structures | ADS |
| 10D | 10 | Tuolumne | Moccasin | Hwy 120 | 3.0 | 2 | Yes | 4425 | 4 | Fence, modify existing bridge 105 m, upsize existing culverts, designated structures | ADS |
| 10E | 10 | Tuolumne | Groveland | Hwy 120 | 10.7 | 2 | No | 6225 | 5 | Fence, designated structures | |
| | | | | | | | | | | | |
| | 11 | Insufficient data | | | | | | | | | |
| | | | | | | | | | | | |
| 12A | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 1.8 | 6 | Yes | 40150 | 4 | Fence, modify existing bridge 403 m, upsize existing culverts, designated structures | |
| 12B | 12 | Orange | Las Flores | Hwy 241 | 2.0 | 4 | Yes | 6900 | 5 | Fence, modify existing bridge 45 m, upsize existing culverts, designated structures | |
| 12C | 12 | Orange | San Joaquin Hills | Hwy 73 | 2.5 | 8 | Yes | 67650 | 1 | Fence, modify existing bridges 96 m, 49 m, upsize existing culverts | |
| 12D | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 0.4 | 7 | Yes | 47800 | 3 | Fence, upsize existing culverts | |
| 12E | 12 | Orange | Rancho Mission Viejo | Hwy 74 | 0.4 | 2 | No | 11100 | 2 | Fence, designated structures | |

# 7. REFERENCES

Abra F.D., B.M. Granziera, M.P. Huijser, K.M.P.M.d.B. Ferraz, C.M. Haddad, R.M. Paolino. 2019. Pay or prevent? Human safety, costs to society and legal perspectives on animal-vehicle collisions in São Paulo state, Brazil. PLoSONE 14(4):e0215152. https://doi.org/10.1371/journal.pone.0215152

Allen, R.E. & D.R. McCullough. 1976. Deer–car accidents in southern Michigan. Journal of Wildlife Management 40: 317–325.

CDFW. 2018. California's deer population estimates. California Department of Fish and Wildlife. https://www.wildlife.ca.gov/Conservation/Mammals/Deer/Population

Caltrans. 2013. Traffic manual. http://www.dot.ca.gov/hq/traffops/signtech/signdel/chp3/chap3.htm

Caltrans. 2019. Traffic Census Program. 2017 Volumes. http://www.dot.ca.gov/trafficops/census/volumes2017/

Clevenger, A.P. & M.P. Huijser. 2011. Wildlife Crossing Structure Handbook Design and Evaluation in North America. Department of Transportation, Federal Highway Administration, Washington D.C., USA. Available from the internet: http://www.westerntransportationinstitute.org/documents/reports/425259_Final_Report.pdf

Clevenger, A. P., A. T. Ford & M. A. Sawaya. 2009. Banff wildlife crossings project: Integrating science and education in restoring population connectivity across transportation corridors. Final report to Parks Canada Agency, Radium Hot Springs, British Columbia, Canada. https://arc-solutions.org/wp-content/uploads/2012/03/Clevenger-et-al-2009-Banff-wildlife-crossings-project.pdf

Conover, M.R. 1997. Monetary and intangible valuation of deer in the United States. Wildlife Society Bulletin 25: 298-305.

Conover, M.R., W.C. Pitt, K.K. Kessler, T.J. DuBow & W.A. Sanborn. 1995. Review of human injuries, illnesses, and economic losses caused by wildlife in the United States. Wildlife Society Bulletin 23: 407-414.

Cuperus, R., K.J. Canters, H.A. Udo de Haes & D.S. Friedman. 1999. Guidelines for ecological compensation associated with highways. Biological Conservation 90: 41-51.

Dodd, N.L., Gagnon, J.W., Boe, S., Schweinsburg, R.E., 2007. Role of fencing in promoting wildlife underpass use and highway permeability. In: Irwin, C.L., Nelson, D., McDermott, K.P. (Eds.), Proceedings of the 2007 International Conference on Ecology and Transportation. Center for Transportation and the Environment, North Carolina State University, Raleigh, North Carolina, USA, pp. 475–487.

Donaldson, B.M. & N.W. Lafon. 2008. Testing an integrated PDA-GPS system to collect standardized animal carcass removal data. FHWA/VTRC 08-CR10. Virginia Transportation Research Council, Charlottesville, Virginia, USA.

ESRI. 2018a. How Optimized Hot Spot Analysis Works. ArcMap 10.6. http://desktop.arcgis.com/en/arcmap/latest/tools/spatial-statistics-toolbox/how-optimized-hot-spot-analysis-works.htm

ESRI. 2018b. ArcGIS Desktop: Release 10.6.1. Redlands, CA: Environmental Systems Research Institute.

Gagnon, J.W., Dodd, N.L., Sprague, S.C., Ogren, K., Schweinsburg, R.E., 2010. Preacher Canyon wildlife fence and crosswalk enhancement project evaluation. State Route 260. Final Report - Project JPA 04-088. Arizona Game and Fish Department, Phoenix, Arizona, USA.

Gomes L., C. Grilo, C. Silva & A. Mira. 2009. Identification methods and deterministic factors of owl roadkill hotspot locations in Mediterranean landscapes. Ecological Research 24(2): 355-370.

Huijser, M.P. & J.S. Begley. 2012. Highway mitigation opportunities for wildlife in Boundary County, Idaho. 4W3883 Western Transportation Institute College of Engineering, Montana State University, P.O. Box 174250. Bozeman, MT 59717-4250, USA.

Huijser, M.P. & J.S. Begley. 2014. Procedures and tools for wildlife-vehicle collision hotspot analyses; Using Caltrans District 10 as an example. Report no. 4W4337. Western Transportation Institute – Montana State University, Bozeman, Montana, USA.

Huijser, M.P. & P.J.M. Bergers. 2000. The effect of roads and traffic on hedgehog (*Erinaceus europaeus*) populations. Biological Conservation 95: 111–116.

Huijser, M.P., J. Fuller, M.E. Wagner, A. Hardy, & A.P. Clevenger. 2007. Animal-vehicle collision data collection. A synthesis of highway practice. NCHRP Synthesis 370. Project 20-05/Topic 37-12. Transportation Research Board of the National Academies, Washington DC, USA. Available from the internet: http://www.trb.org/news/blurb_detail.asp?id=8422

Huijser, M.P., P. McGowen, J. Fuller, A. Hardy, A. Kociolek, A.P. Clevenger, D. Smith & R. Ament. 2008. Wildlife-vehicle collision reduction study. Report to Congress. U.S. Department of Transportation, Federal Highway Administration, Washington D.C., USA. Available from the internet: http://www.fhwa.dot.gov/publications/research/safety/08034/index.cfm

Huijser, M.P., J.W. Duffield, A.P. Clevenger, R.J. Ament & P.T. McGowen. 2009. Cost–benefit analyses of mitigation measures aimed at reducing collisions with large ungulates in the United States and Canada; a decision support tool. Ecology and Society 14(2): 15. Available from the internet: http://www.ecologyandsociety.org/viewissue.php?sf=41

Huijser, M.P., A.V. Kociolek, T.D.H. Allen, P. McGowen, P.C. Cramer & M. Venner. 2015a. Construction guidelines for wildlife fencing and associated escape and lateral access control measures. NCHRP Project 25-25, Task 84, National Cooperative Highway Research Program, Transportation Research Board of the National Academies, Washington D.C., USA.

Huijser, M.P., C. Mosler-Berger, M. Olsson & M. Strein. 2015b. Wildlife warning signs and animal detection systems aimed at reducing wildlife-vehicle collisions. pp. 198-212. In: R. Van der Ree, C. Grilo & D. Smith. Ecology of roads: A practitioner's guide to impacts and mitigation. John Wiley & Sons Ltd. Chichester, United Kingdom.

Huijser, M.P., E.R. Fairbank, W. Camel-Means, J. Graham, V. Watson, P. Basting & D. Becker. 2016. Effectiveness of short sections of wildlife fencing and crossing structures along highways in reducing wildlife-vehicle collisions and providing safe crossing opportunities for large mammals. Biological Conservation 197: 61-68.

Kie, J.G., R.T. Bowyer, M.C. Nicholson, B.B. Boroski & E.R. Loft. 2002. Landscape heterogeneity at differing scales: Effects on spatial distribution of mule deer. Ecology 83(2): 530-544.

O'Brien, C.J., A.B. Otto & R.A. Sweitzer. 2013. Wildlife Vehicle Collisions (WVC) Sub-group: The Sierra National Forest Highway 41 culvert Project. http://snamp.cnr.berkeley.edu/static/documents/2013/03/11/WVC_CulvertProject_CJO_RAS.pdf

Proctor, M.F. 2003. Genetic analysis of movement, dispersal and population fragmentation of grizzly bears in southwestern Canada. Dissertation. The University of Calgary, Calgary, Alberta, Canada.

Riley, S.J. & A. Marcoux. 2006. Deer–vehicle collisions: an understanding of accident characteristics and drivers' attitudes, awareness and involvement. Research report RC-1475. Department of Fisheries and Wildlife, Michigan State University, East Lansing, Michigan, USA.

Romin, L.A. & J.A. Bissonette. 1996. Deer-vehicle collisions: status of state monitoring activities and mitigation efforts. Wildlife Society Bulletin 24: 276-283.

Silverman, B.W. 1986. Density estimation for statistics and data analysis. Chapman and Hall, New York, USA.

Spencer, W.D., P. Beier, K. Penrod, K. Winters, C. Paulman, H. Rustigian-Romsos, J. Strittholt, M. Parisi & A. Pettler. 2010. California Essential Habitat Connectivity Project: A Strategy for Conserving a Connected California. Prepared for California Department of Transportation, California Department of Fish and Game, and Federal Highways Administration. Available from the internet: https://www.wildlife.ca.gov/Conservation/Planning/Connectivity/CEHC

Tardif, L.-P. & Associates Inc. 2003. Collisions involving motor vehicles and large animals in Canada. Final report. L-P Tardif and Associates Inc., Nepean, Ontario, Canada.
U.S. Fish and Wildlife Service. 2013. Critical habitat portal. http://ecos.fws.gov/crithab/

Teixeira, F.Z., A.V.P. Coelho, I.B. Esperandio & A. Kindel. 2013. Vertebrate road mortality estimates: Effects of sampling methods and carcass removal. Biological Conservation 157: 317-323.


Teixeira, F.Z., A. Kindel, S.M. Hartz, S. Mitchell & L. Fahrig. 2017. When road-kill hotspots do not indicate the best sites for road-kill mitigation. Journal of Applied Ecology 54: 1544-1551.

USFWS. 2019. U.S. Fish & Wildlife Service Threatened & Endangered Species Active Critical Habitat Report. ECOS Environmental Conservation Online System. U.S. Fish & Wildlife Service. https://ecos.fws.gov/ecp/report/table/critical-habitat.html Accessed 19 April 2019.

Van der Ree, R., C. Grilo & D. Smith (eds.). 2015. Ecology of roads: A practitioner's guide to impacts and mitigation. John Wiley & Sons Ltd. Chichester, United Kingdom.

van der Zee, F.F., J. Wiertz, C.J.F. ter Braak, R.C. van Apeldoorn & J. Vink. 1992. Landscape change as a possible cause of the badger *Meles meles* L. decline in The Netherlands. Biological Conservation 61: 17–22.

# 8. APPENDIX A: STATEWIDE ANALYSIS DEER-VEHICLE CRASH HOT SPOTS

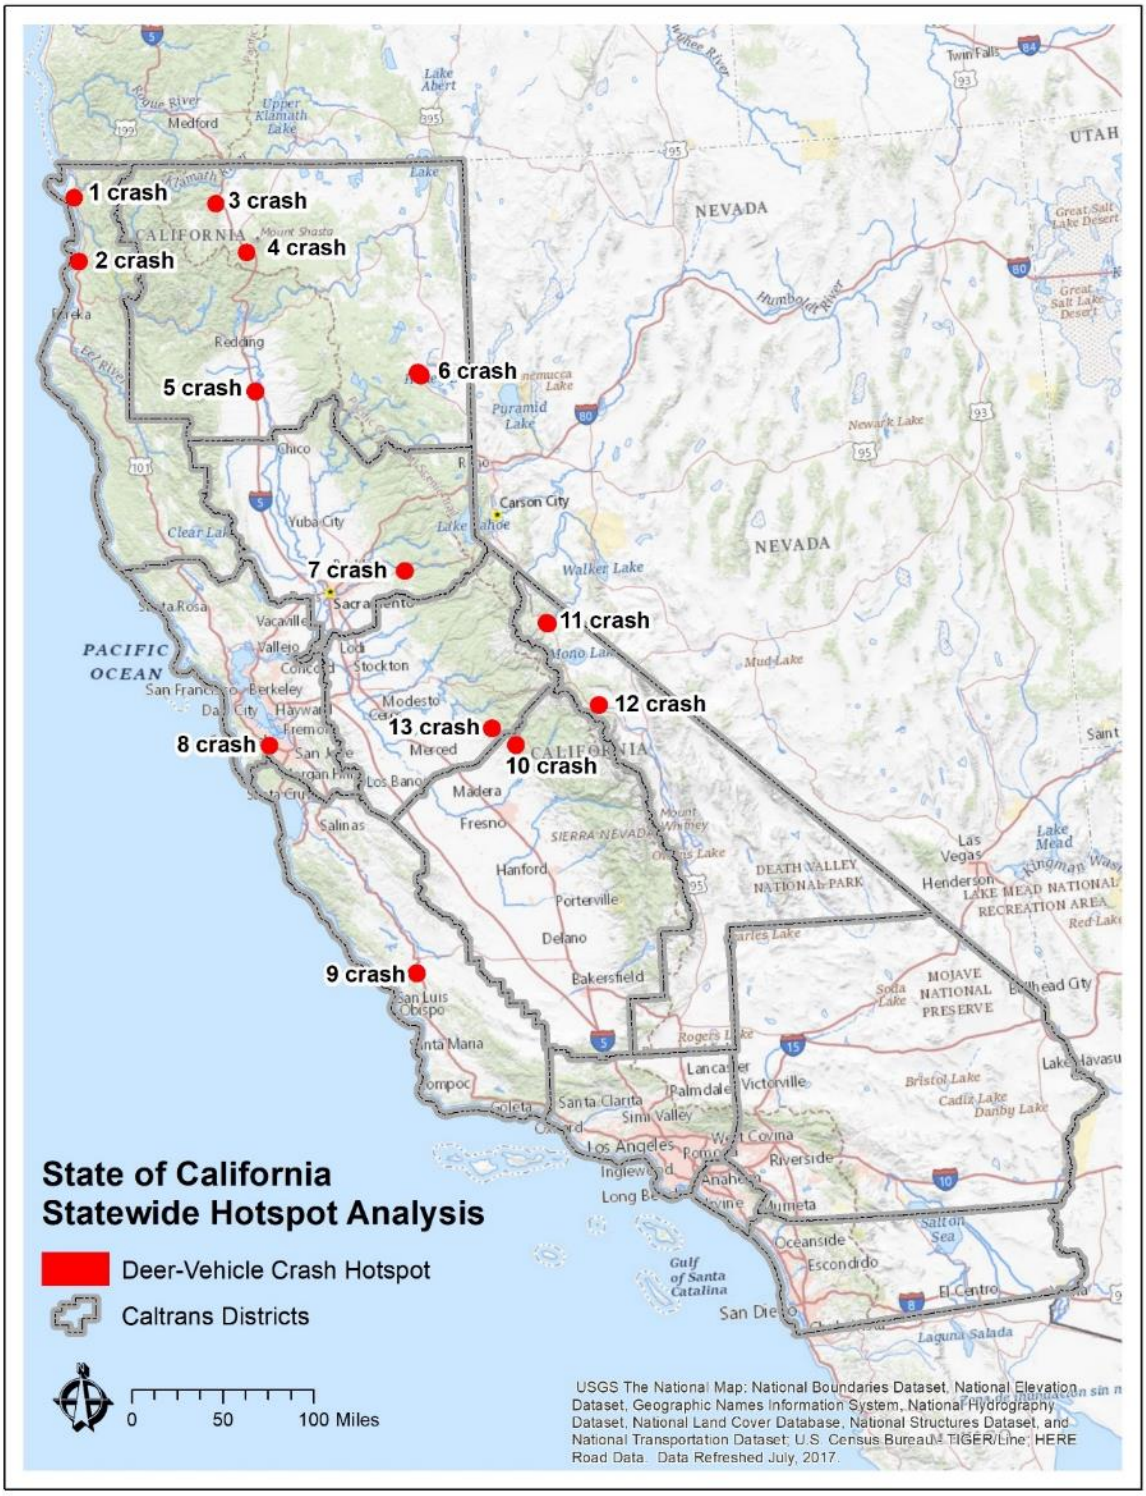



Hot spots based on statewide deer-vehicle crash data with Caltrans District boundaries (see Figure 1, page 13 for the Caltrans District numbers). The numbers correspond with the table and detailed maps of the individual hot spots on the following pages.

The "worst" hot spots based on a statewide analysis for deer-vehicle crashes in the entire state of California.
Note: AADT = Annual Average Daily Traffic.

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 1 | Del Norte | Crescent City | US Hwy 101 | 1_DN_101_237 | 1_DN_101_235 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 4,450 |
| 2 | 1 | Humboldt | Orick | US Hwy 101 | 1_HUM_101_1148 | 1_HUM_101_1145 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 4,050 |
| 3 | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_447 | 2_SIS_5_446 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 4 | No | 19,000 |
| 4 | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_99 | 2_SIS_5_96 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 22,350 |
| 5 | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_275 | 2_TEH_5_272 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 38,500 |
| 6 | 2 | Lassen | Susanville | US Hwy 395 | 2_LAS_395_555 | 2_LAS_395_529 | yellow | 2.6 | 1.0 | 0.0 | 0.0 | 3 | Yes | 6,950 |
| 7 | 3 | El Dorado | Placerville | US Hwy 50 | 3_ED_50_221 | 3_ED_50_224 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 27,450 |
| 8 | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_153 | 4_SCL_280_151 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 8 | No | 131,500 |
| 9 | 5 | San Luis Obispo | Templeton | US Hwy 101 | 5_SLO_101_497 | 5_SLO_101_492 | red | 0.5 | 0.2 | 0.3 | 0.1 | 4 | Yes | 58,850 |
| 10 | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_352 | 6_MAD_41_348 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 3 | No | 16,500 |
| 11 | 9 | Mono | Bridgeport | US Hwy 395 | 9_MNO_395_819 | 9_MNO_395_809 | orange | 1.0 | 0.6 | 0.3 | 0.0 | 2 | No | 3,050 |
| 12 | 9 | Mono | Mammoth Lakes | US Hwy 395 | 9_MNO_395_201 | 9_MNO_395_195 | orange | 0.6 | 0.2 | 0.4 | 0.0 | 4 | No | 9,650 |
| 13 | 10 | Mariposa | Mariposa | Hwy 49 | 10_MPA_49_126 | 10_MPA_49_123 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 5,200 |


**1**

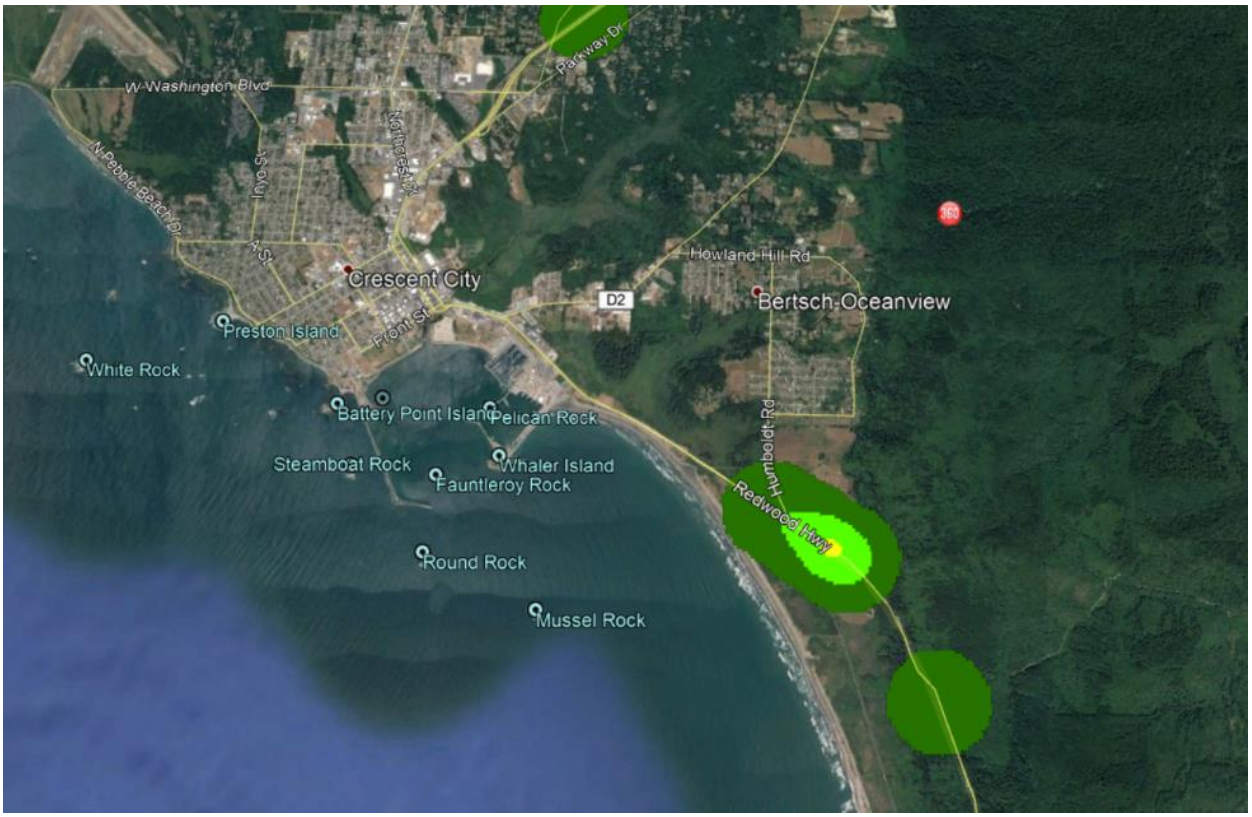
W Washington Blvd
Parkway Dr
N Pebble Beach Dr
S Hwy 1
Northcrest Dr
Howland Hill Rd
Crescent City
D2
Bertsch-Oceanview
Preston Island
Front St
White Rock
Battery Point Island
Pelican Rock
Steamboat Rock
Whaler Island
Fauntleroy Rock
Humboldt Rd
Redwood Hwy
Round Rock
Mussel Rock


**2**




**3**

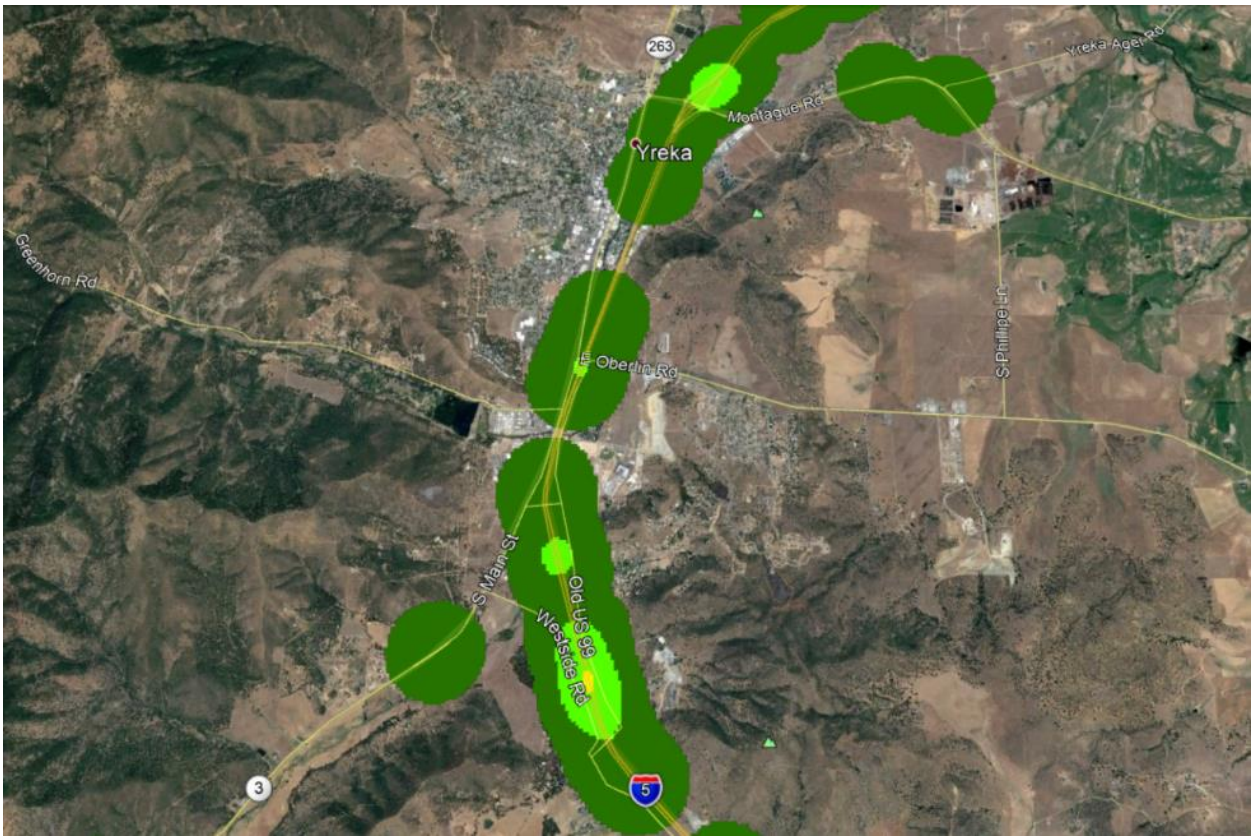
263
Yreka
Montague Rd
Yreka Agee Rd
Greenhorn Rd
E Oberlin Rd
S Phillips Ln
S Main St
Old US 99
Westside Rd
3
5


**4**

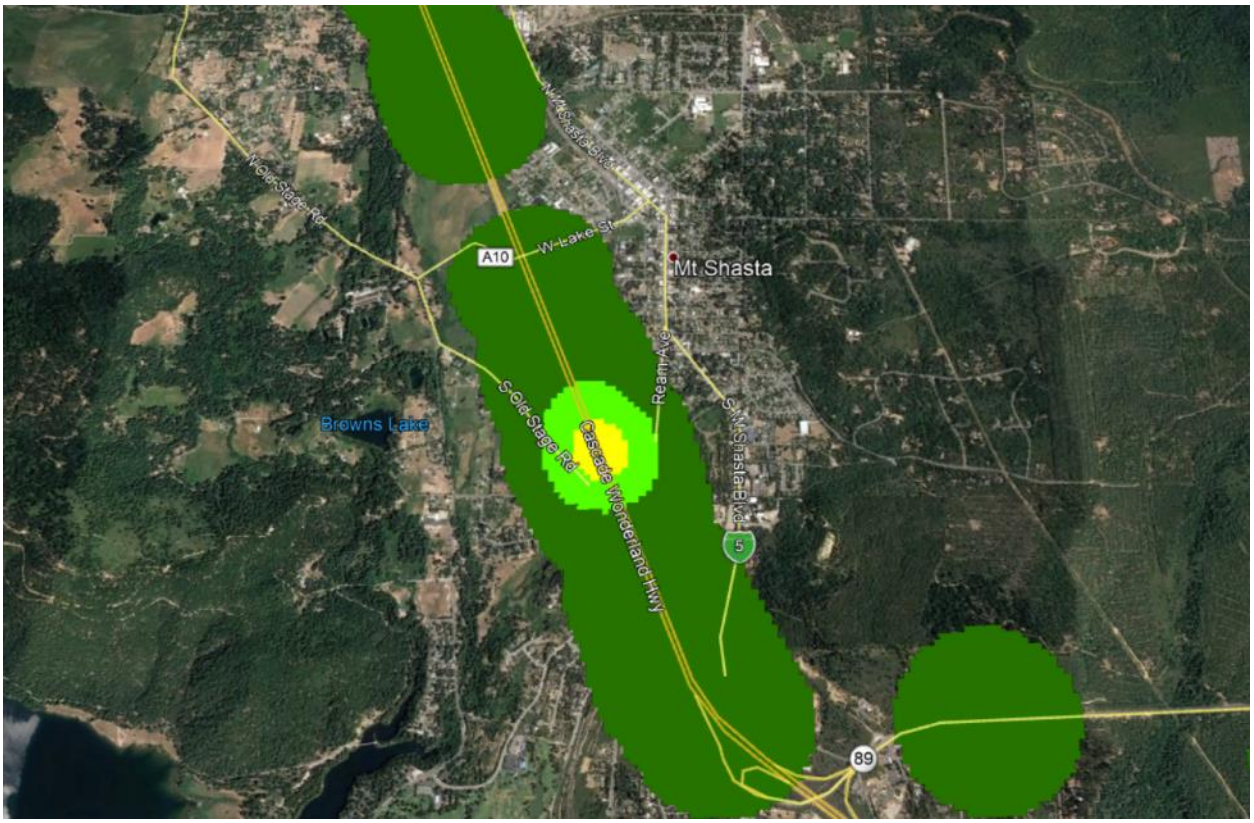
Wole Stage Rd
A10
W Lake St
Mt Shasta
Reamy Ave
S Mt Shasta Blvd
Browns Lake
S Old Stage Rd
Cascade Wonderland Hwy
5
89

**5**

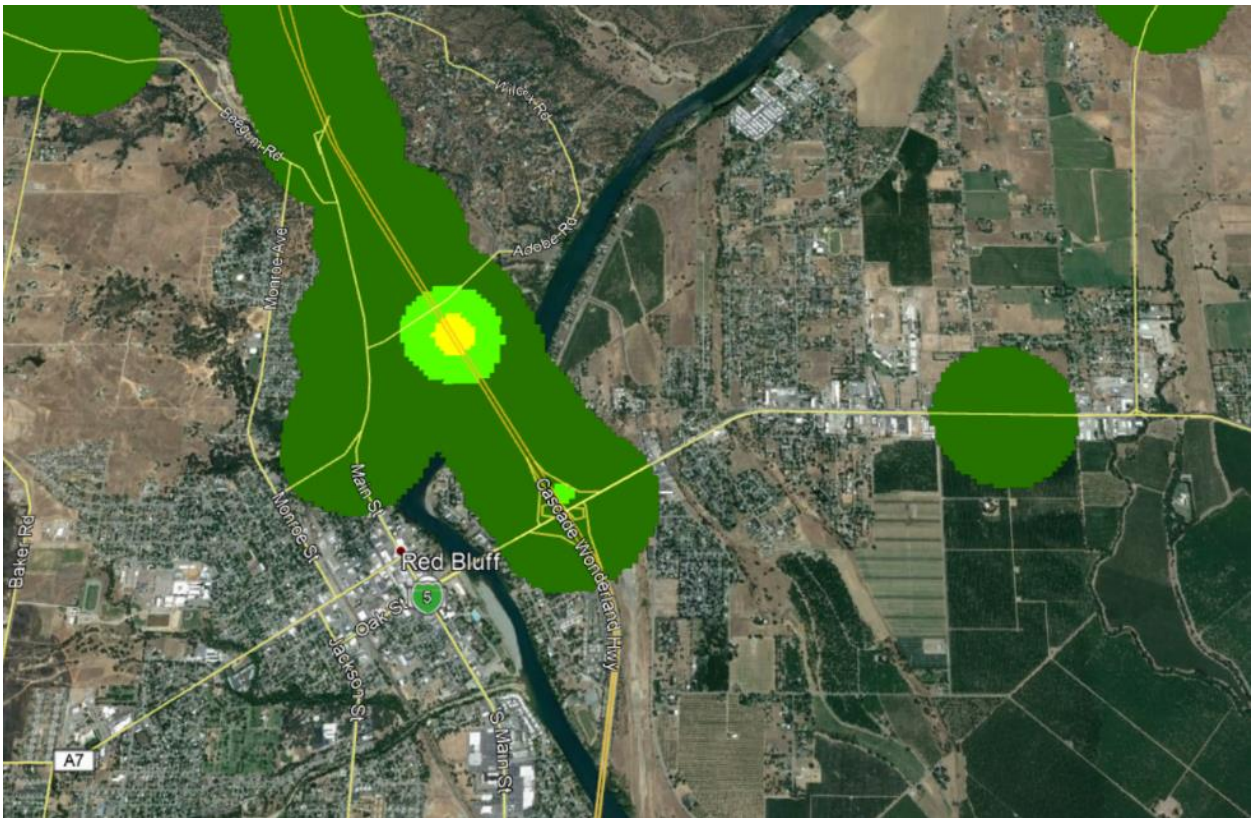
Red Bluff
Main St
Monroe St
Oak St
Jackson St
S Main St
Cascade Wonderland Hwy
Adobe Rd
Baker Rd
A7
5


**6**

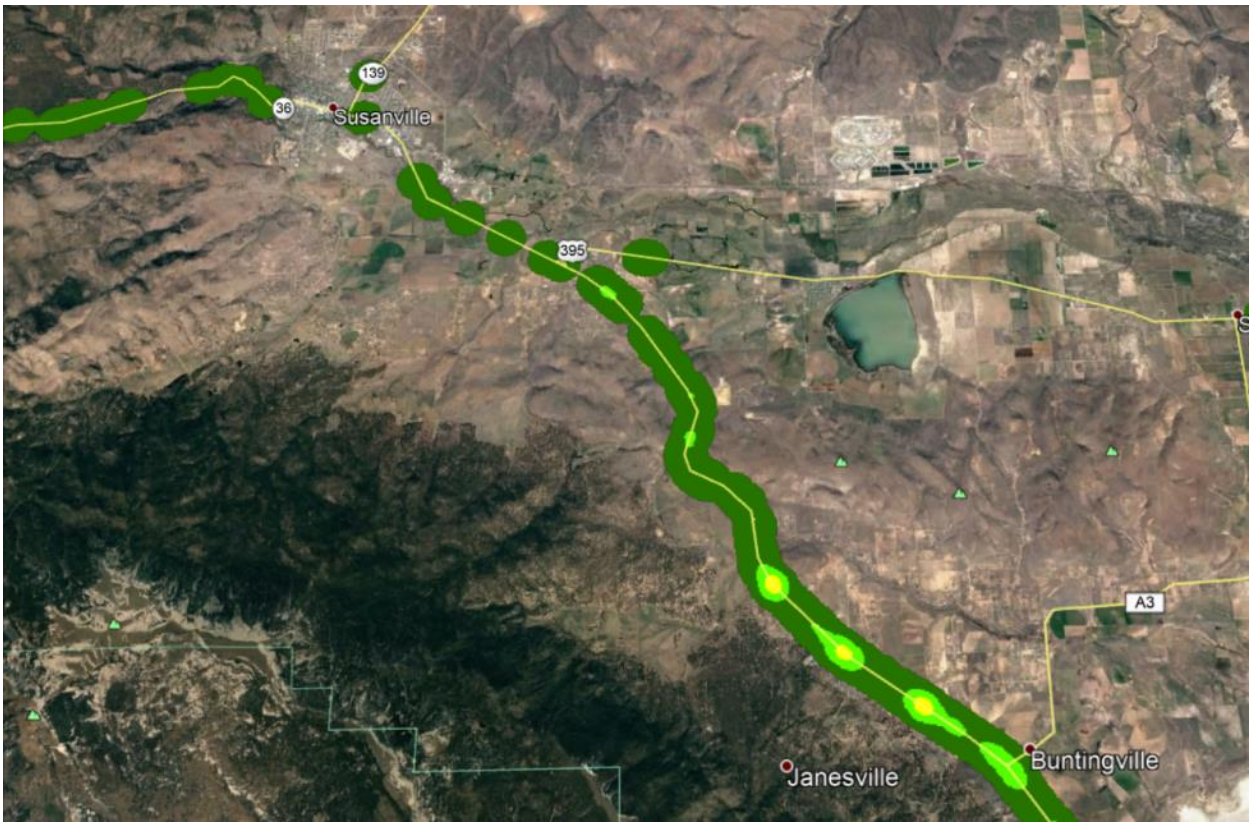


**7**


Union Ridge Rd
193
Carson Rd
Five Mile Terrace
Smithflat
Motor City
145
Mosquito Rd
Coloma Rd
49
50
Placerville
Cedar Ravine Rd


**8**

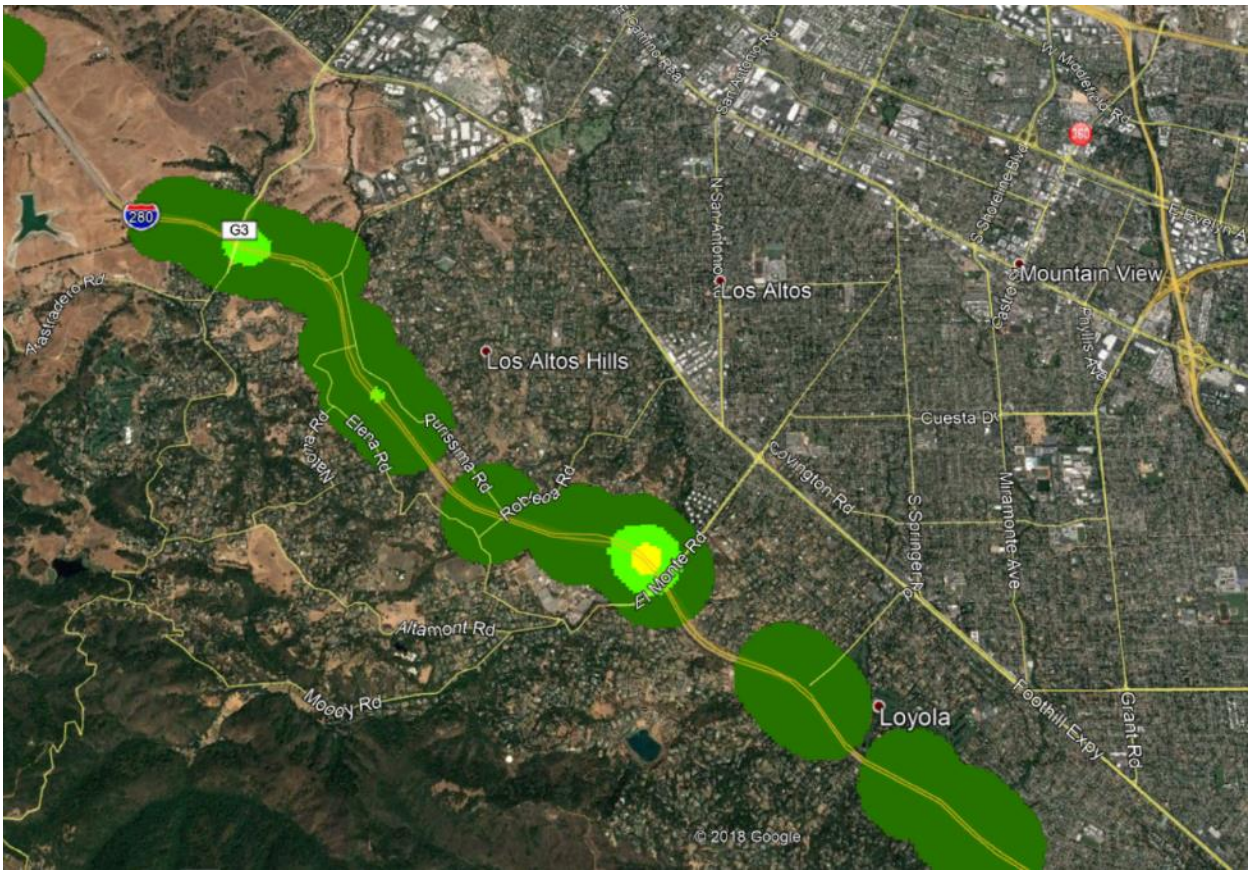
280
G3
Arastradero Rd
Los Altos Hills
Los Altos
Mountain View
N San Antonio Rd
S Springer Rd
Cuesta Dr
Covington Rd
Miramonte Ave
Purissima Rd
Robleda Rd
Elena Rd
Moody Rd
El Monte Rd
Altamont Rd
Loyola
Foothill Expy
Grant Rd
© 2018 Google


**9**

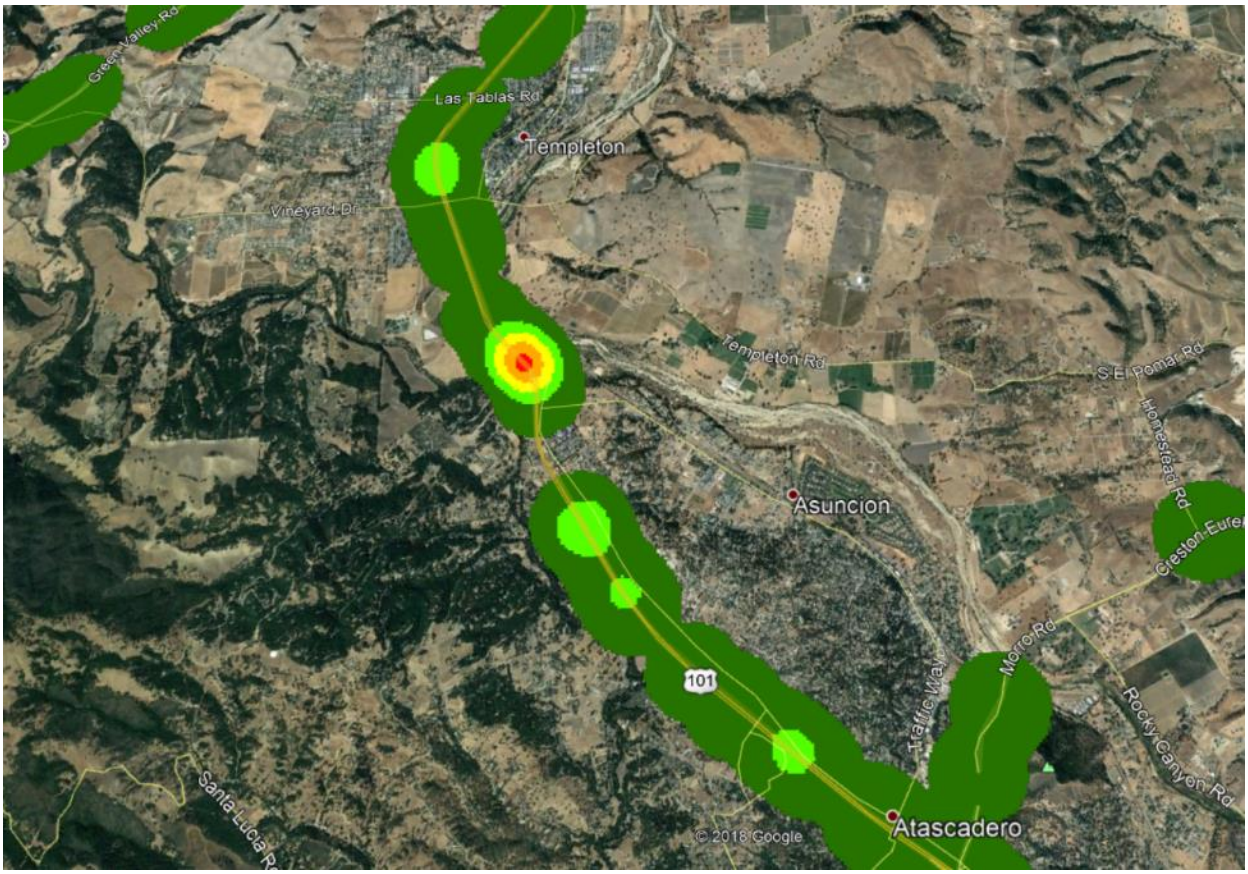
Las Tablas Rd
Templeton
Vineyard Dr
Templeton Rd
S El Pomar Rd
Homestead Rd
Asuncion
Creston Rd
Morro Rd
101
Traffic Way
Rocky Canyon Rd
Santa Lucia Rd
© 2018 Google
Atascadero

**10**

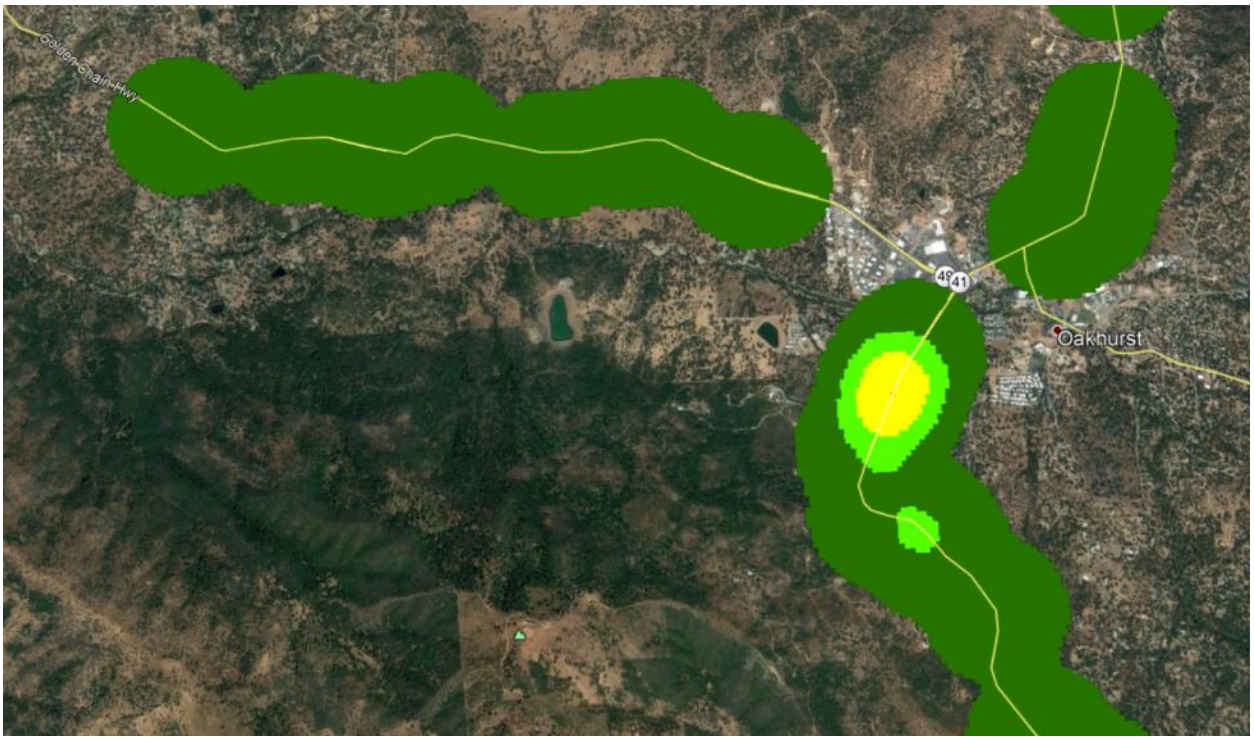


**11**

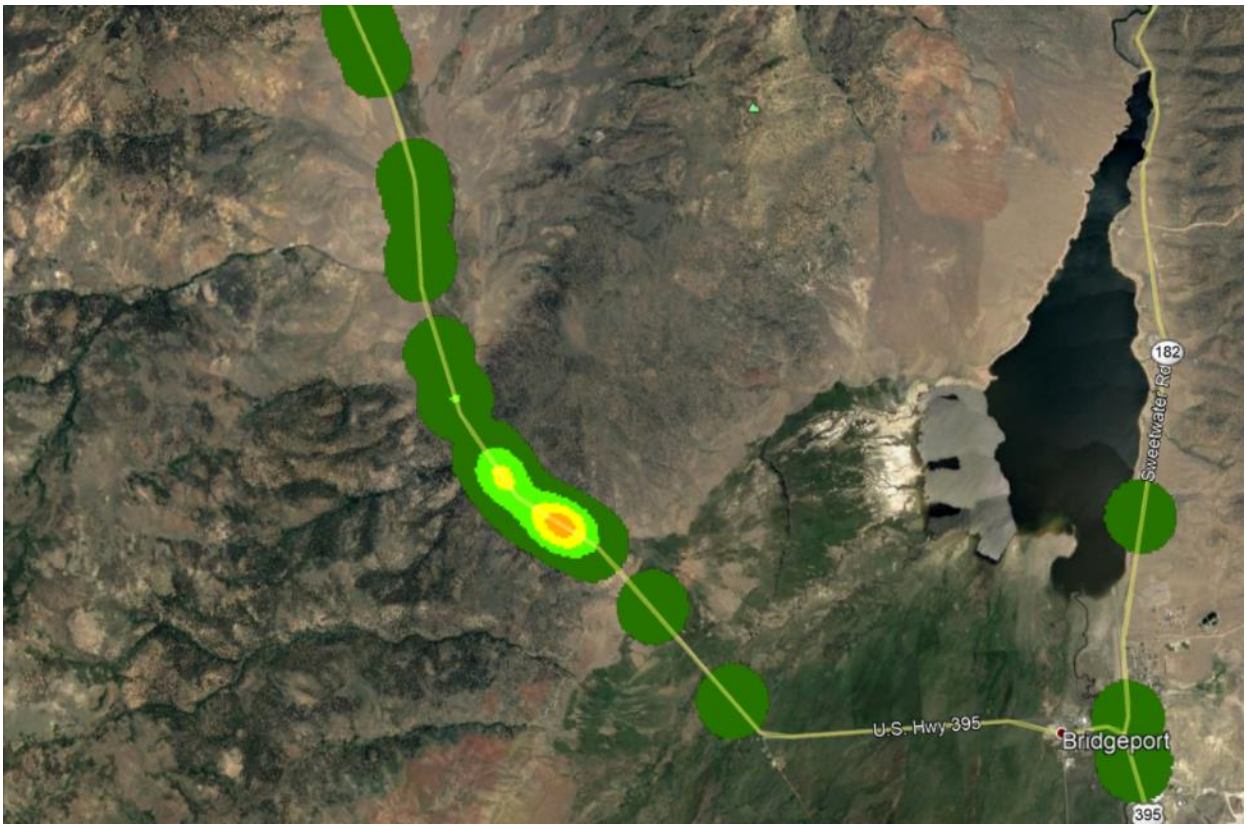

**12**



**13**

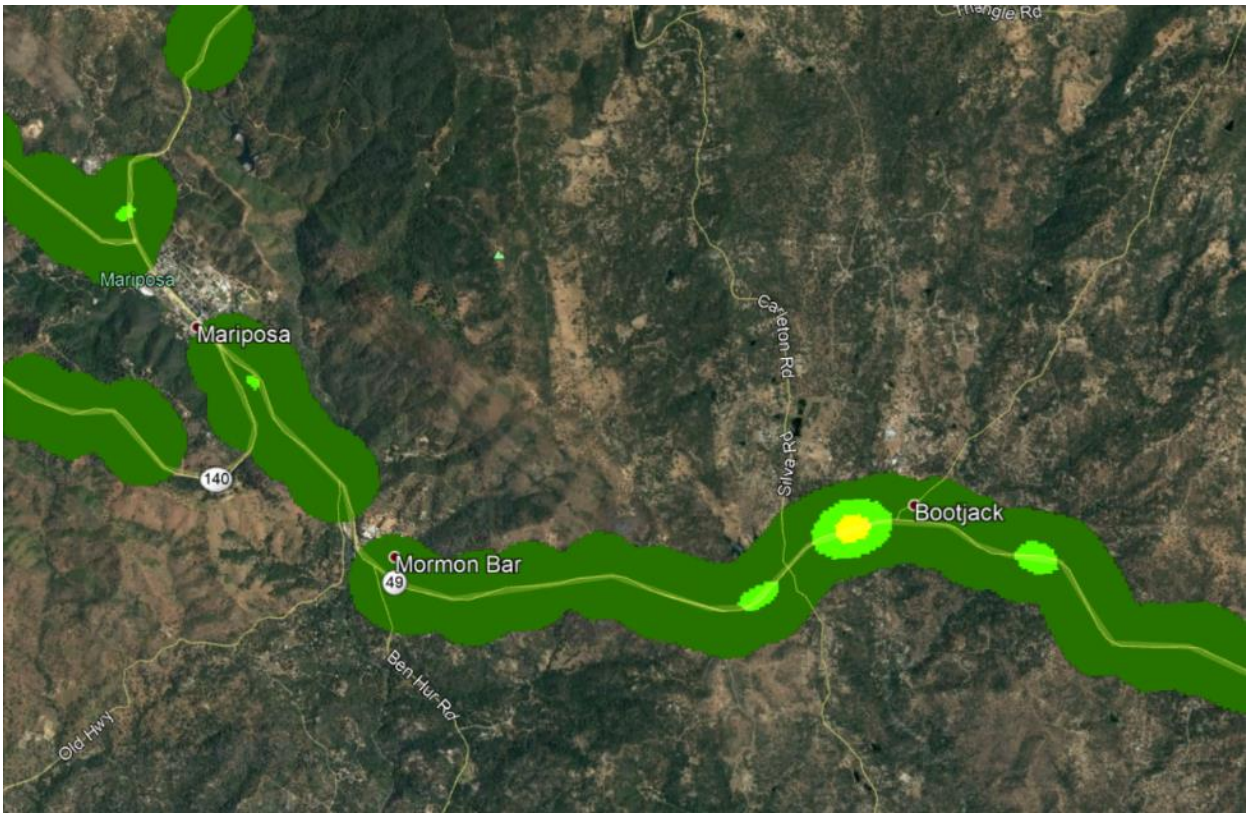
Mariposa
Mariposa
140
Carleton Rd
Silva Rd
Bootjack
Mormon Bar
49
Ben Hur Rd
Old Hwy

# 9. APPENDIX B: ANALYSES PER DISTRICT DEER-VEHICLE CRASH HOT SPOTS

CRASH DATA PER DISTRICT

The numbers in the table on the following page correspond with the detailed maps per district and maps of the individual hot spots within a district on the following pages.


The "worst" hot spots based on analyses for deer-vehicle crashes per Caltrans district. Note: AADT = Annual Average Daily Traffic.

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1a | 1 | Del Norte | Crescent City | US Hwy 101 | 1_DN_101_239 | 1_DN_101_233 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 2 | No | 4,450 |
| 1b | 1 | Humboldt | Orick | US Hwy 101 | 1_HUM_101_1150 | 1_HUM_101_1142 | red | 0.8 | 0.4 | 0.2 | 0.2 | 2 | Yes | 4,050 |
| 1c | 1 | Humboldt | Arcata | US Hwy 101 | 1_HUM_101_878 | 1_HUM_101_875 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 38,200 |
| 1d | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_147 | 1_HUM_101_143 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 8,100 |
| 1e | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_102 | 1_HUM_101_100 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 5 | No | 7,650 |
| 1f | 1 | Humboldt | Redway | US Hwy 101 | 1_HUM_101_70 | 1_HUM_101_69 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 4 | No | 6,850 |
| 1g | 1 | Mendocino | Laytonville | US Hwy 101 | 1_MEN_101_668 | 1_MEN_101_665 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 7,800 |
| 1h | 1 | Mendocino | Willits | US Hwy 101 | 1_MEN_101_426 | 1_MEN_101_424 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 4 | No | 21,000 |
| | | | | | | | | | | | | | | |
| 2a | 2 | Siskiyou | Hornbrook | I-5 | 2_SIS_5_651 | 2_SIS_5_636 | yellow | 2.5 | 0.8 | 0.0 | 0.0 | 4 | Yes | 16,200 |
| 2b | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_486 | 2_SIS_5_483 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | Yes | 16,550 |
| 2c | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_450 | 2_SIS_5_444 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 4 | No | 18,850 |
| 2d | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_100 | 2_SIS_5_95 | orange | 0.5 | 0.2 | 0.3 | 0.0 | 4 | No | 22,350 |
| 2e | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_319 | 2_TEH_5_314 | yellow | 0.5 | 0.5 | 0.0 | 0.0 | 5 | Yes | 42,750 |
| 2f | 2 | Tehama | Red Bluff | I-5 | 2_TEH_5_276 | 2_TEH_5_271 | yellow | 0.5 | 0.2 | 0.3 | 0.0 | 4 | No | 38,500 |
| 2g | 2 | Lassen | Susanville | US Hwy 395 | 2_LAS_395_557 | 2_LAS_395_501 | red | 5.6 | 2.3 | 0.8 | 0.2 | 3 | Yes | 6,950 |
| 2h | 2 | Siskiyou | Black Butte | I-5 | 2_SIS_5_149 | 2_SIS_5_145 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 24,800 |
| | | | | | | | | | | | | | | |
| 3a | 3 | El Dorado | Placerville | US Hwy 50 | 3_ED_50_229 | 3_ED_50_220 | red | 0.9 | 0.2 | 0.5 | 0.2 | 4 | No | 27,450 |
| 3b | 3 | El Dorado | Perks Corner | US Hwy 50 | 3_ED_50_152 | 3_ED_50_115 | orange | 3.7 | 1.4 | 0.2 | 0.0 | 4 | Yes | 10,600 |
| 3c | 3 | El Dorado | Shingle Springs | US Hwy 50 | 3_ED_50_88 | 3_ED_50_54 | yellow | 3.4 | 1.1 | 0.0 | 0.0 | 6 | No | 66,200 |
| 3d | 3 | Sacramento | Rancho Murieta | Hwy 16 | 3_SAC_16_197 | 3_SAC_16_194 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 11,250 |
| 3e | 3 | Nevada | Grass Valley | Hwy 49/20 | 3_NEV_20_150 | 3_NEV_20_135 | yellow | 0.5 | 0.5 | 0.0 | 0.0 | 6 | No | 21,800 |
| 3f | 3 | Nevada | Grass Valley | Hwy 20 | 3_NEV_20_115 | 3_NEV_20_111 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 3 | No | 21,300 |
| 3g | 3 | Nevada | Penn Valley | Hwy 20 | 3_NEV_20_70 | 3_NEV_20_66 | orange | 0.4 | 0.2 | 0.2 | 0.0 | 3 | No | 15,800 |
| 3h | 3 | Nevada | La Barr Meadows | Hwy 49 | 3_NEV_49_121 | 3_NEV_49_117 | orange | 0.4 | 0.2 | 0.2 | 0.0 | 3 | No | 24,500 |
| 3i | 3 | Nevada | Alta Sierra | Hwy 49 | 3_NEV_49_90 | 3_NEV_49_79 | orange | 1.1 | 0.5 | 0.2 | 0.0 | 3 | No | 23,550 |
| 3j | 3 | Nevada | Higgins Corner | Hwy 49 | 3_NEV_49_40 | 3_NEV_49_26 | orange | 1.4 | 0.7 | 0.3 | 0.0 | 2 | Yes | 23,200 |
| 3k | 3 | Placer | Overhill Dr | Hwy 49 | 3_PLA_49_113 | 3_PLA_49_110 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 30,700 |
| 3l | 3 | Placer | Elders Corner | Hwy 49 | 3_PLA_49_81 | 3_PLA_49_78 | orange | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 32,500 |
| 3m | 3 | Placer | Weimar | I-80 | 3_PLA_80_295 | 3_PLA_80_291 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 5 | Yes | 39,450 |
| | | | | | | | | | | | | | | |
| 4a | 4 | Marin | San Rafael | US Hwy 101 | 4_MRN_101_128 | 4_MRN_101_125 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 10 | No | 202,700 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 4b | 4 | Marin | Strawberry | US Hwy 101 | 4_MRN_101_59 | 4_MRN_101_56 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 10 | No | 152,800 |
| 4c | 4 | San Mateo | Highlands-Baywood Park | I-280 | 4_SM_280_144 | 4_SM_280_122 | yellow | 2.2 | 1.0 | 0.0 | 0.0 | 10 | Yes | 129,000 |
| 4d | 4 | San Mateo | Woodside | I-280 | 4_SM_280_95 | 4_SM_280_31 | orange | 6.4 | 1.7 | 0.3 | 0.0 | 8 | Yes | 114,000 |
| 4e | 4 | Santa Clara | Stanford | I-280 | 4_SM_280_2 | 4_SCL_280_182 | yellow | 2.6 | 0.6 | 0.0 | 0.0 | 8 | No | 121,000 |
| 4f | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_154 | 4_SCL_280_150 | red | 0.4 | 1.0 | 2.0 | 1.0 | 6 | No | 131,500 |
| 4g | 4 | Contra Costa | Condit | Hwy 24 | 4_CC_24_78 | 4_CC_24_76 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 8 | No | 209,500 |
| 4h | 4 | Contra Costa | Orinda | Hwy 24 | 4_CC_24_25 | 4_CC_24_21 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 8 | No | 188,000 |
| 4i | 4 | Alameda | Redwood Heights | Hwy 13 | 4_ALA_13_54 | 4_ALA_13_51 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 54,600 |
| | | | | | | | | | | | | | | |
| 5a | 5 | San Luis Obispo | Templeton | US Hwy 101 | 5_SLO_101_497 | 5_SLO_101_492 | red | 0.5 | 0.2 | 0.3 | 0.1 | 4 | Yes | 58,850 |
| | | | | | | | | | | | | | | |
| 6a | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_352 | 6_MAD_41_347 | red | 0.5 | 0.2 | 0.2 | 0.1 | 3 | No | 19,000 |
| 6b | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_317 | 6_MAD_41_314 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 19,000 |
| | | | | | | | | | | | | | | |
| 7a | 7 | Los Angeles | Glendale | Hwy 134 | 7_LA_134_94 | 7_LA_134_90 | red | 0.4 | 0.1 | 0.2 | 0.1 | 8 | No | 209,500 |
| 7b | 7 | Los Angeles | Glendale | Hwy 2 | 7_LA_2_228 | 7_LA_2_200 | orange | 2.8 | 0.7 | 0.1 | 0.0 | 9 | No | 124,500 |
| 7c | 7 | Los Angeles | Sherman Oaks | I-405 | 7_LA_405_387 | 7_LA_405_383 | orange | 0.4 | 0.3 | 0.1 | 0.0 | 12 | No | 253,500 |
| 7d | 7 | Ventura | Casitas Springs | Hwy 33 | 7_VEN_33_59 | 7_VEN_33_55 | orange | 0.4 | 0.3 | 0.1 | 0.0 | 3 | No | 26,500 |
| 7e | 7 | Ventura | Moorpark | Hwy 118 | 7_VEN_118_202 | 7_VEN_118_200 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 5 | No | 79,500 |
| | | | | | | | | | | | | | | |
| 8a | 8 | San Bernardino | Crestline | Hwy 18 | 8_SBD_18_162 | 8_SBD_18_151 | red | 1.1 | 0.3 | 0.6 | 0.2 | 4 | No | 16,550 |
| 8b | 8 | San Bernardino | Silverwood Lake | Hwy 138 | 8_SBD_138_249 | 8_SBD_138_247 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 2,925 |
| 8c | 8 | San Bernardino | Running Springs | Hwy 330 | 8_SBD_330_433 | 8_SBD_330_407 | orange | 2.6 | 0.6 | 0.3 | 0.0 | 2 | No | 11,500 |
| 8d | 8 | San Bernardino | Running Springs | Hwy 18 | 8_SBD_18_294 | 8_SBD_18_290 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 5,750 |
| 8e | 8 | San Bernardino | Skyforest | Hwy 18 | 8_SBD_18_263 | 8_SBD_18_261 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 5,750 |
| 8f | 8 | Riverside | Palo Verde Intake | US Hwy 95 | 8_RIV_95_125 | 8_RIV_95_123 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 1,300 |
| | | | | | | | | | | | | | | |


| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9a | 9 | Mono | Bridgeport | US Hwy 395 | 9_MNO_395_819 | 9_MNO_395_809 | red | 1.0 | 0.5 | 0.3 | 0.2 | 2 | No | 3,050 |
| 9b | 9 | Mono | Whitmore Hot Spr. | US Hwy 395 | 9_MNO_395_202 | 9_MNO_395_195 | red | 0.7 | 0.3 | 0.3 | 0.1 | 4 | No | 7,250 |
| 9c | 9 | Mono | Grant Lake | US Hwy 395 | 9_MNO_395_448 | 9_MNO_395_445 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 4,625 |
| | | | | | | | | | | | | | | |
| 10a | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_127 | 10_MPA_49_111 | red | 1.6 | 0.4 | 0.2 | 0.2 | 2 | Yes | 5,200 |
| 10b | 10 | Calaveras | San Andreas | Hwy 49 | 10_CAL_49_208 | 10_CAL_49_205 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | Yes | 7,250 |
| | | | | | | | | | | | | | | |
| 11a | 11 | San Diego | Warner Springs | Hwy 79 | 11_SD_79_363 | 11_SD_79_357 | red | 0.6 | 0.2 | 0.2 | 0.2 | 2 | No | 1,400 |
| 11b | 11 | San Diego | Santa Ysabel | Hwy 78 | 11_SD_78_548 | 11_SD_78_520 | red | 2.8 | 0.5 | 0.3 | 0.1 | 2 | No | 4,425 |
| 11c | 11 | San Diego | Lake Cuyamaca | Hwy 79 | 11_SD_79_103 | 11_SD_79_99 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 1,650 |
| 11d | 11 | San Diego | La Jolla | I-5 | 11_SD_5_298 | 11_SD_5_295 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 12 | No | 174,500 |
| | | | | | | | | | | | | | | |
| 12a | 12 | Orange | Las Flores | Hwy 241 | 12_ORA_241_168 | 12_ORA_241_152 | red | 1.6 | 0.3 | 0.2 | 0.1 | 4 | Yes | 6,900 |
| 12b | 12 | Orange | Peters Cany. Res. | Hwy 261 | 12_ORA_261_59 | 12_ORA_261_56 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 5 | Yes | 32,200 |
| 12c | 12 | Orange | Villa Park | Hwy 241 | 12_ORA_241_388 | 12_ORA_241_385 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 9 | No | 47,800 |
| 12d | 12 | Orange | Laguna Woods | Hwy 73 | 12_ORA_73_167 | 12_ORA_73_165 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 7 | No | 62,700 |

**CRASH DATA DISTRICT 1**

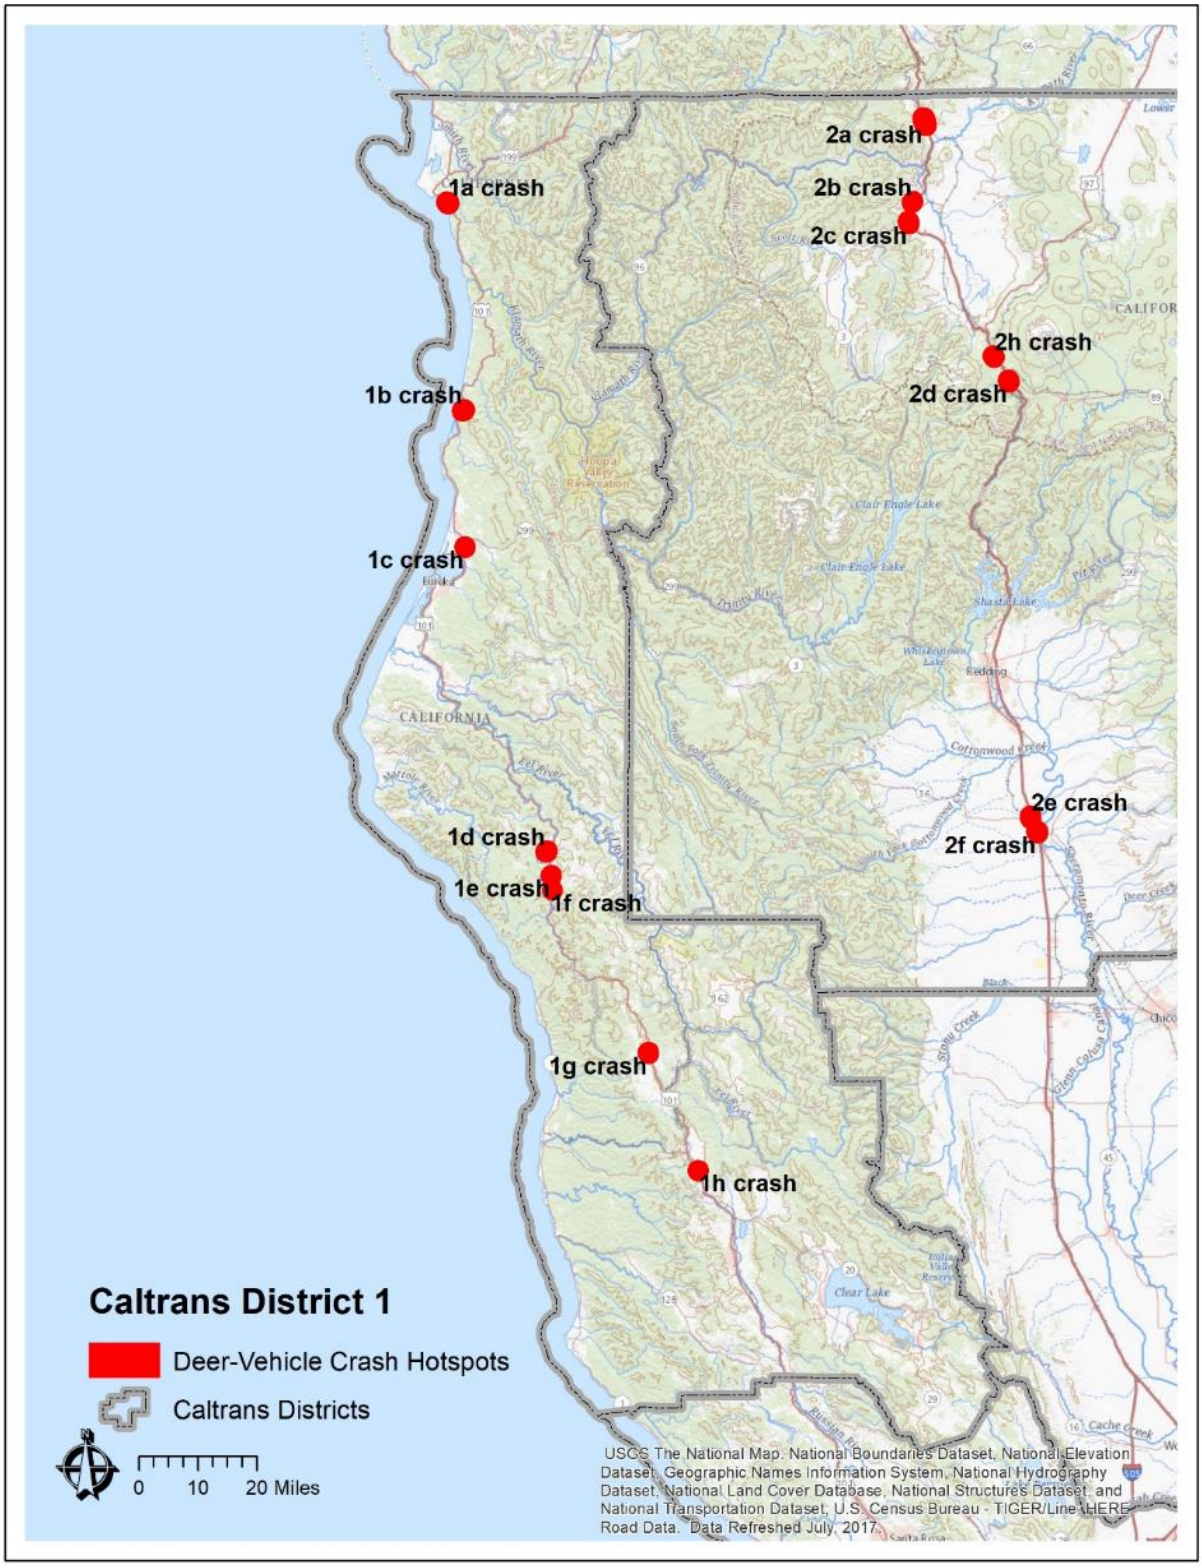


Hot spots in District 1 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**1a**

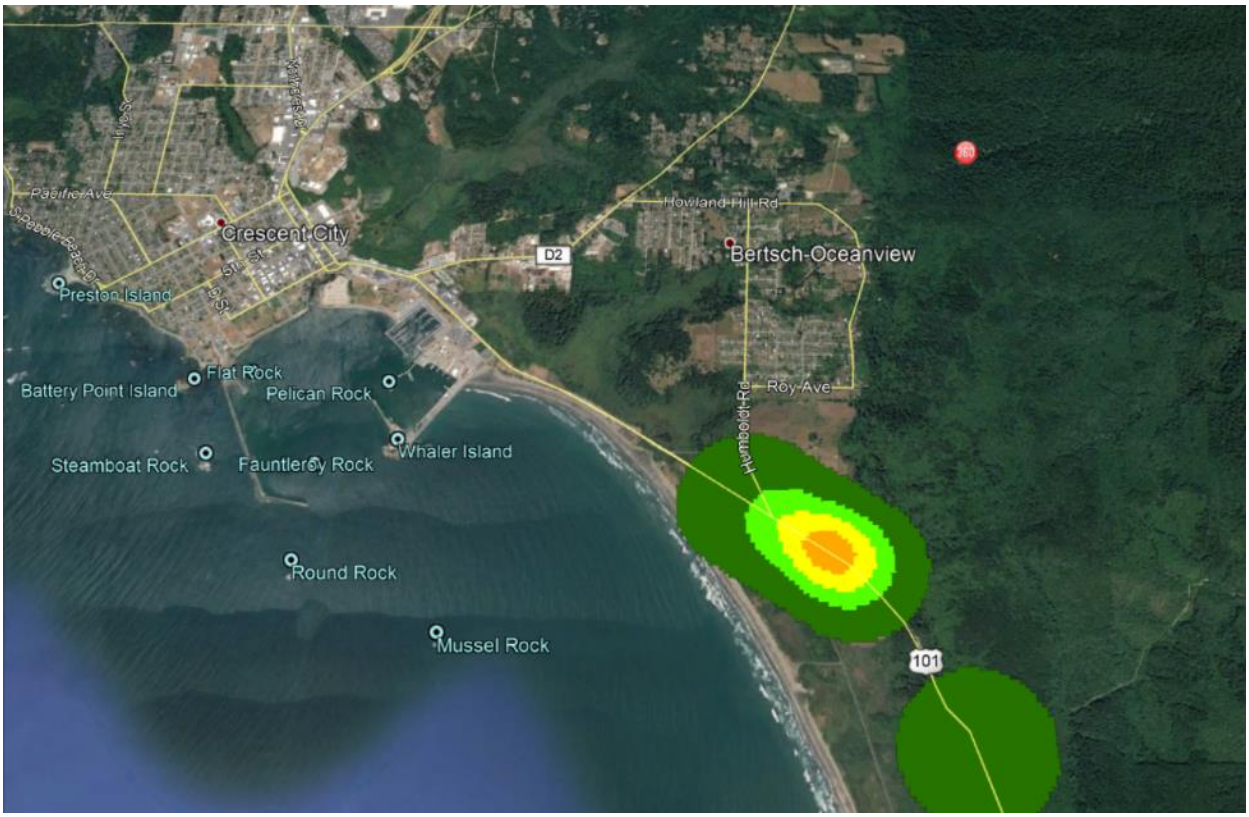
Pacific Ave
Crescent City
D2
Howland Hill Rd
Bertsch-Oceanview
Preston Island
St
B St
Flat Rock
Battery Point Island
Pelican Rock
Roy Ave
Humboldt Rd
Steamboat Rock
Fauntleroy Rock
Whaler Island
Round Rock
Mussel Rock
101


**1b**




**1c**

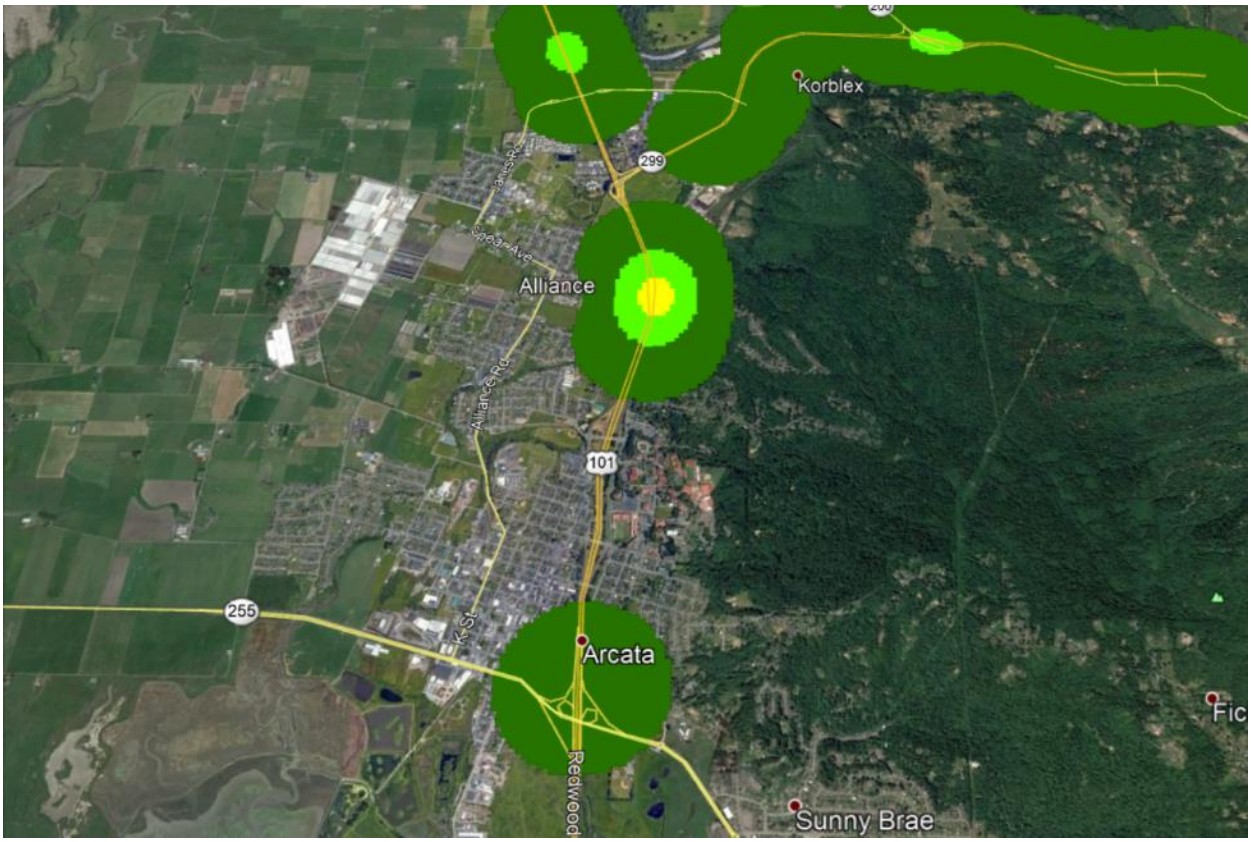
Korblex
299
Alliance
Alliance Rd
101
255
K St
Arcata
Redwood
Sunny Brae


**1d**

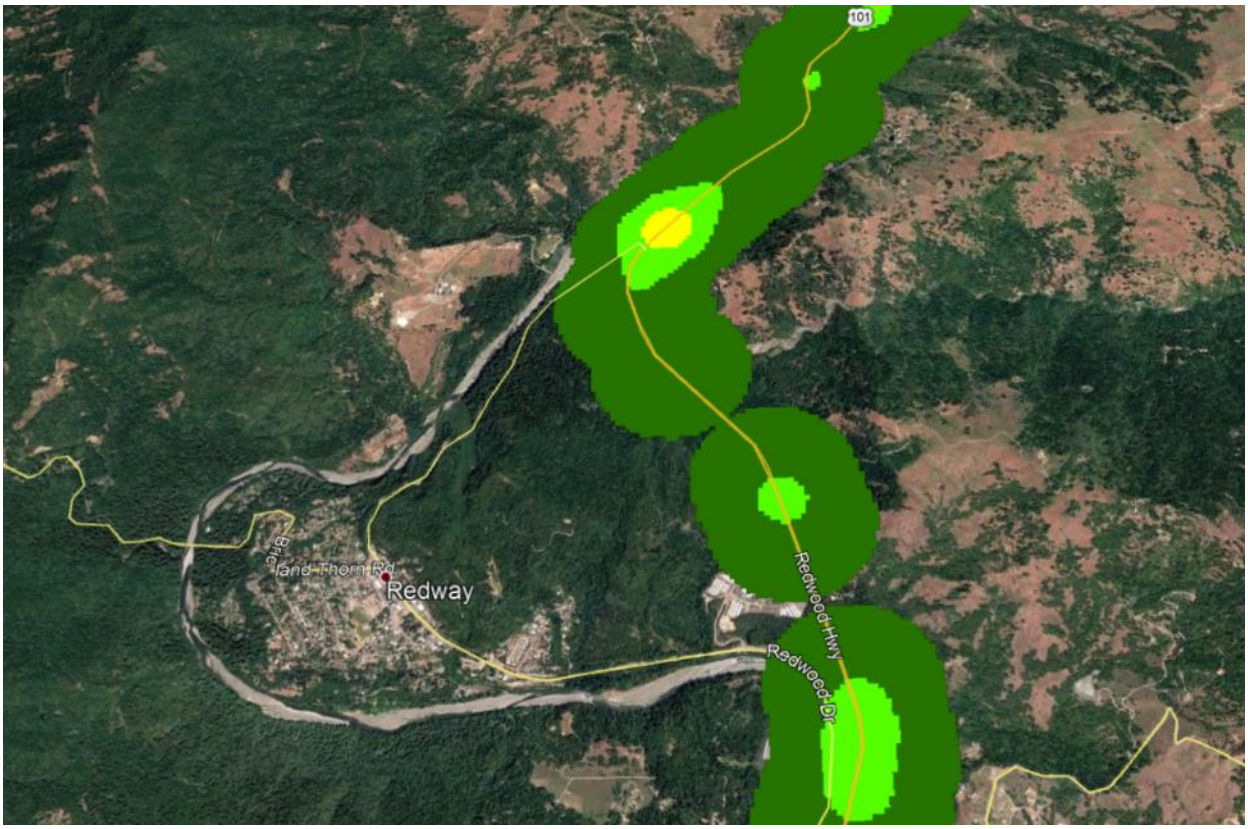


**1e**

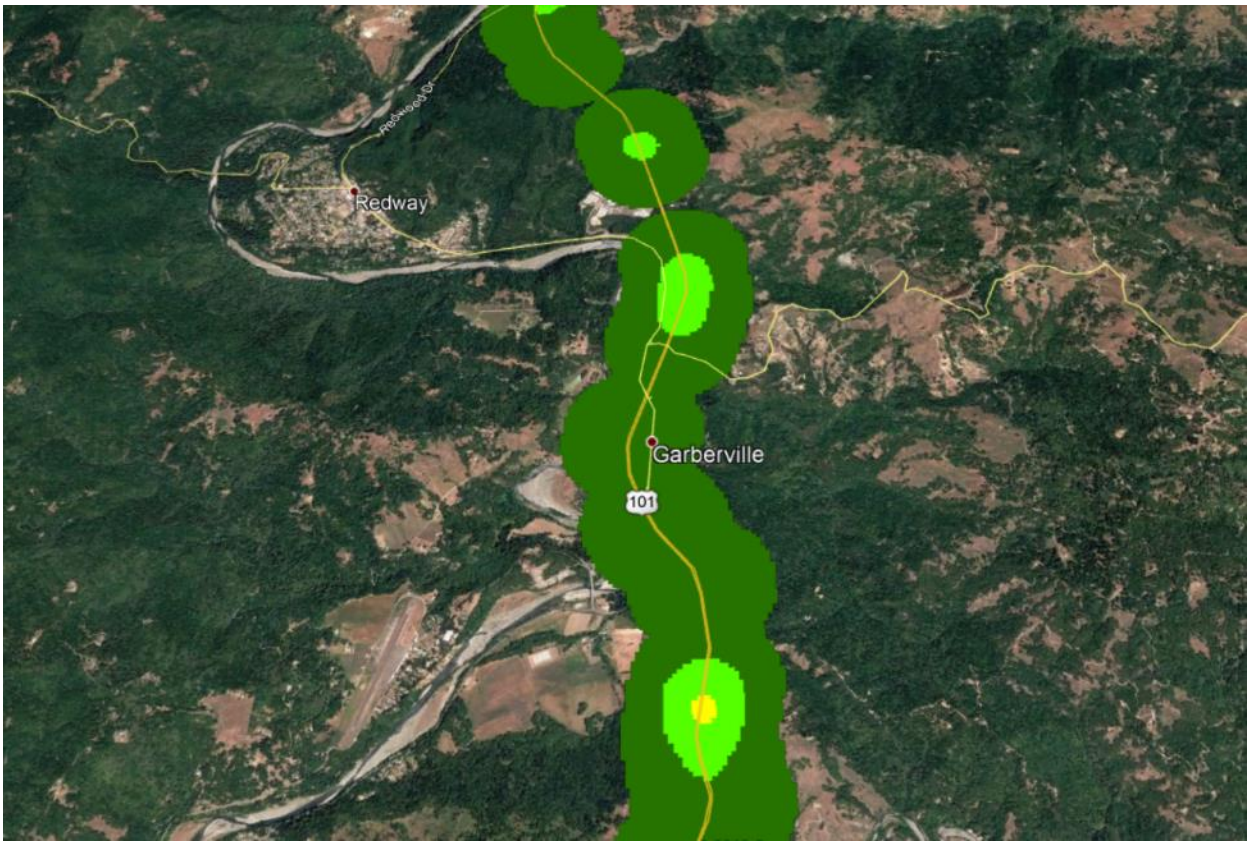


**1f**

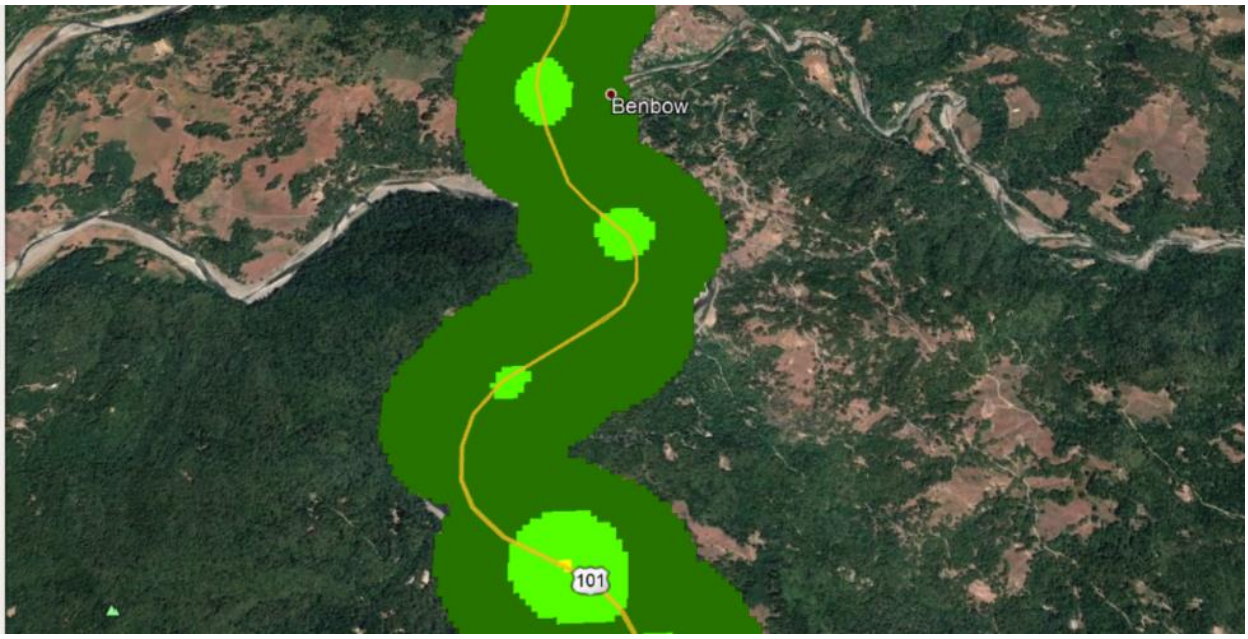


**1g**

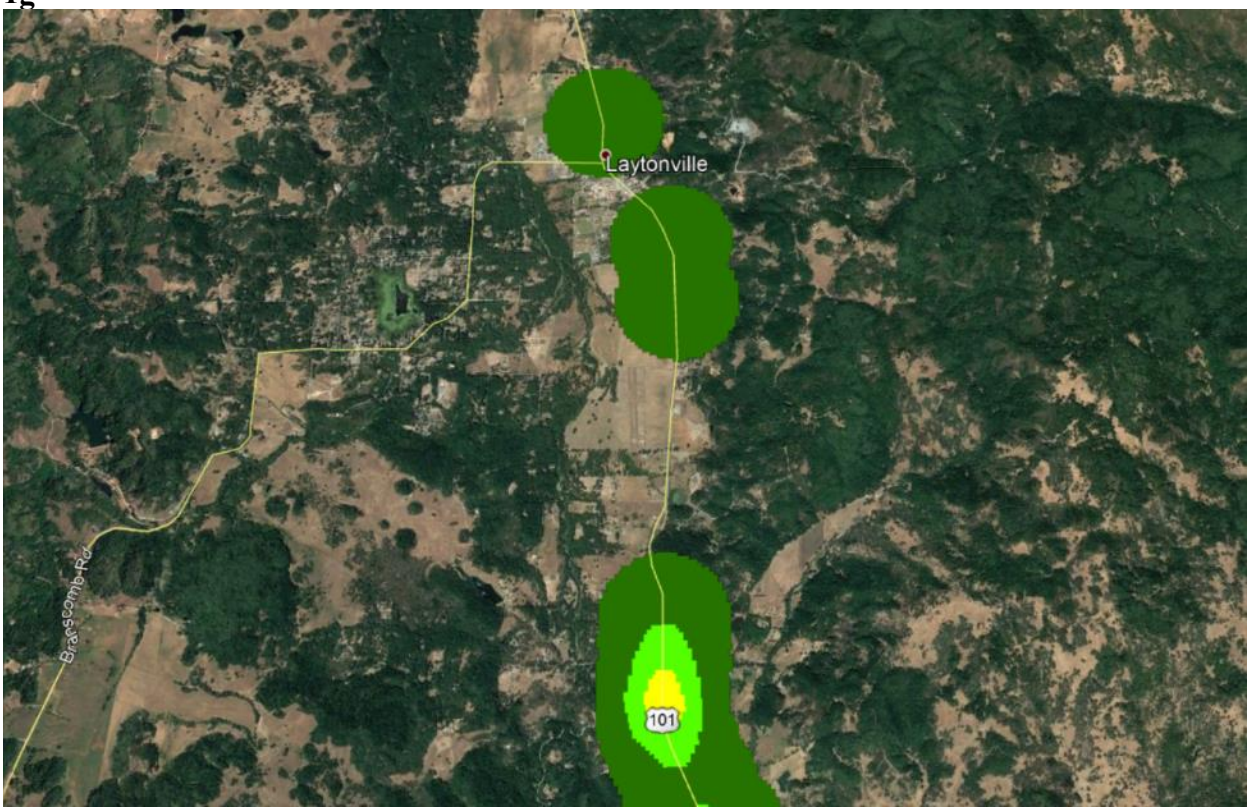

**1h**

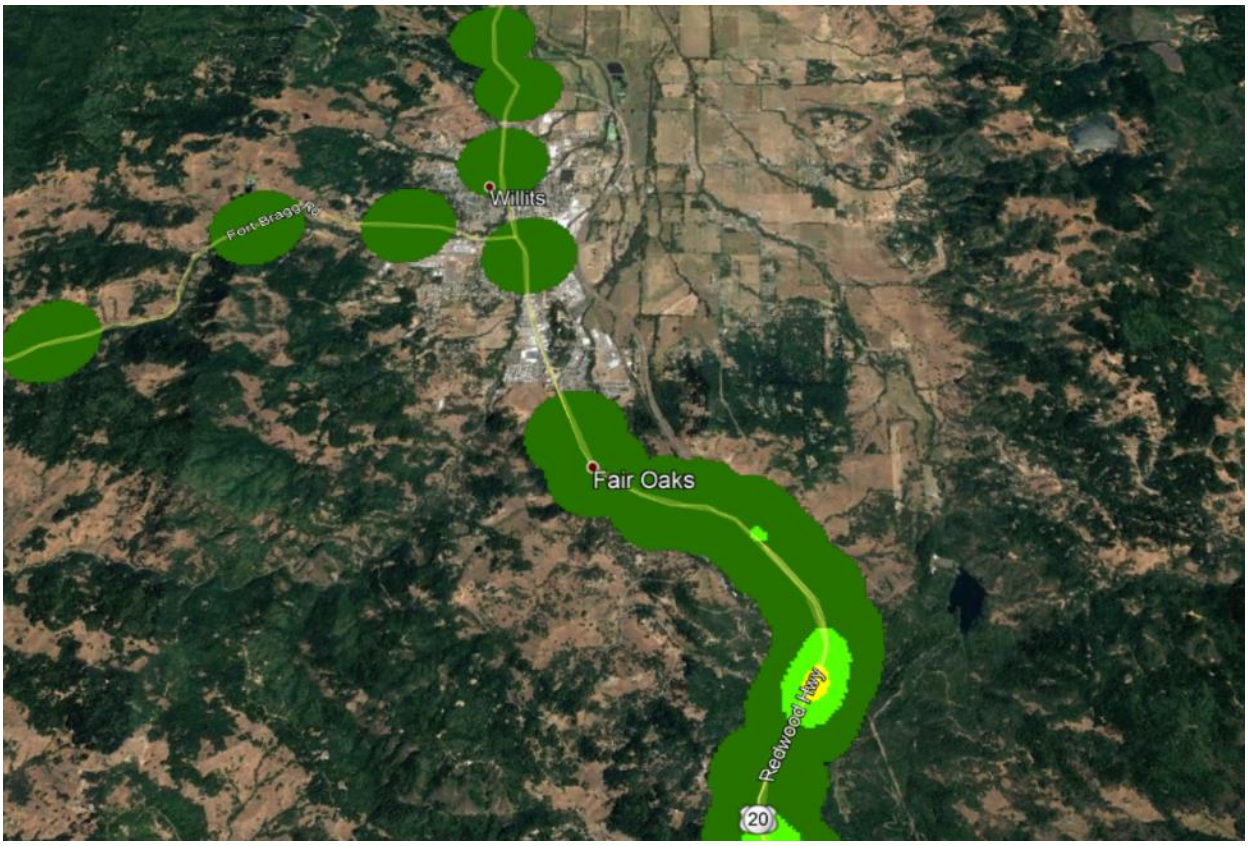


**CRASH DATA DISTRICT 2**

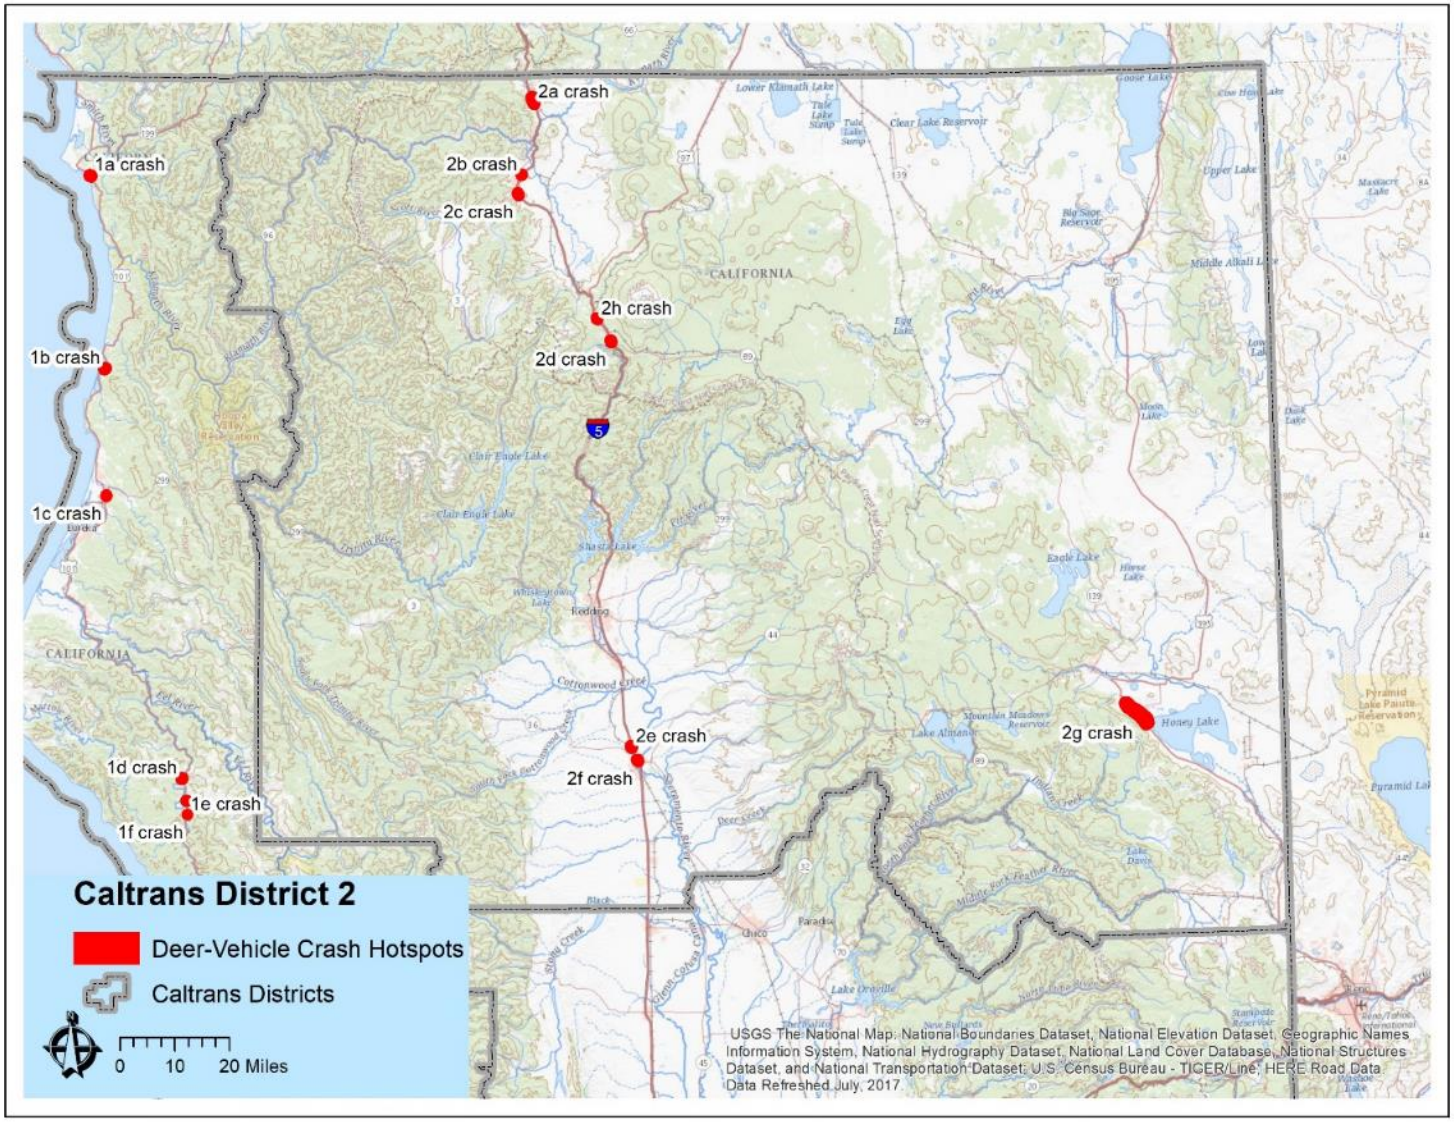


Hot spots in District 2 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**2a**

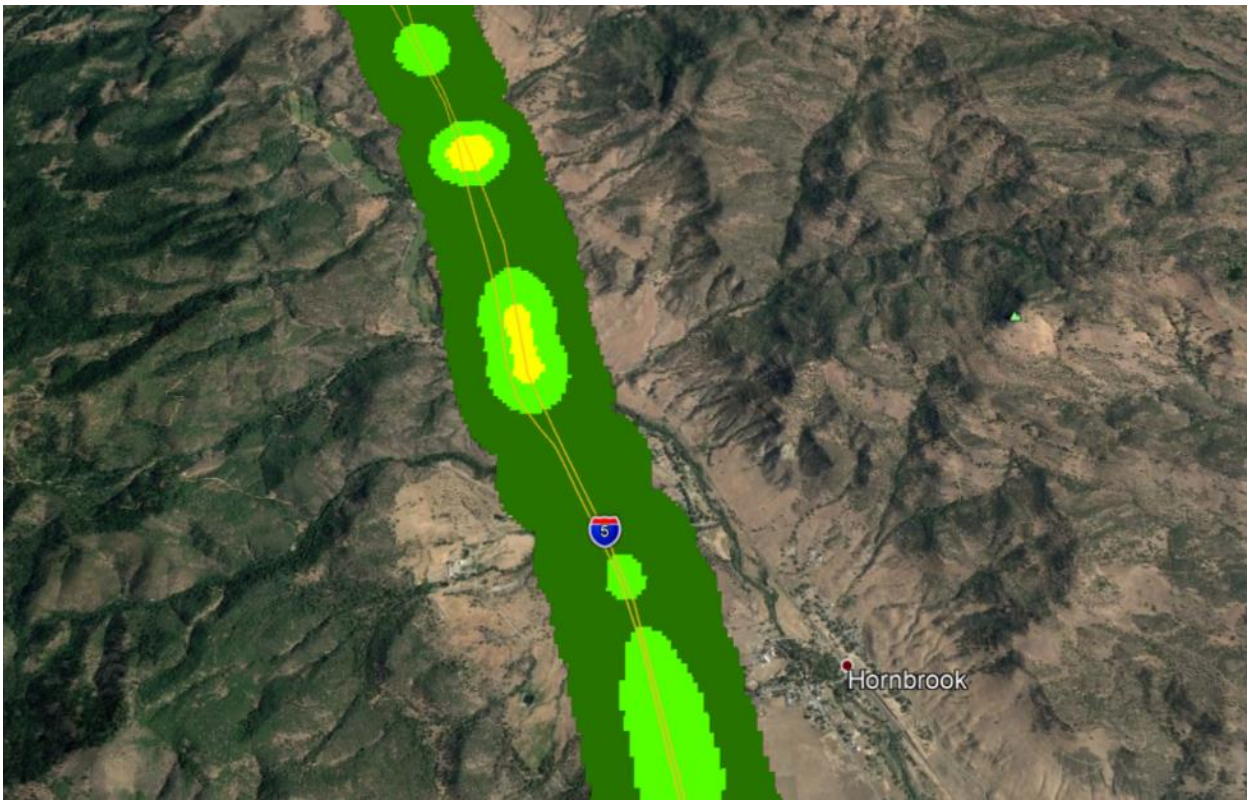


**2b**




**2c**


Yreka
Gazelle-Yreka Rd
E Oberlin Rd
S Phillips
Oberlin Rd
S Main St
3
5
Fort Jones Rd
Easy St


**2d**

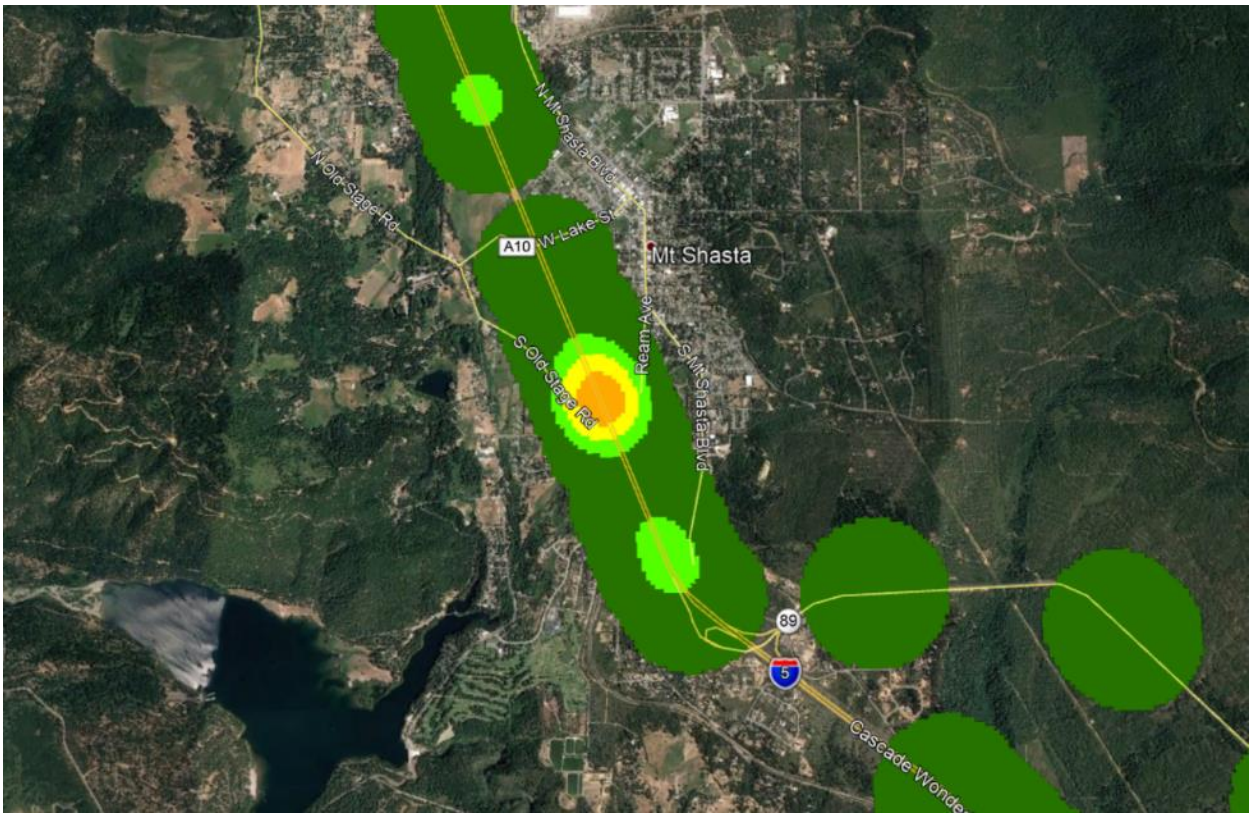
N Mt Shasta Blvd
N Old Stage Rd
A10
W Lake St
Mt Shasta
Ream Ave
S Mt Shasta Blvd
S Old Stage Rd
89
5
Cascade Wonde


**2e**

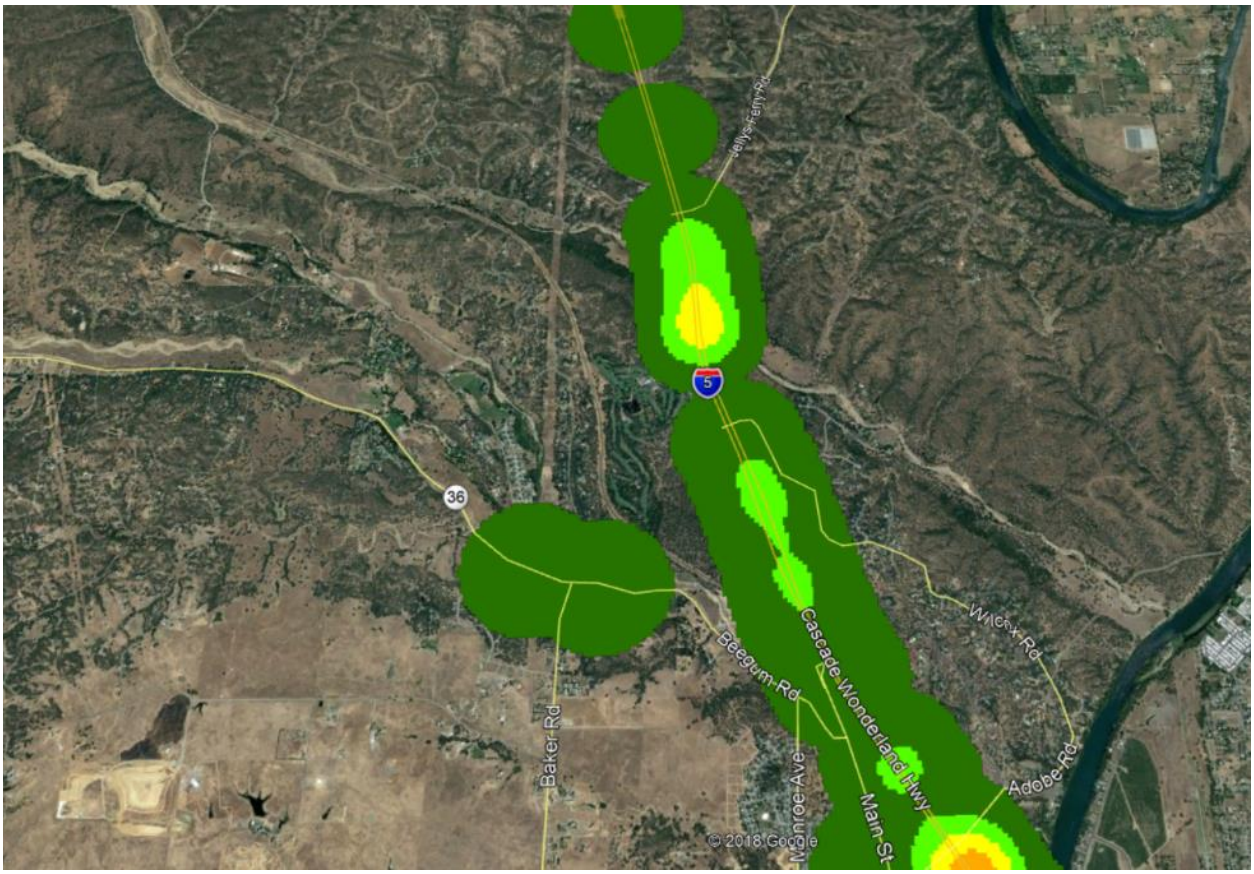
5
36
Baker Rd
Beegum Rd
Cascade Wonderland Hwy
Main St
Monroe Ave
Adobe Rd
© 2018 Google

**2f**

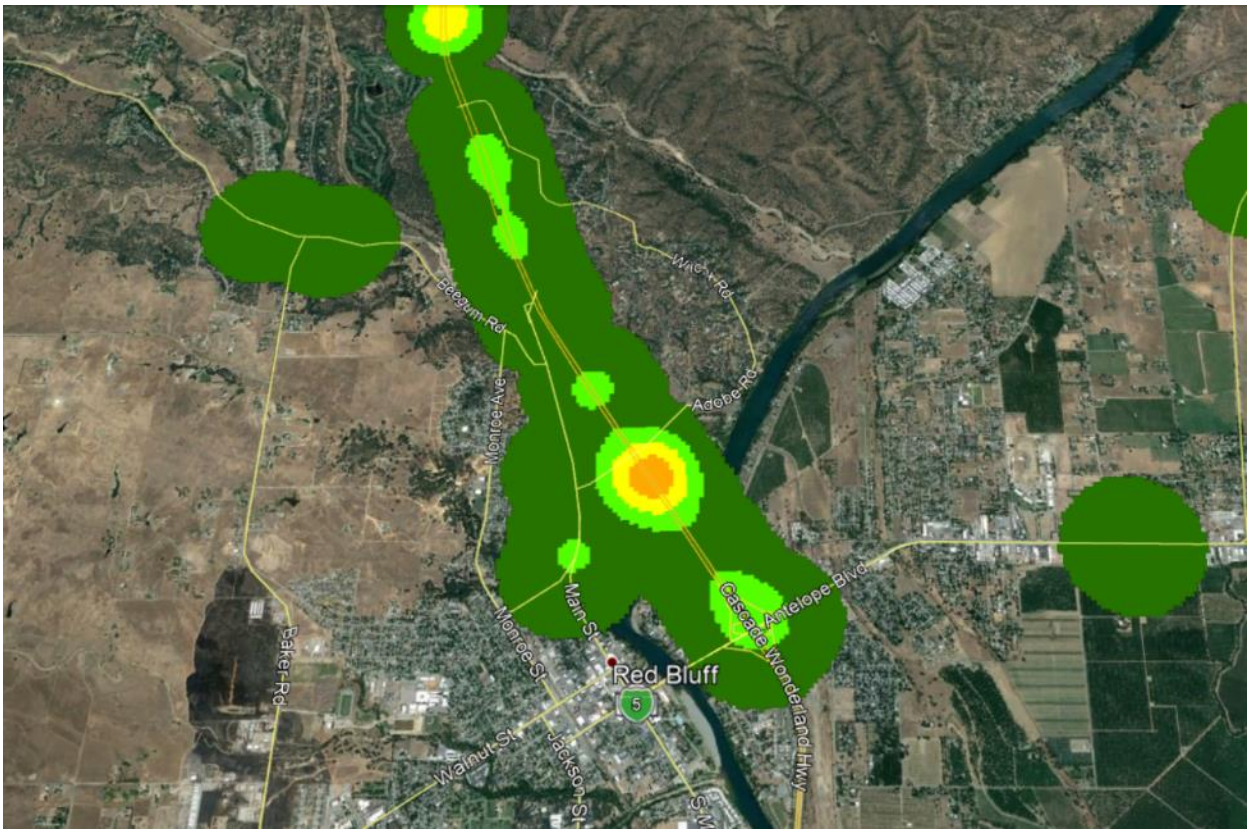
Beegum Rd
Adobe Rd
Monroe Ave
Main St
Antelope Blvd
Cascade Wonderland Hwy
Red Bluff
5
Baker Rd
Monroe St
Walnut St
Jackson St


**2g**

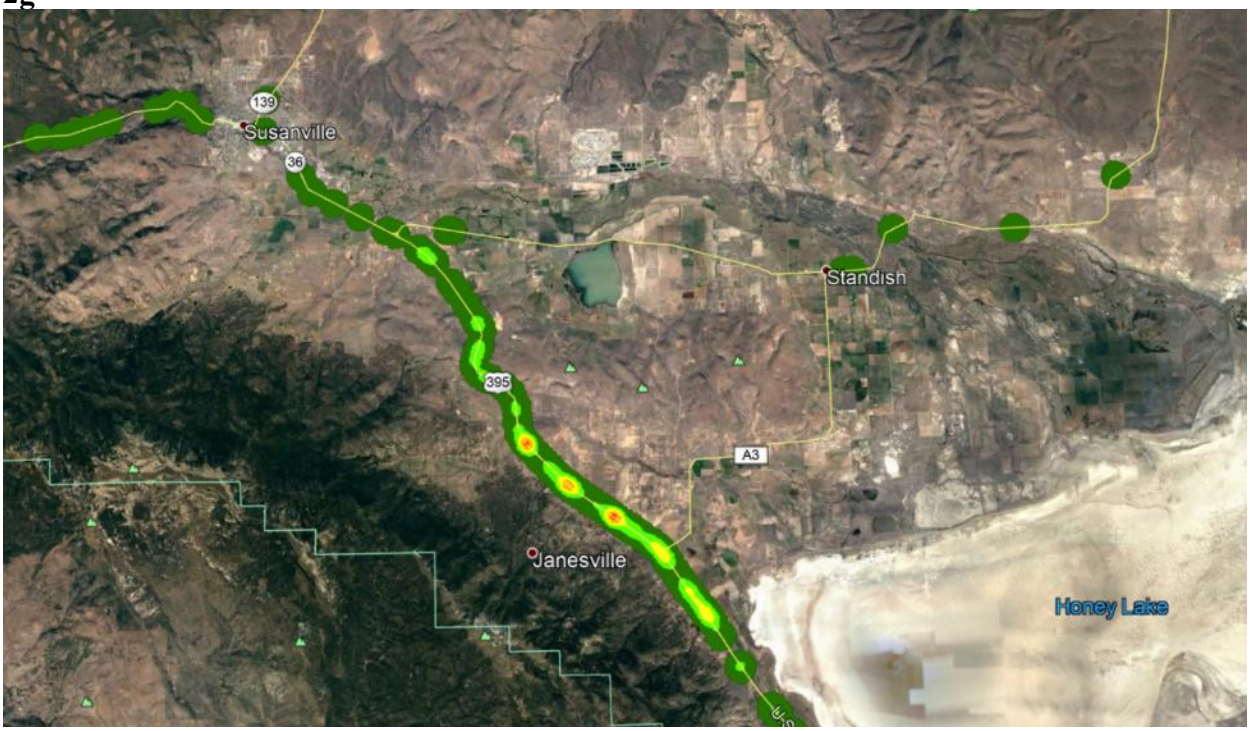

**2h**




**CRASH DATA DISTRICT 3**

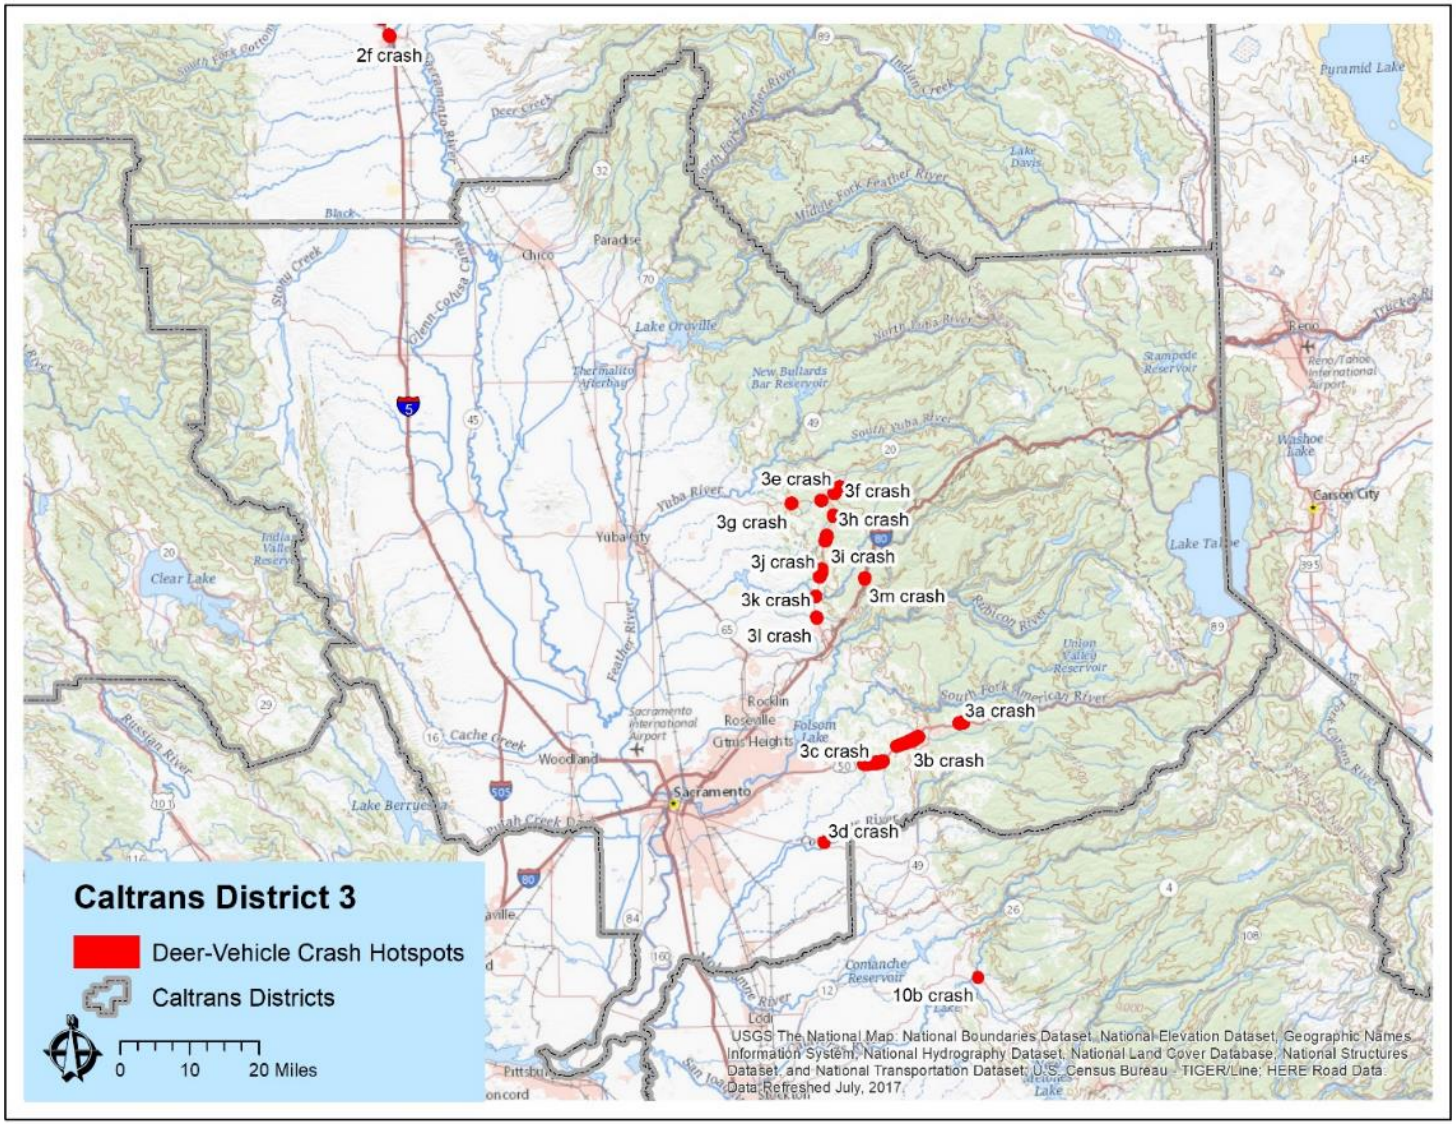



Hot spots in District 3 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**3a**

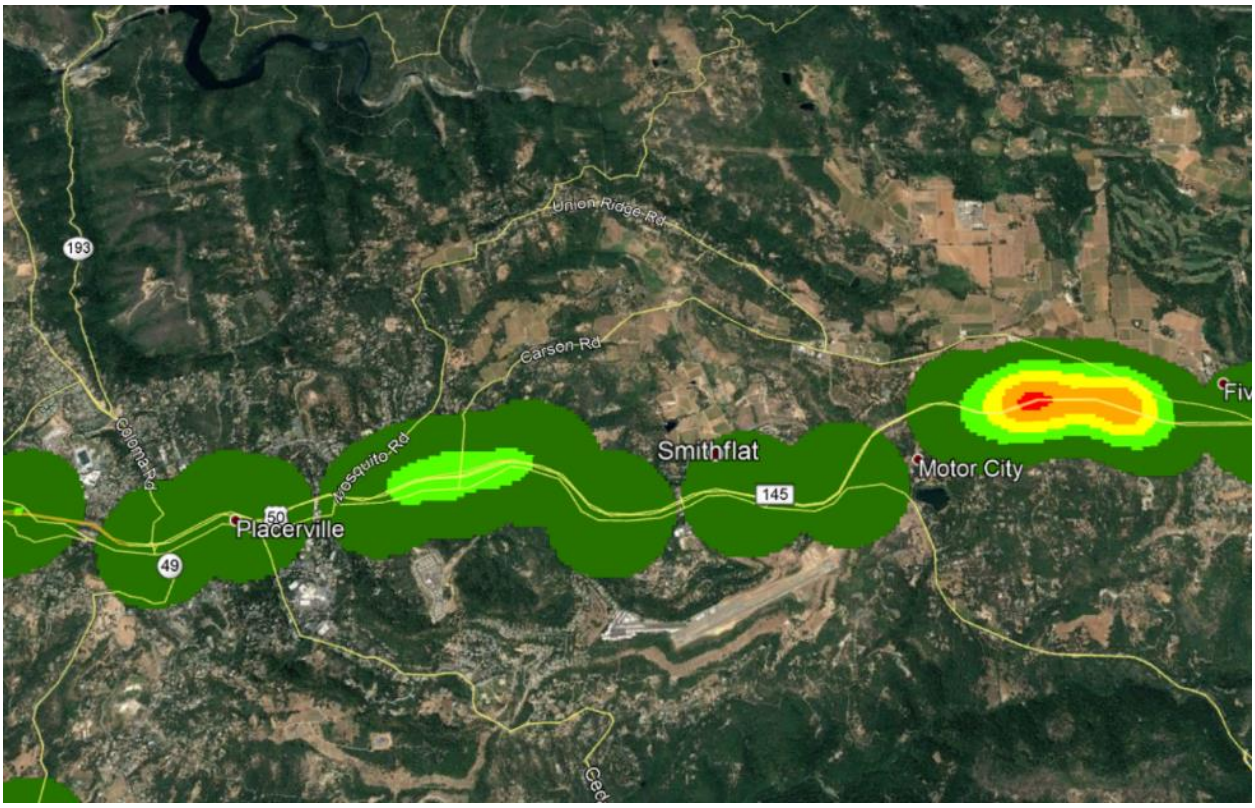
Union Ridge Rd
193
Carson Rd
Colonia Rd
Mesquite Rd
Smithflat
Motor City
145
50
Placerville
49


**3b**

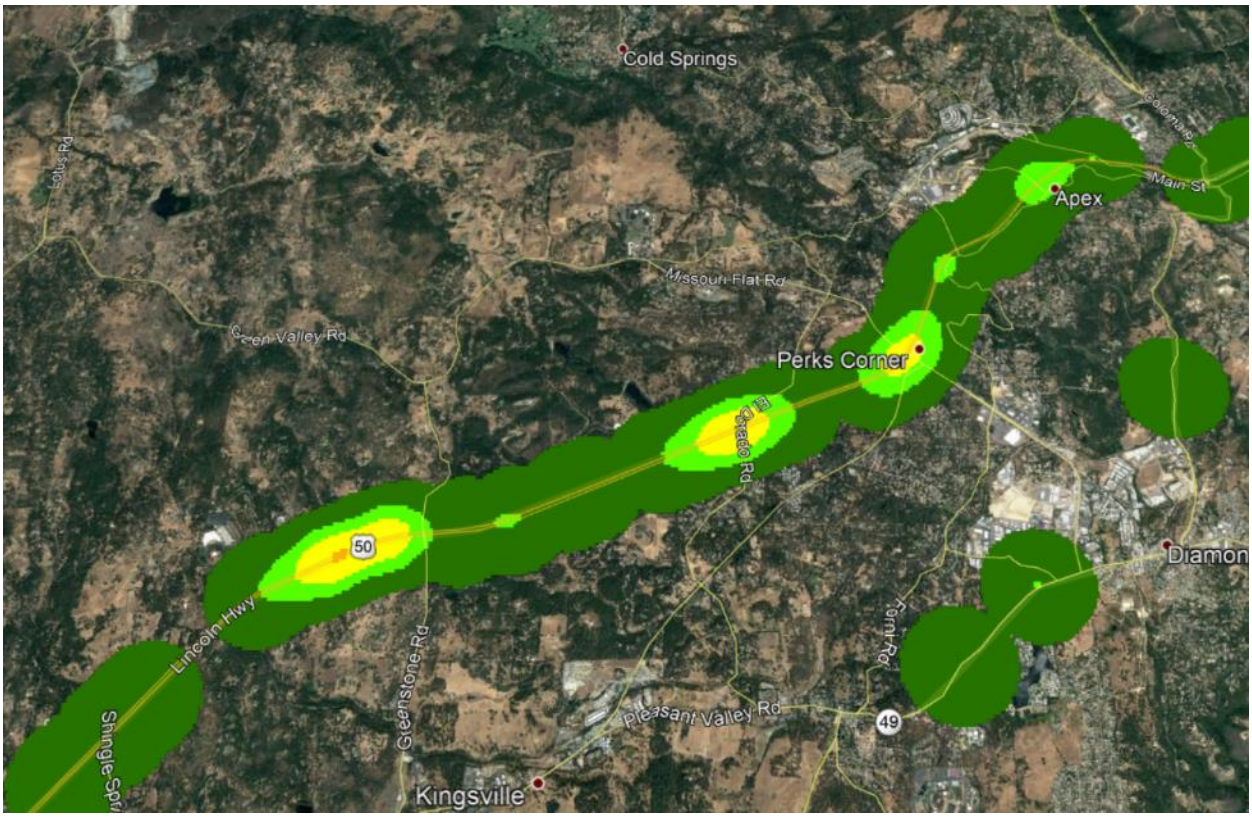
Cold Springs
Apex
Main St
Missouri Flat Rd
Perks Corner
Creedo Rd
50
Diamon
Lincoln Hwy
Greenstone Rd
Pleasant Valley Rd
49
Kingsville


**3c**

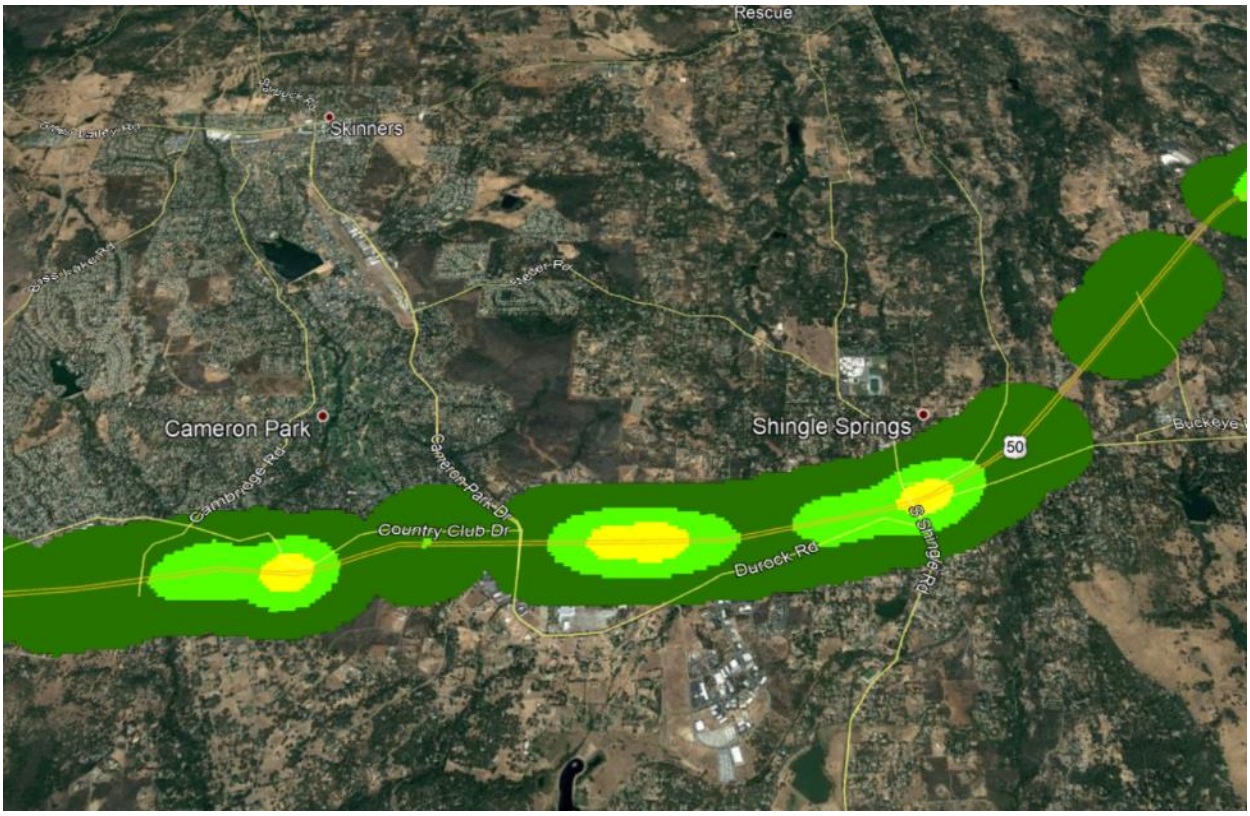
Rescue
Skinners
Cameron Park
Shingle Springs
50
Cambridge Rd
Cameron Park Dr
Country Club Dr
Durock Rd
S Shingle Rd


**3d**

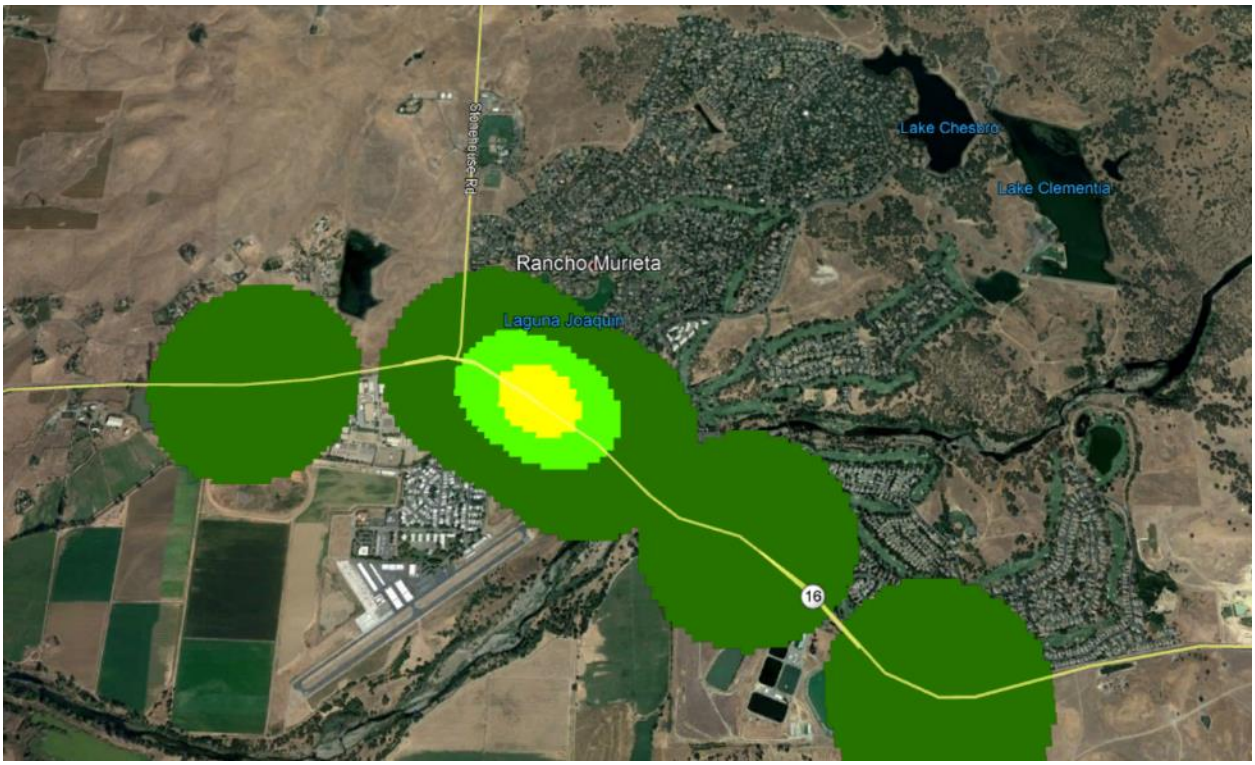
Lake Chesbro
Lake Clementia
Rancho Murieta
Laguna Joaquin
16


**3e**

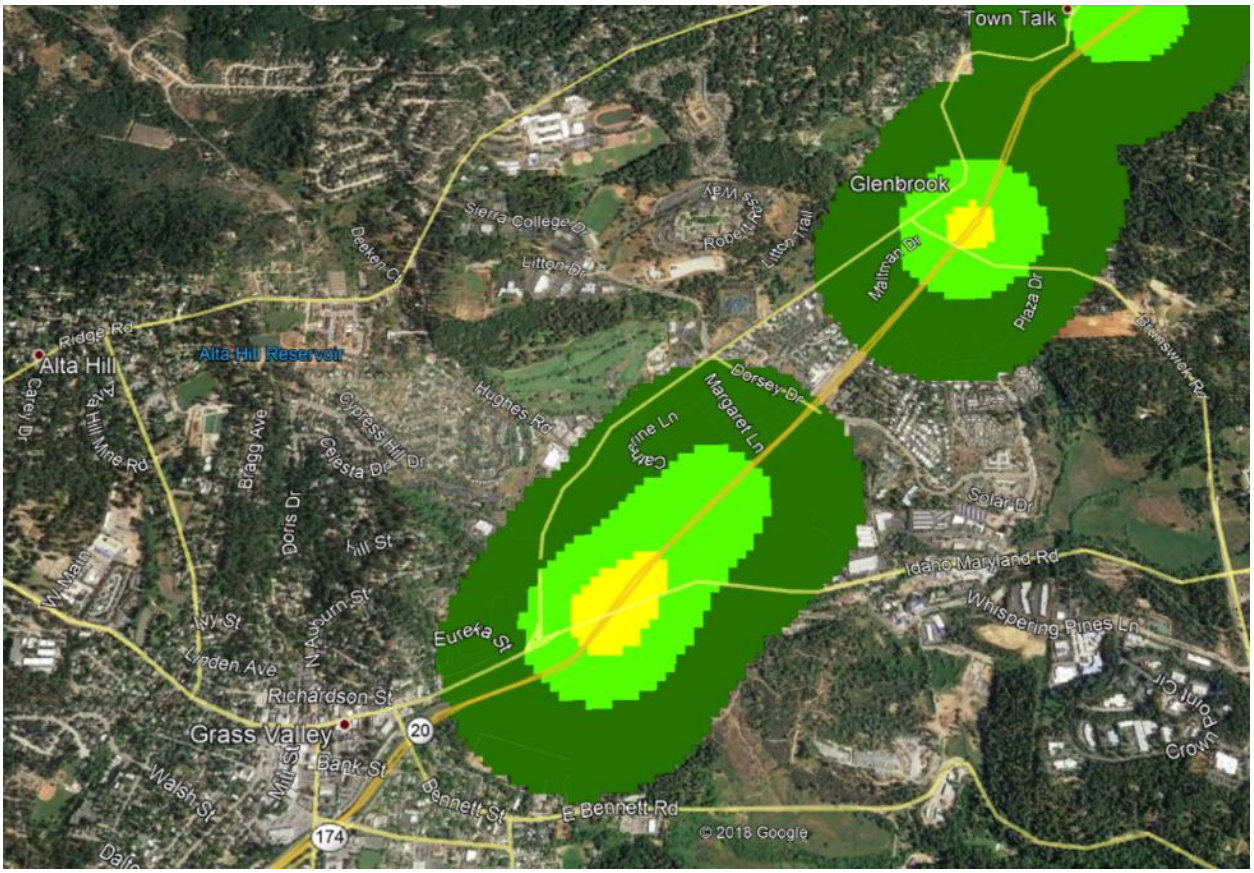
Town Talk
Glenbrook
Sierra College Dr
Litton Dr
Maltman Dr
Plaza Dr
Ridge Rd
Alta Hill
Alta Hill Reservoir
Hughes Rd
Dorsey Dr
Margaret Ln
Cypress Hill Dr
Celesta Dr
Bragg Ave
Doris Dr
Hill St
Solar Dr
Idaho Maryland Rd
Whispering Pines Ln
Eureka St
Richardson St
Grass Valley
Bank St
Mill St
Walsh St
Bennett St
E Bennett Rd
20
174
© 2018 Google


**3f**

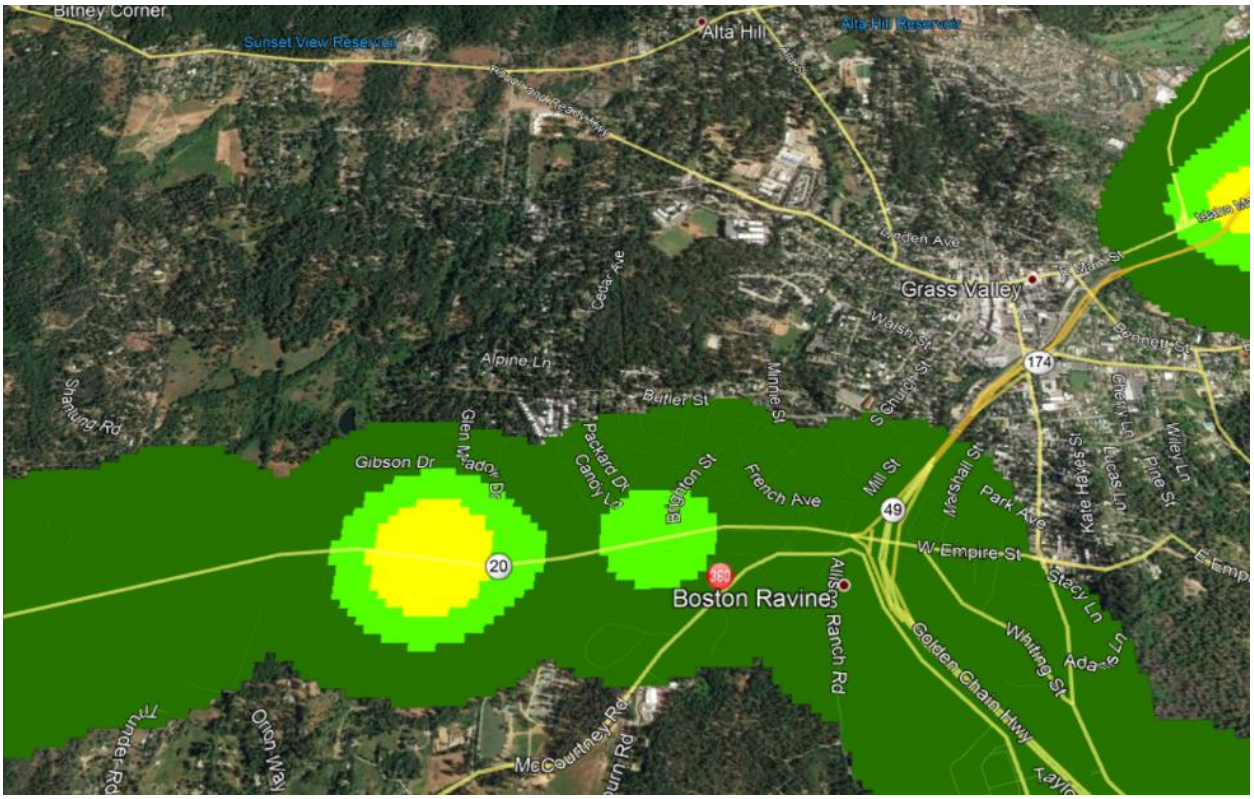
Bitney Corner
Sunset View Reservoir
Alta Hill
Alta Hill Reservoir
Grass Valley
Alpine Ln
Butler St
Gibson Dr
French Ave
Mill St
Boston Ravine
Allison Ranch Rd
Golden Chain Hwy
Whiting St
Stacy Ln
Ada St
W Empire St
Park Ave
Marshall St
Wiley Ln
Pine St
Lucas Ln
Walsh St
Church St
Minnie St
Packard Dr
Canary Ln
Glen Meadow Dr
Shanling Rd
Orton Way
McCourtney Rd
Cedar Ave
Linden Ave
20
49
174
360


**3g**

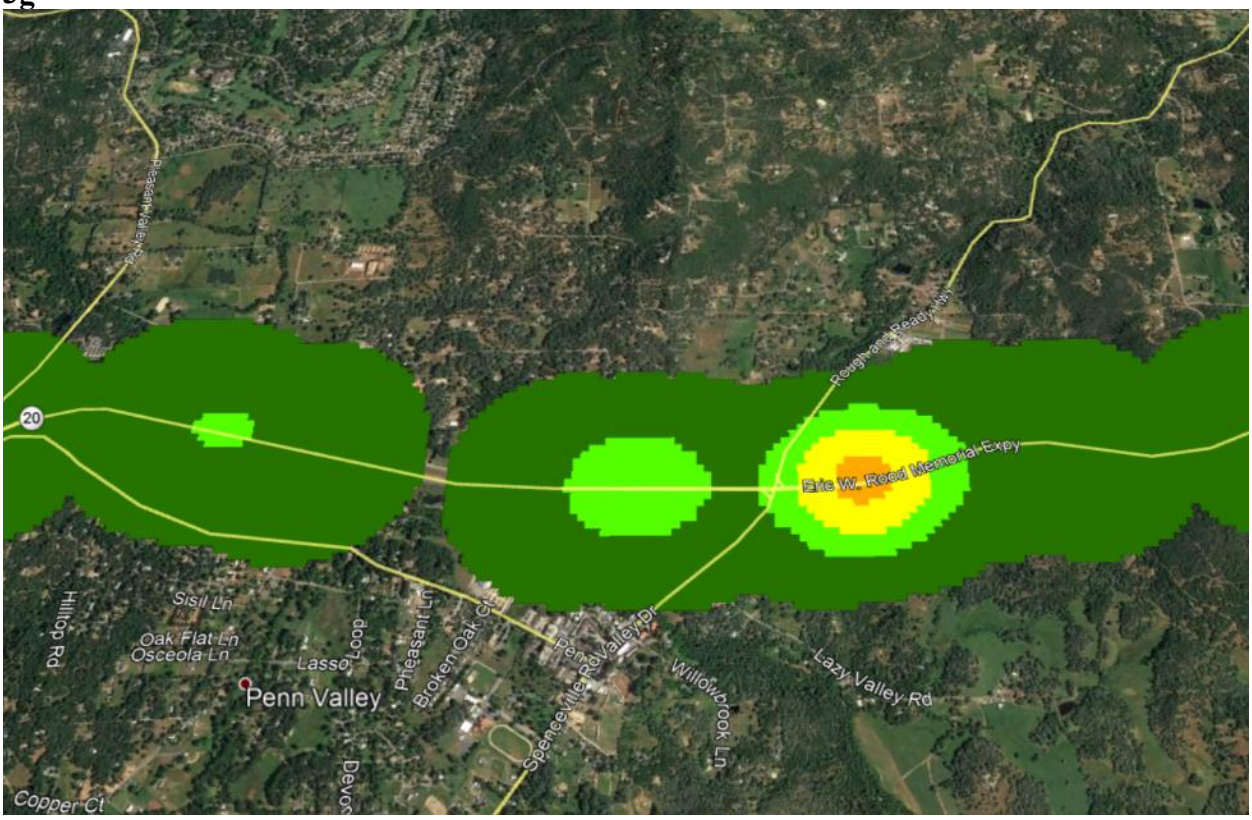
20
Eric W. Rood Memorial Expy
Roughand Ready Hwy
Penn Valley
Sisil Ln
Oak Flat Ln
Osceola Ln
Lasso Loop
Pheasant Ln
Broken Oak Ct
Penn Valley Dr
Willowbrook Ln
Lazy Valley Rd
Hilltop Rd
Copper Ct


**3h**

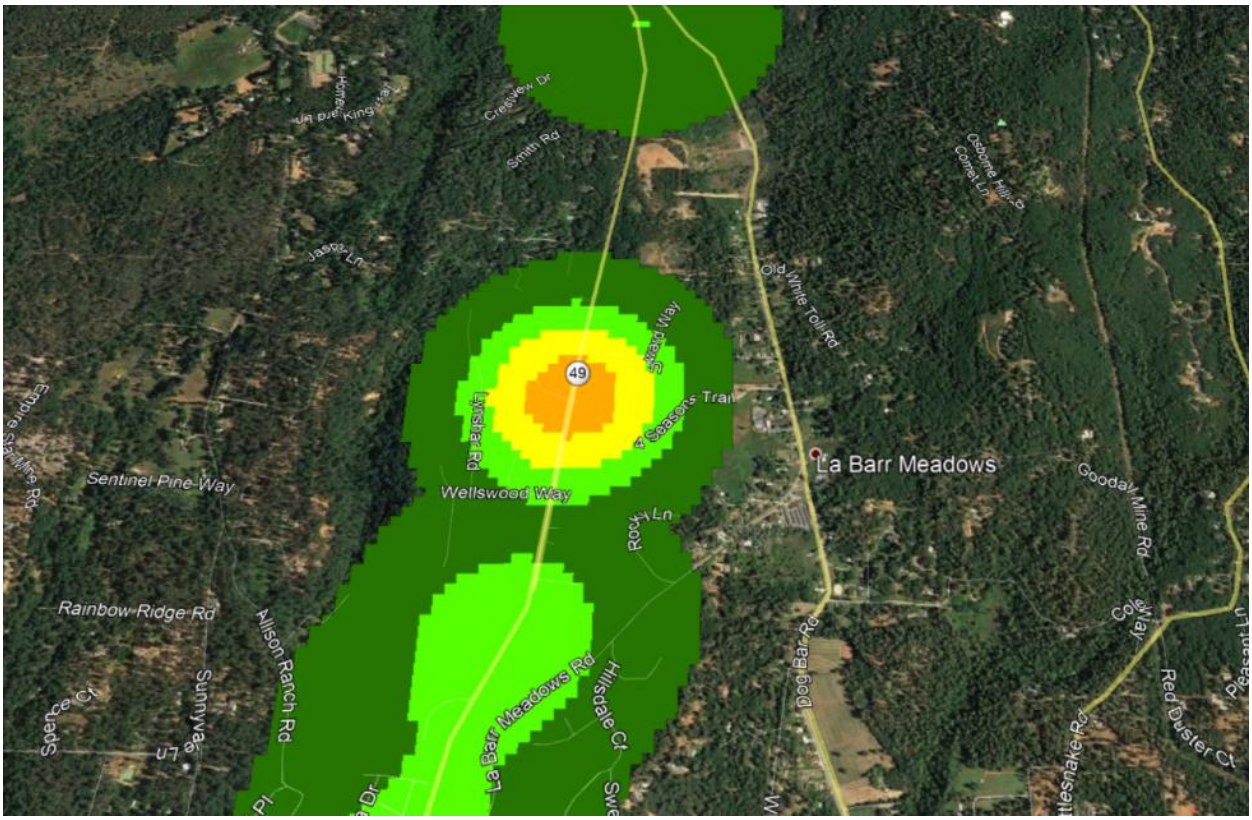
49
La Barr Meadows
Wellswood Way
Sentinel Pine Way
Rainbow Ridge Rd
Allison Ranch Rd
La Barr Meadows Rd
Hillsdale Ct
Dog Bar Rd
Old White Toll Rd
Smith Rd
Crestview Dr
Jasper Ln
Lyndar Rd
Rocky Ln
Goodall Mine Rd
Red Duster Ct
Sunnyvale Ln
Spencer Ct


**3i**

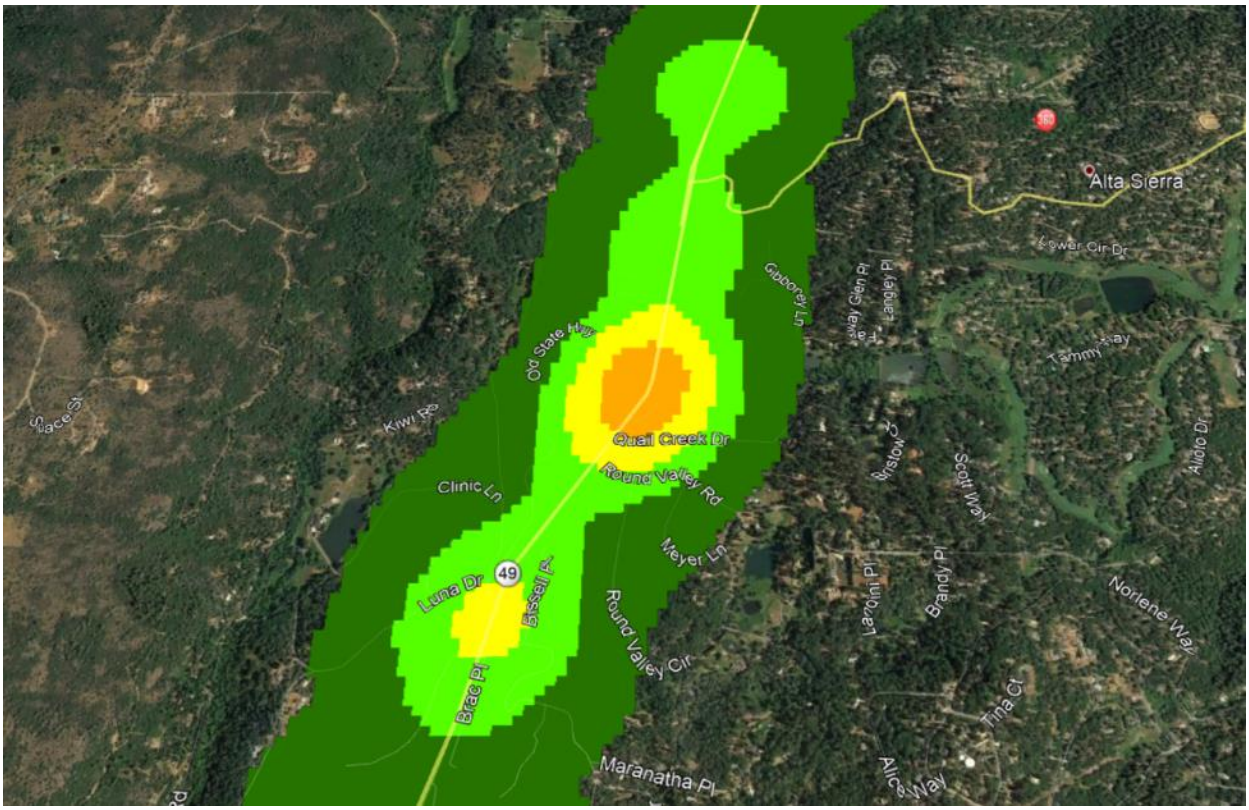
Alta Sierra
Gibbons Ln
Old State Hwy
Kiwi Rd
Quail Creek Dr
Round Valley Rd
Clinic Ln
Luna Dr
49
Bissell Pl
Meyer Ln
Round Valley Cir
Brad Pl
Maranatha Pl
Scott Way
Brandy Pl
Norlene Way
Tina Ct
Alice Way
Tammy Way
Aldo Dr


**3j**

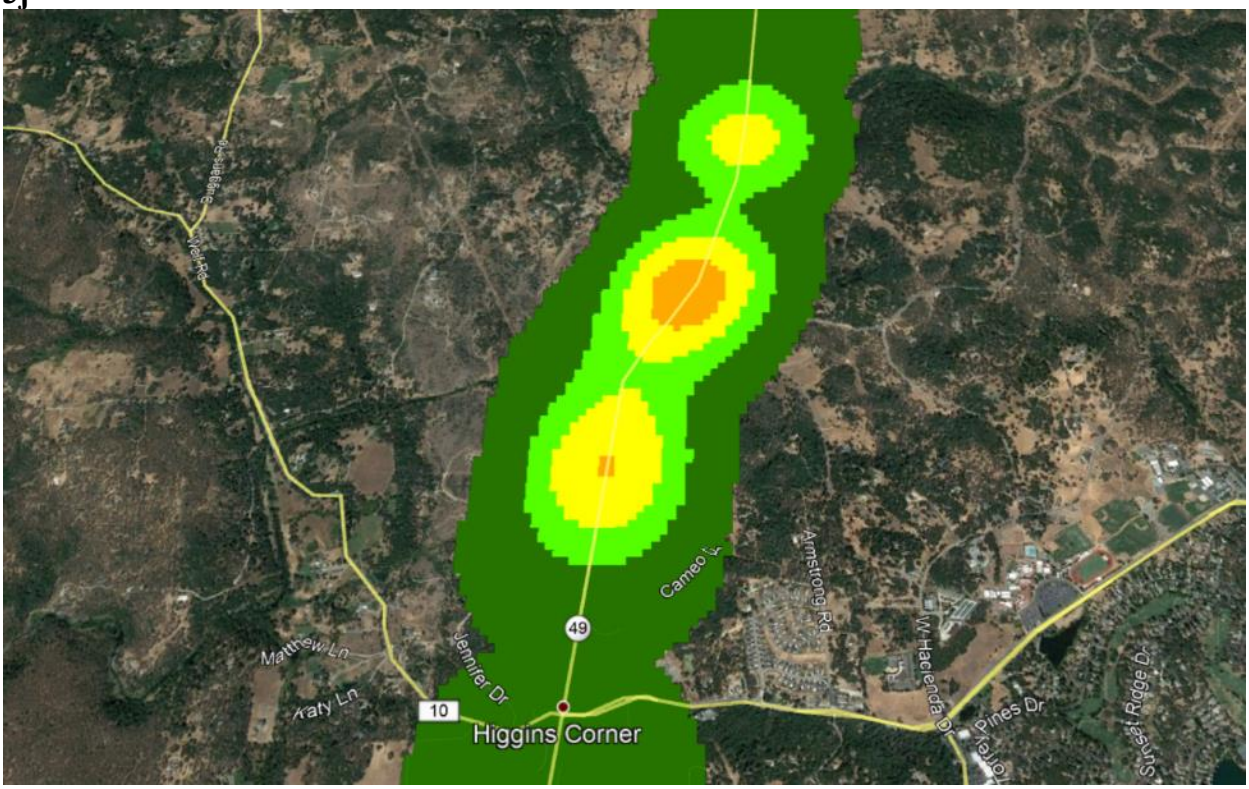
Matthew Ln
Jennifer Dr
Araty Ln
10
49
Higgins Corner
Armstrong Rd
W Hacienda Dr
Pines Dr
Sunset Ridge Dr


**3k**

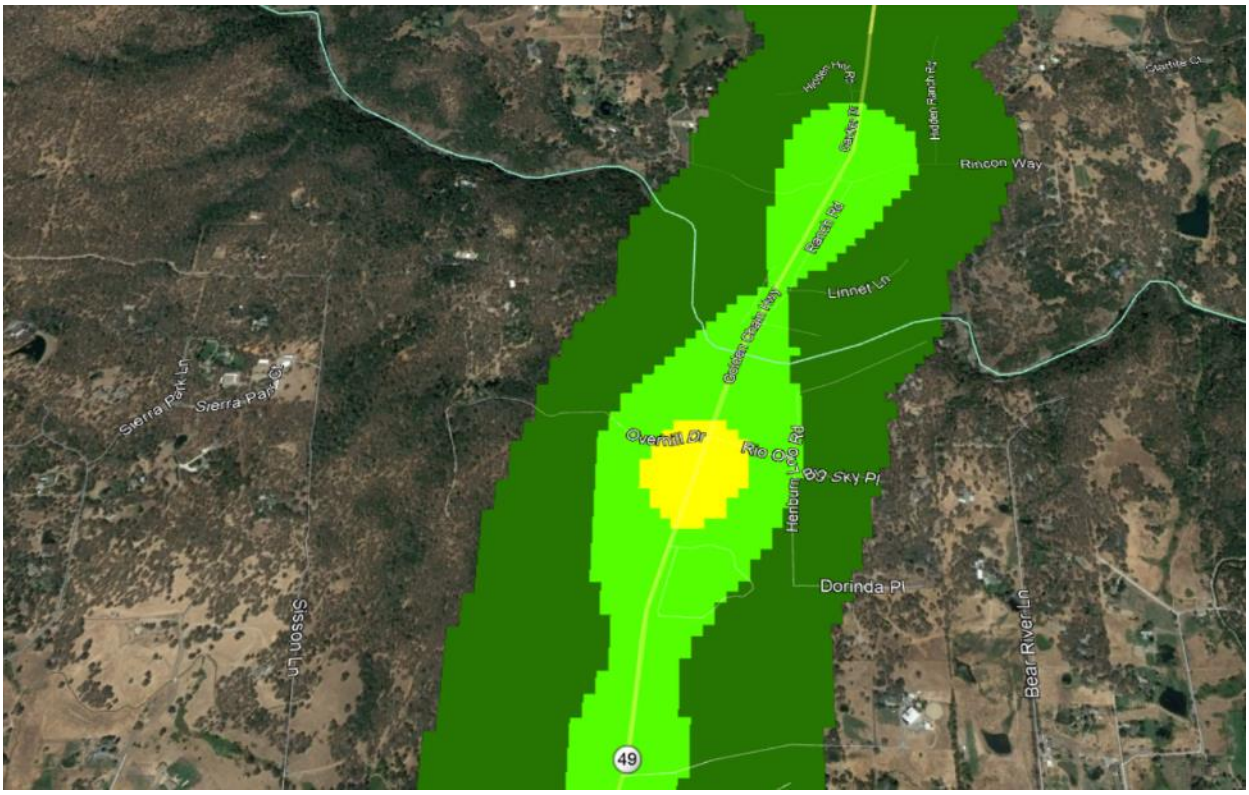
Rincon Way
Linnet Ln
Overhill Dr
Rio Oso Rd
Dorinda Pl
Bear River Ln
Sierra Park Ln
Sierra Park Ct
Sisson Ln
49


**3l**

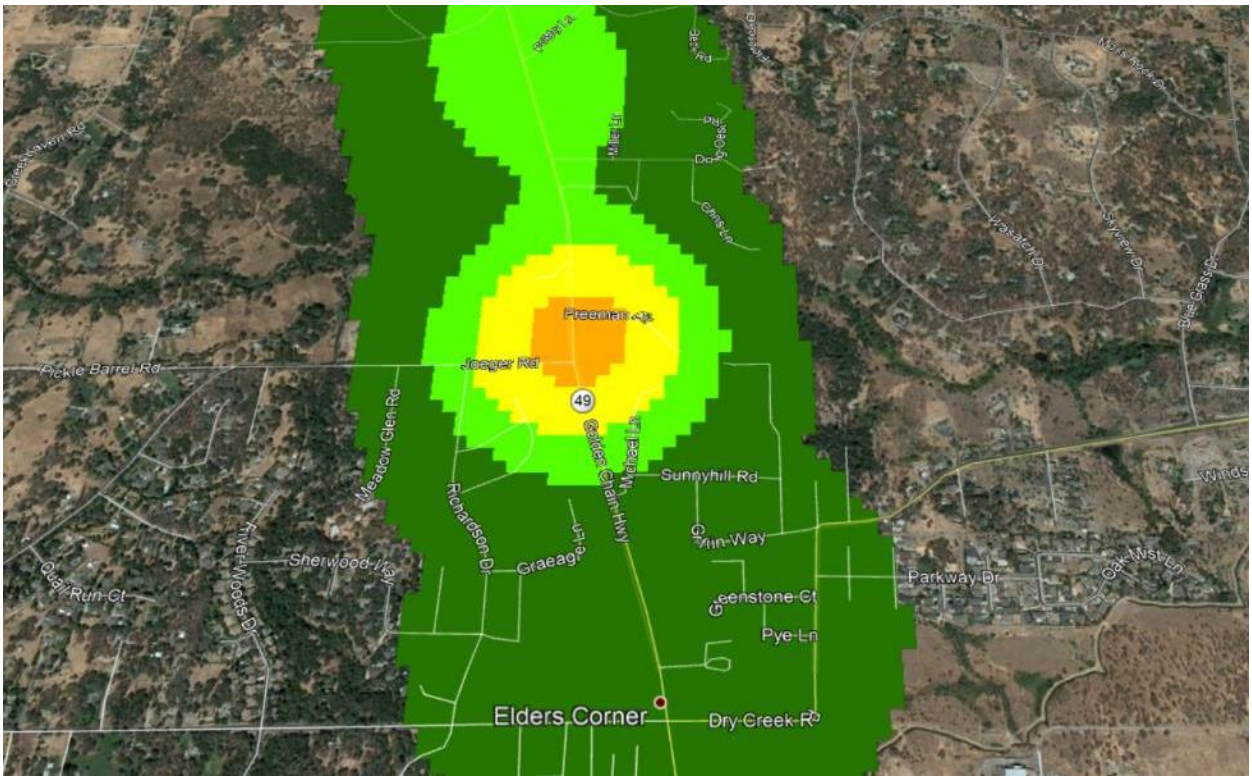
Freeman
Jaeger Rd
Pickle Barrel Rd
49
Meadow Glen Rd
Richardson Dr
Golden Chain Hwy
Sunnyhill Rd
Graeagle Ln
Sherwood Way
River Woods Dr
Quail Run Ct
Parkway Dr
Pye Ln
Elders Corner
Dry Creek Rd

**3m**

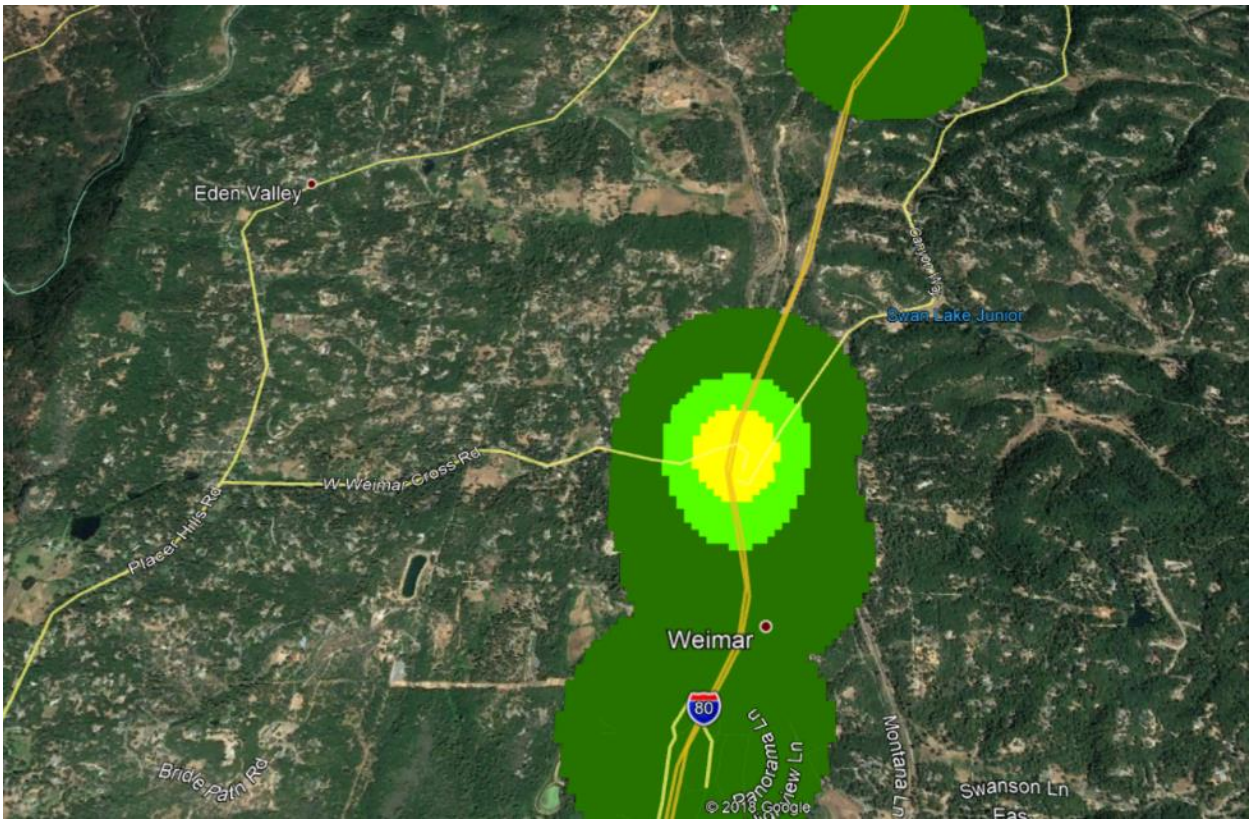

Eden Valley
W Weimar Cross Rd
Placer Hills Rd
Weimar
80
Bridle Path Rd
Swanson Ln
Swan Lake Junior

**CRASH DATA DISTRICT 4**

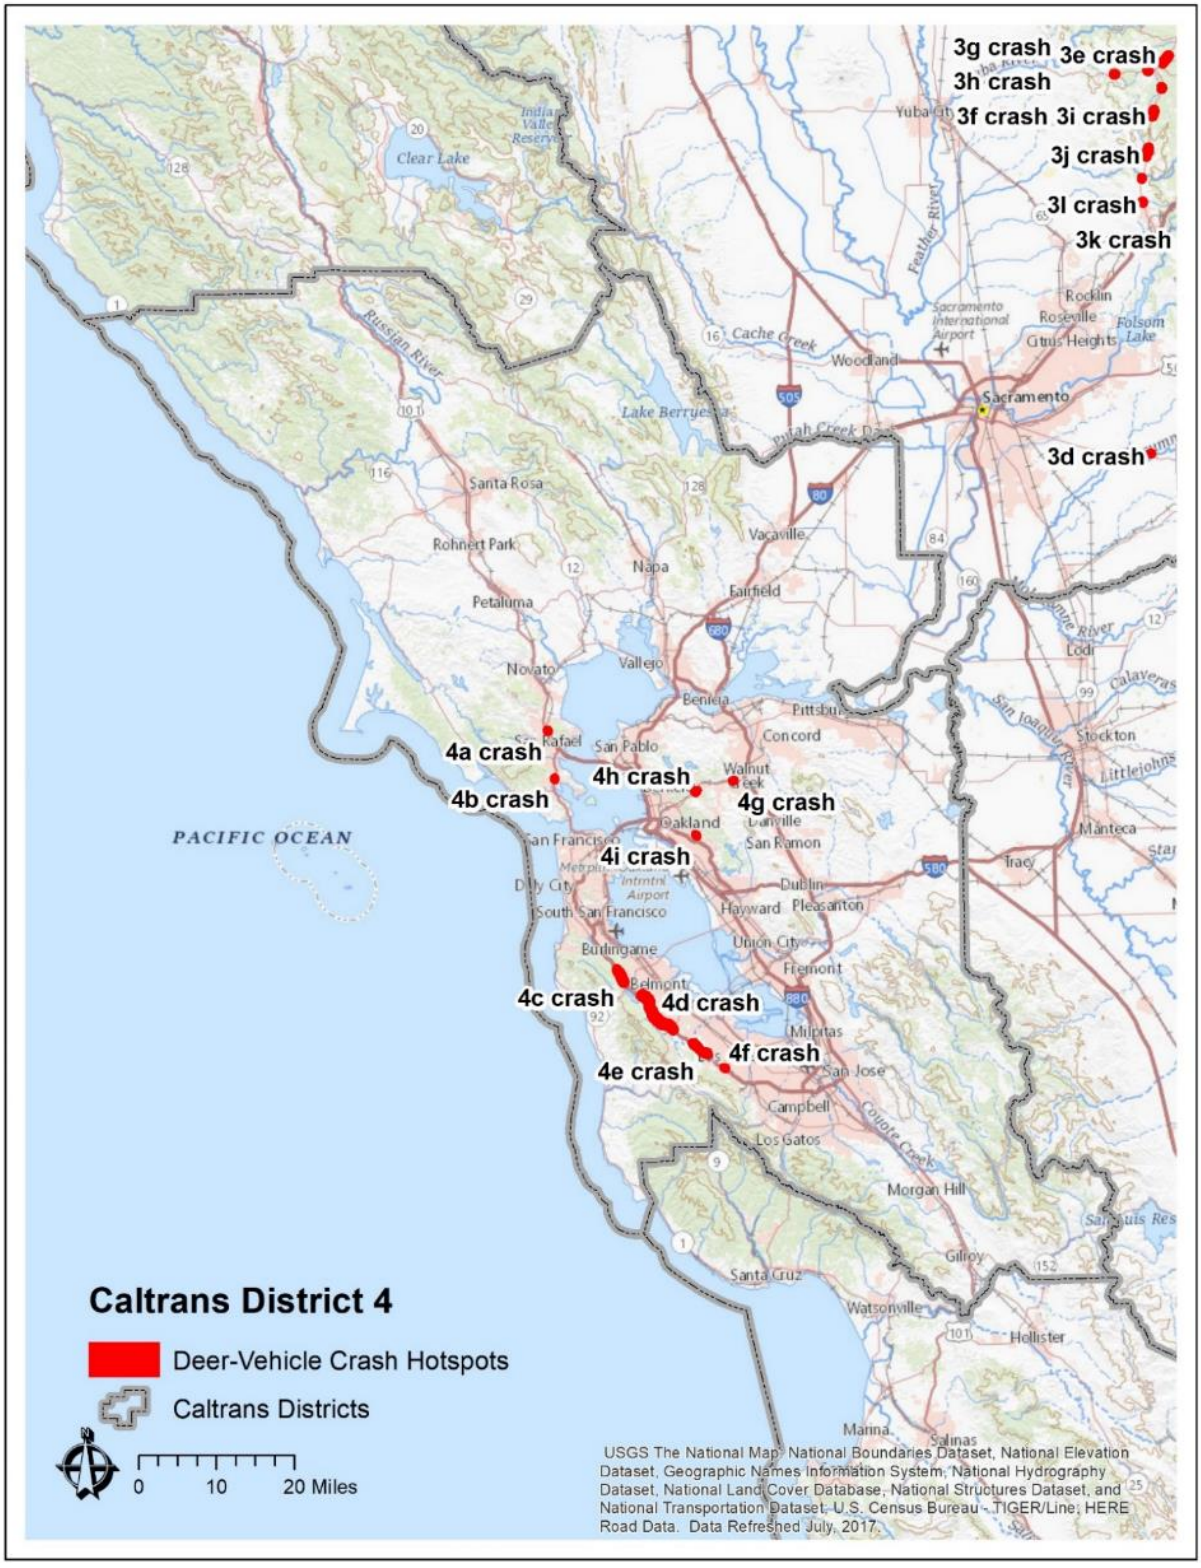



Hot spots in District 4 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**4a**

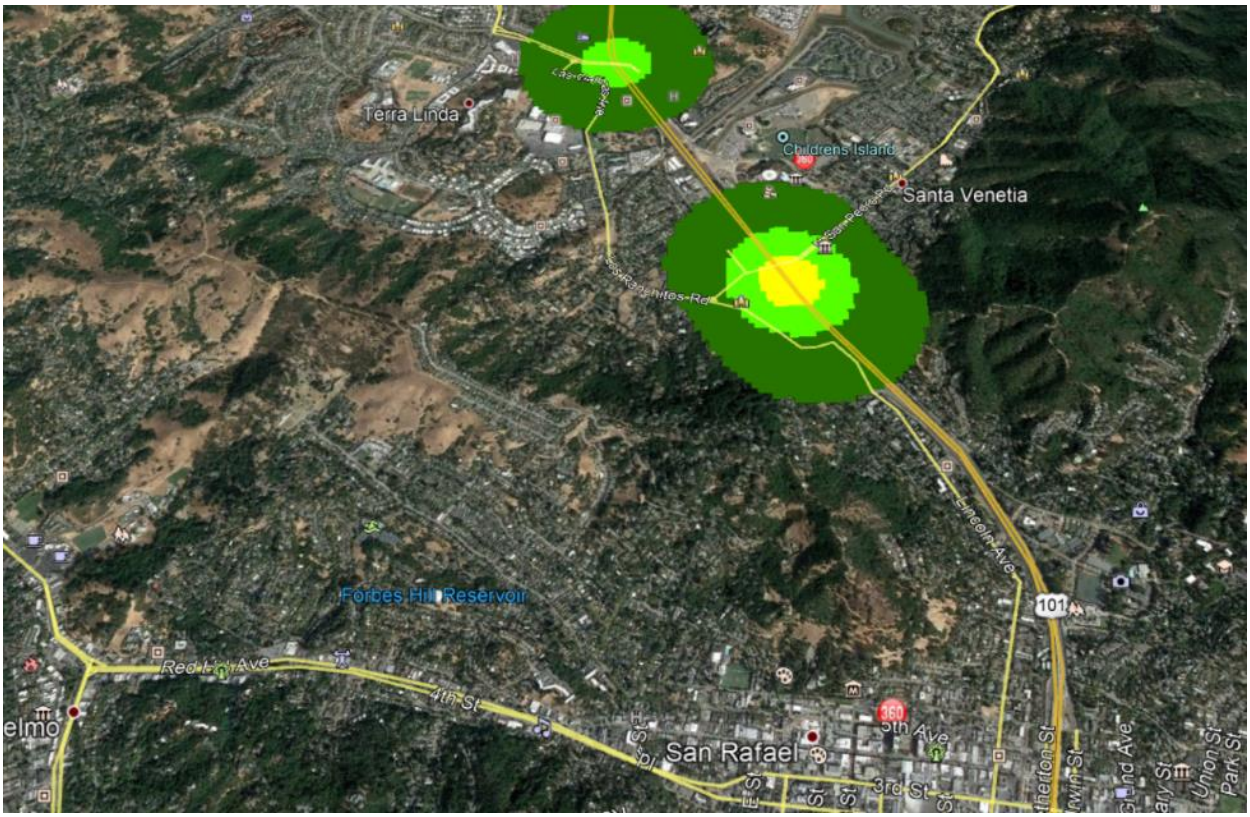
Terra Linda
Childrens Island
Santa Venetia
Lincoln Ave
Forbes Hill Reservoir
Red Hill Ave
4th St
San Rafael
5th Ave
3rd St
101
160


**4b**

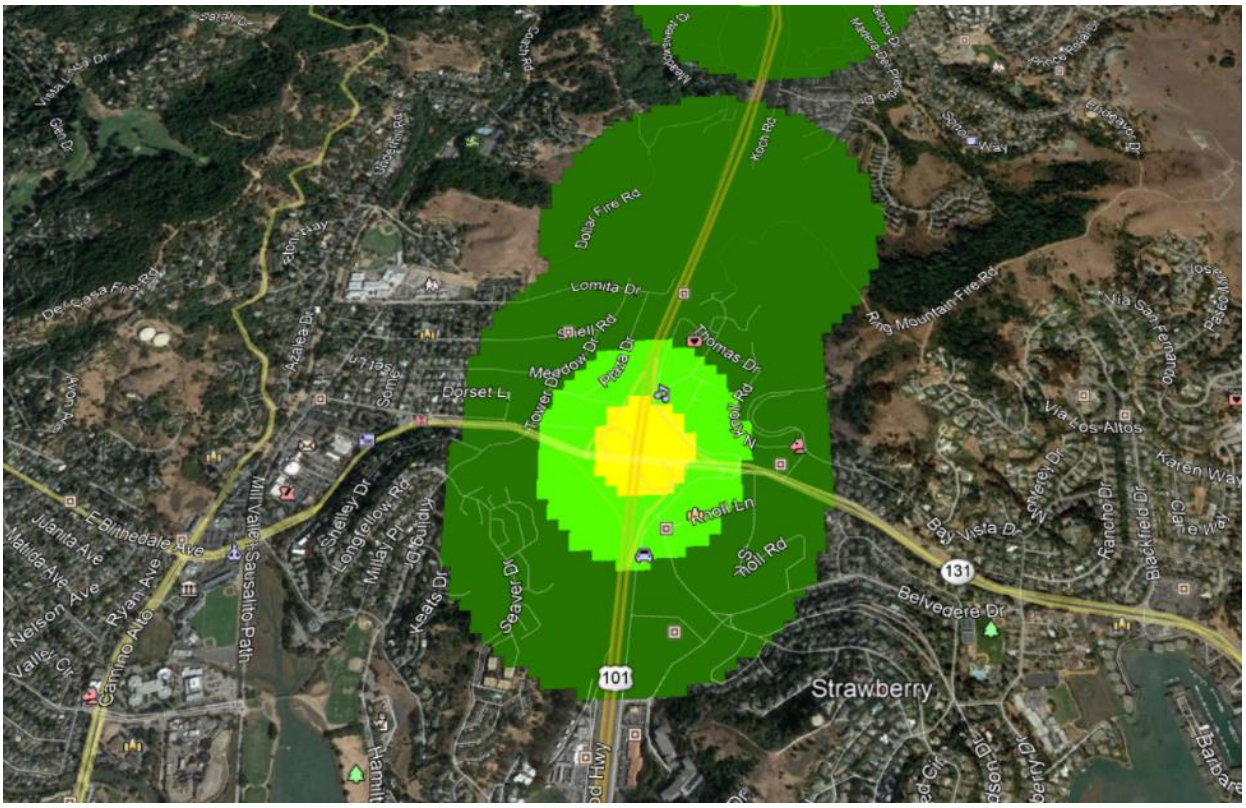
Dollar Fire Rd
Koch Rd
Lomita Dr
Shell Rd
Meadow Dr
Prada Dr
Thomas Dr
N Knoll Rd
Knoll Ln
S Knoll Rd
Dorset Ln
Ring Mountain Fire Rd
Via Los Altos
Via San Fernando
Karen Way
Bay Vista Dr
Rancho Dr
Blackfield Dr
Belvedere Dr
131
101
Strawberry
E Blithedale Ave
Juanita Ave
Matilda Ave
Nelson Ave
Ryan Ave
Camino Alto
Valley Cir
Mill Valley-Sausalito Path
Shelley Dr
Longfellow Rd
Millay Pl
Kipling Dr
Keats Dr
Seaver Dr
Azalea Dr
Sonora Dr
Deer Casa Fire Rd

**4c**


Lower Crystal Springs Reservoir
Dam Reservoir
Crystal Springs Rd
Peninsula Rd
Highlands-Baywood Park
280
35
Junipero Serra Fwy


**4d**

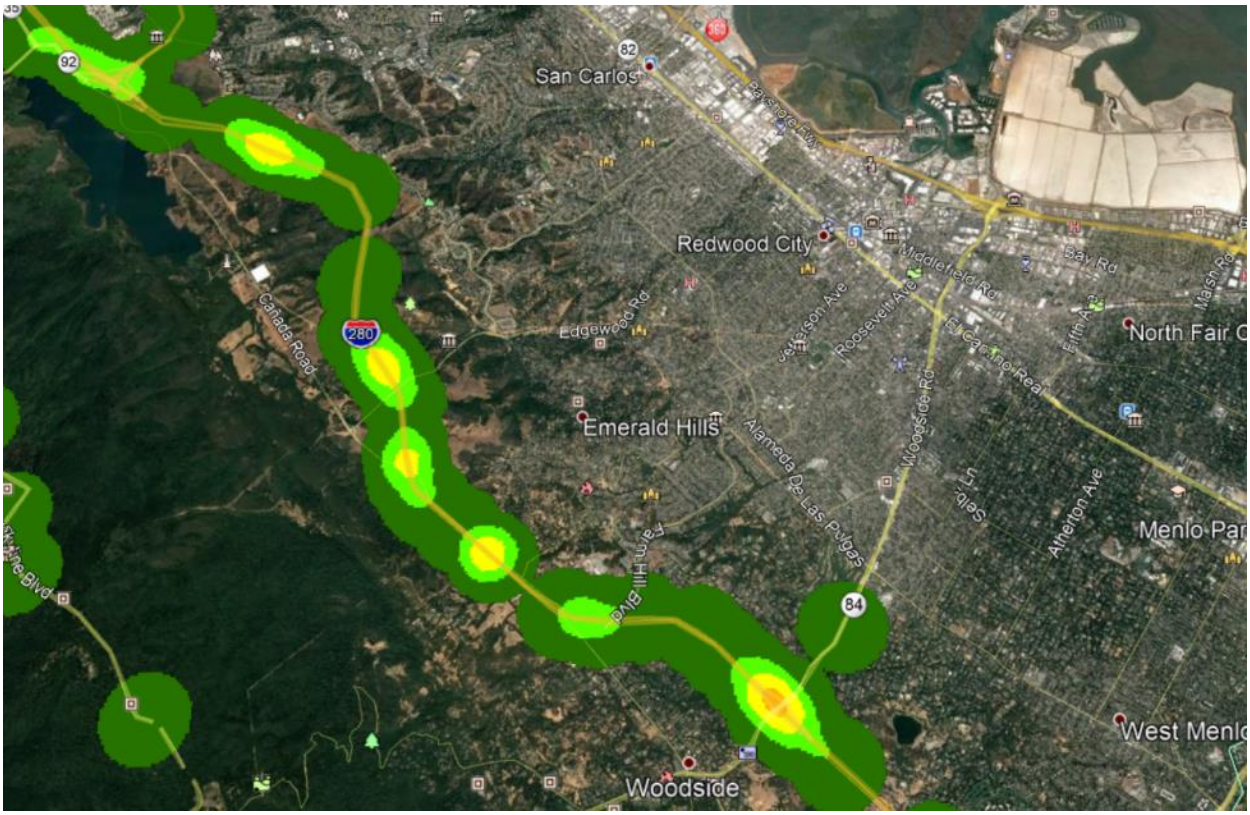
San Carlos
Redwood City
Edgewood Rd
Canada Road
280
Emerald Hills
Alameda De Las Pulgas
Woodside Rd
Roosevelt Ave
Middlefield Rd
Bay Rd
El Camino Real
Atherton Ave
Menlo Par
West Menlo
Woodside
84
92
82

**4e**


West Menlo Park
Stanford
Junipero Serra Blvd
Stanford Ave
G3
280
Westridge Dr
Alpine Rd


**4f**

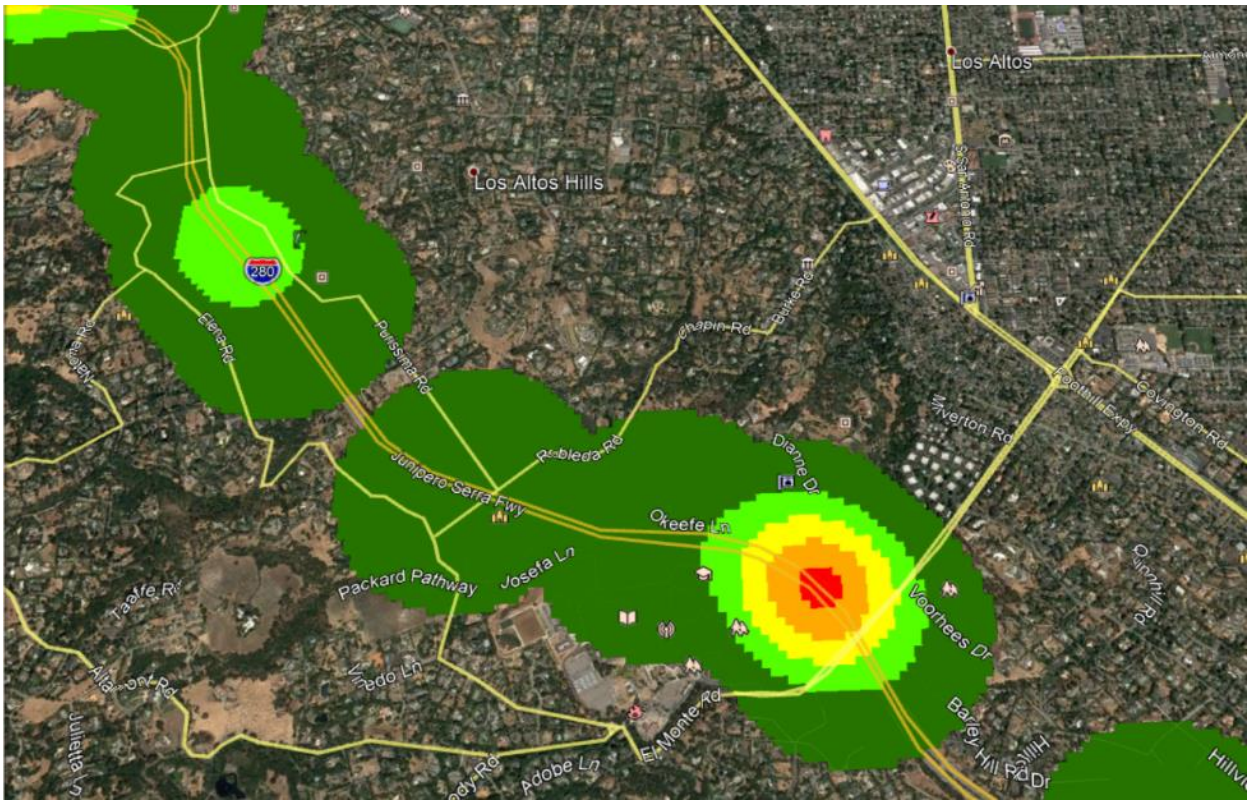
Los Altos
Los Altos Hills
280
Elena Rd
Purissima Rd
Chapin Rd
Burke Rd
Moody Rd
Arboretum Rd
Fremont Rd
Covington Rd
Foothill Expy
Inverton Rd
Rebleda Rd
Dianne Dr
Junipero Serra Fwy
Okeefe Ln
Josefa Ln
Packard Pathway
Taafe Rd
Alta Vista Rd
Julietta Ln
Arbedo Ln
El Monte Rd
Adobe Ln
Voorhees Dr
Barley Hill Rd
Dr

**4g**


Brown Dr
Rancho Way
Cuarto Rd
Park Access Rd
Stanley Blvd
Via Gabarda Way
Pleasant Hill Cir
Palomares St
Circle Creek Dr
Elizabeth St
Deer Hill Rd
24
Old Tunnel Rd
Mela Ct
Leland Reservoir
Mars Ct
Hampton Rd
Marlene Dr
Alta Ln
Buchan Dr
Pleasant Hill Rd
Mt Diablo Blvd
Walnut Dr
Moraga Blvd
Stanwood Ln
Condit
Sunset Loop
El Curtola Blvd
Fresno Dr


**4h**

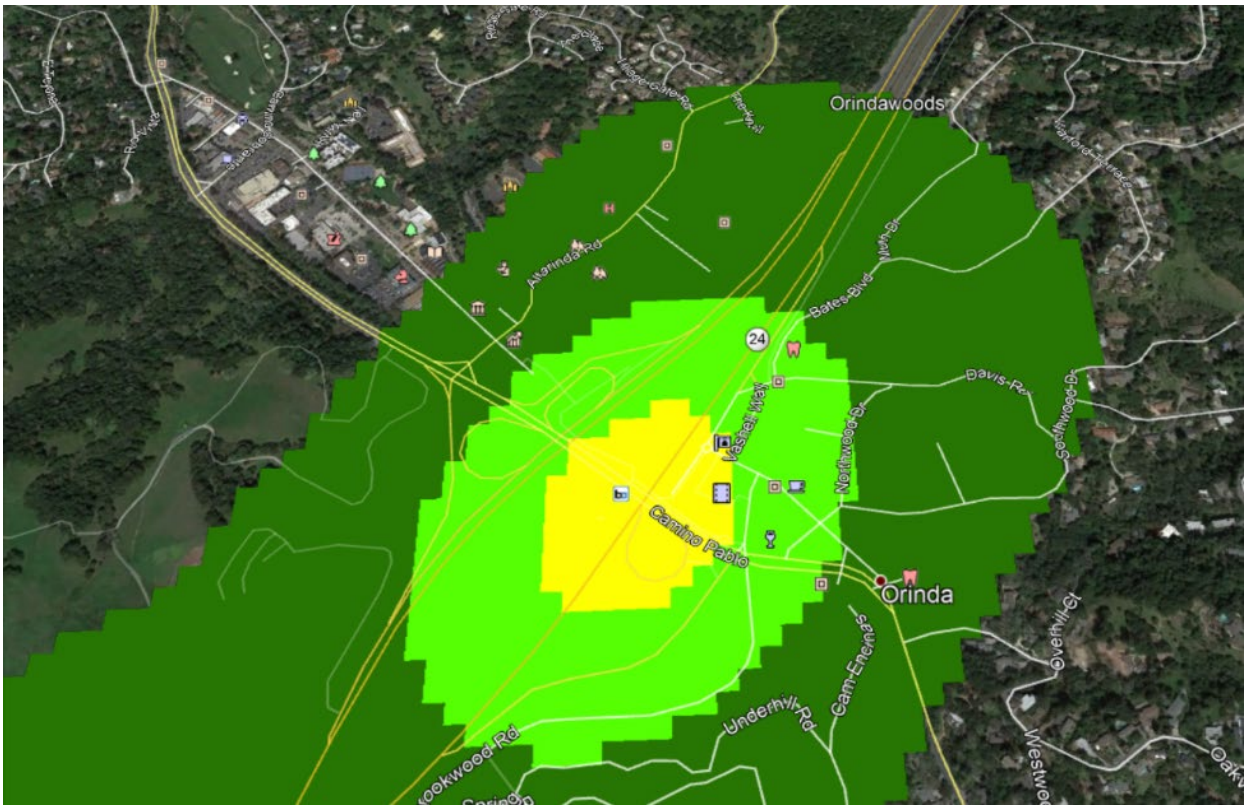
Orindawoods
Bates Blvd
Davis Rd
Camino Pablo
Orinda
Underhill Rd
Cam Emeno
Overhill Dr
Northwood Dr
Southwood Dr
Brookwood Rd
24

**4i**



Woodminster
Crestmont
Redwood Heights
Thirtyninth Avenue Reservoir
Rise Ave
Anderson Ave
Dunsmuir Ave
Detroit Ave
Jordan Rd
Victor Ave
Magee Ave
Loma Vista Ave
35th Ave
39th Ave
Vale Ave
Carson St
Gregory St
Creighton Way
Serpentine Prairie Trail
Chaabourne Way
Fisher Dr
Sereno Cir
Belfast Ave
Mountain Blvd
Freeway
13

**CRASH DATA DISTRICT 5**

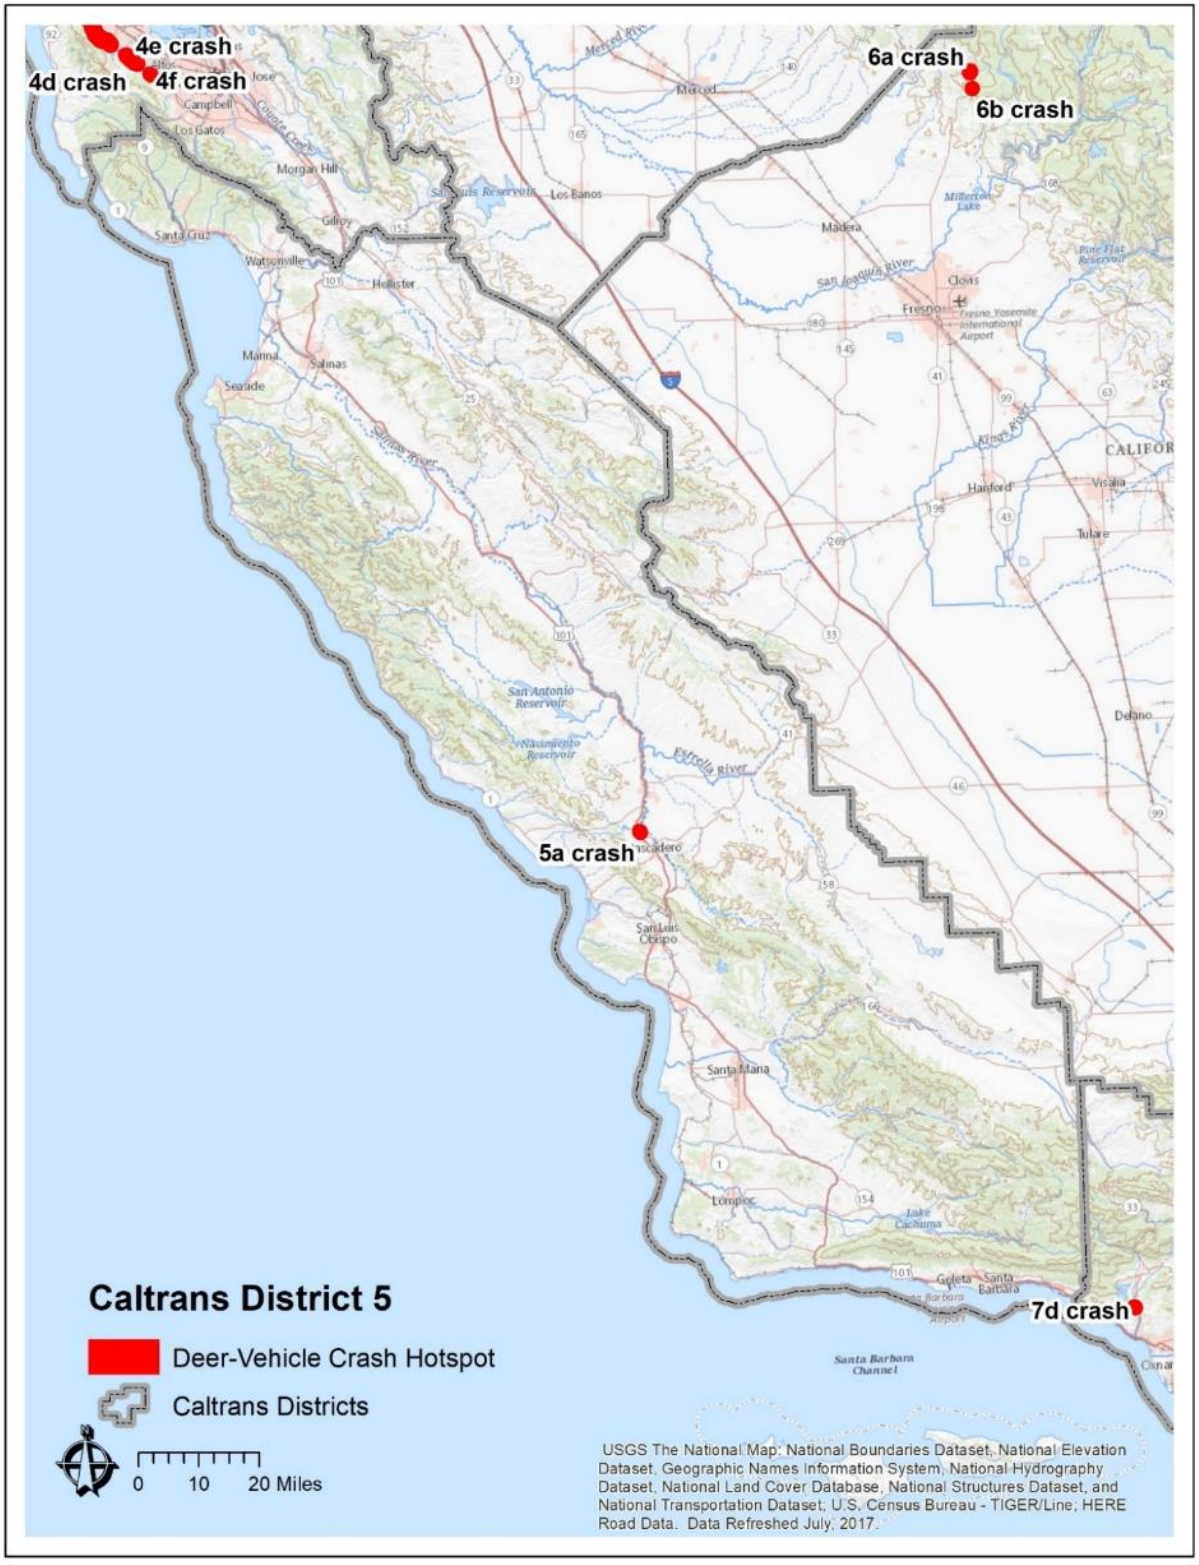



Hot spots in District 5 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**5a**

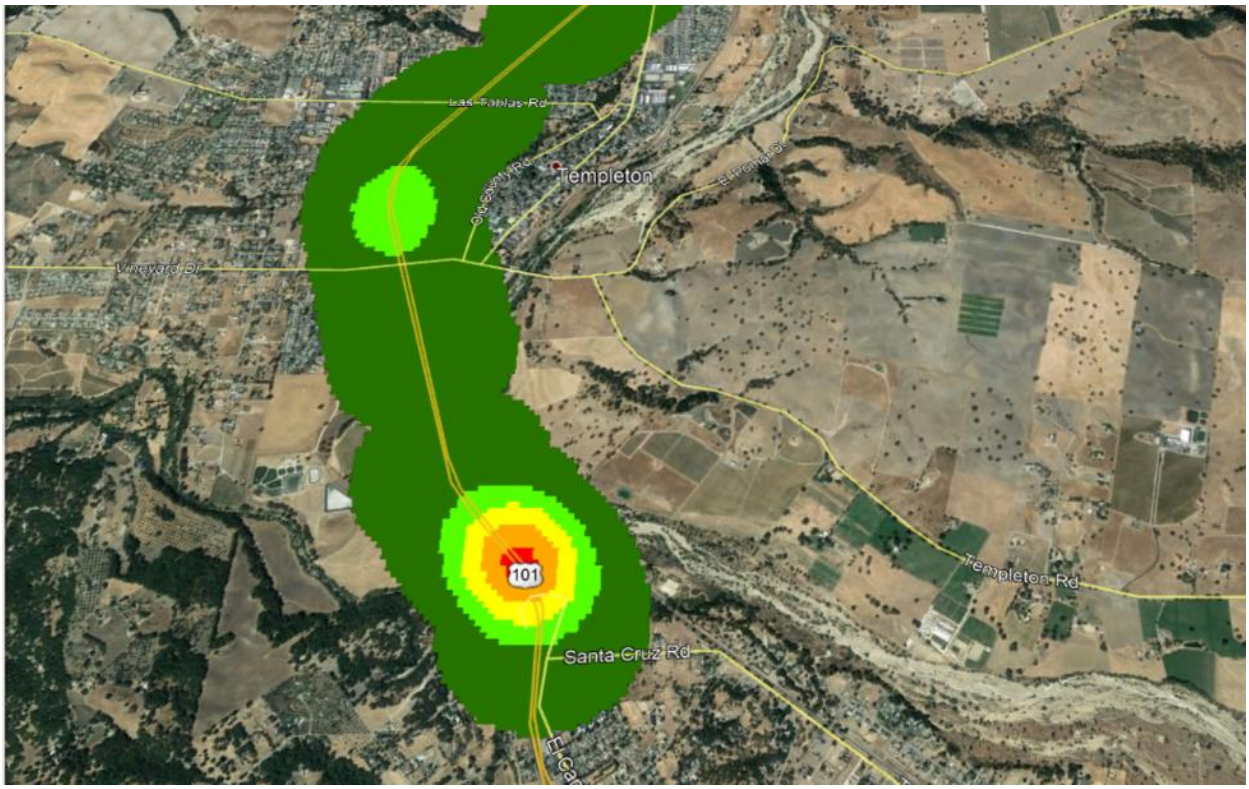

Las Palmas Rd
Templeton
Vineyard Dr
101
Templeton Rd
Santa Cruz Rd

**CRASH DATA DISTRICT 6**

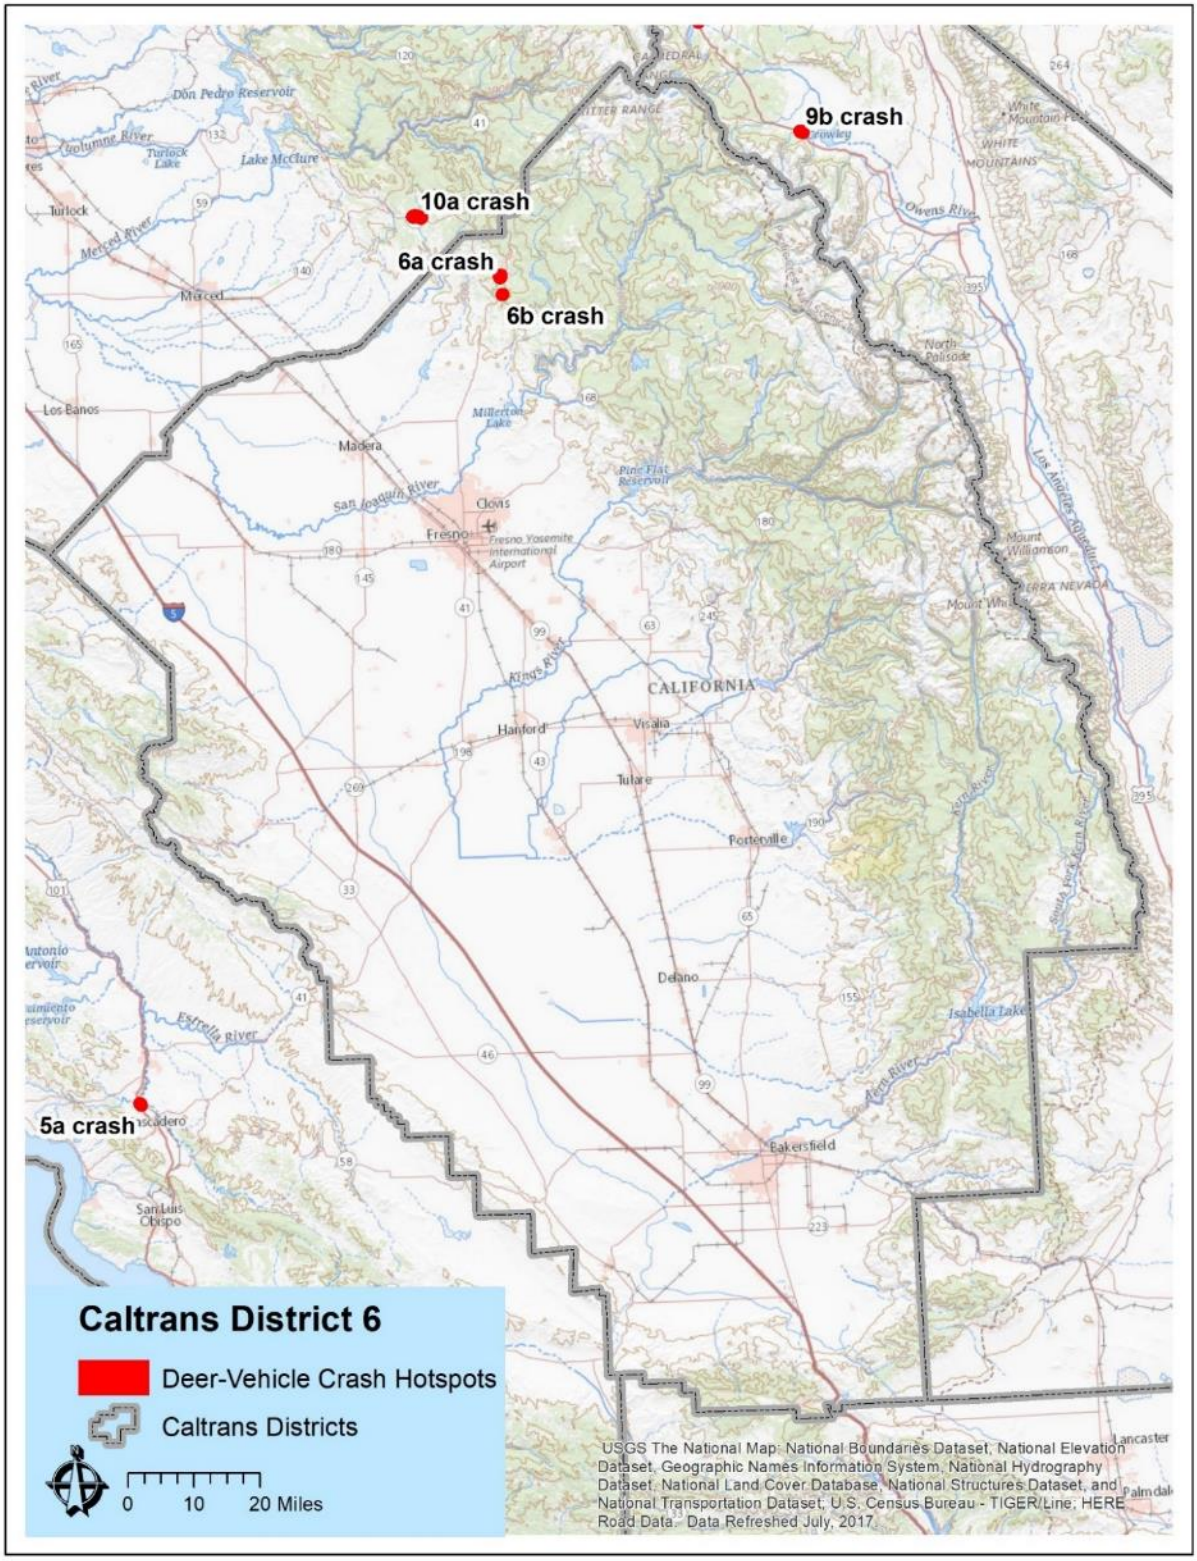



Hot spots in District 6 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**6a**

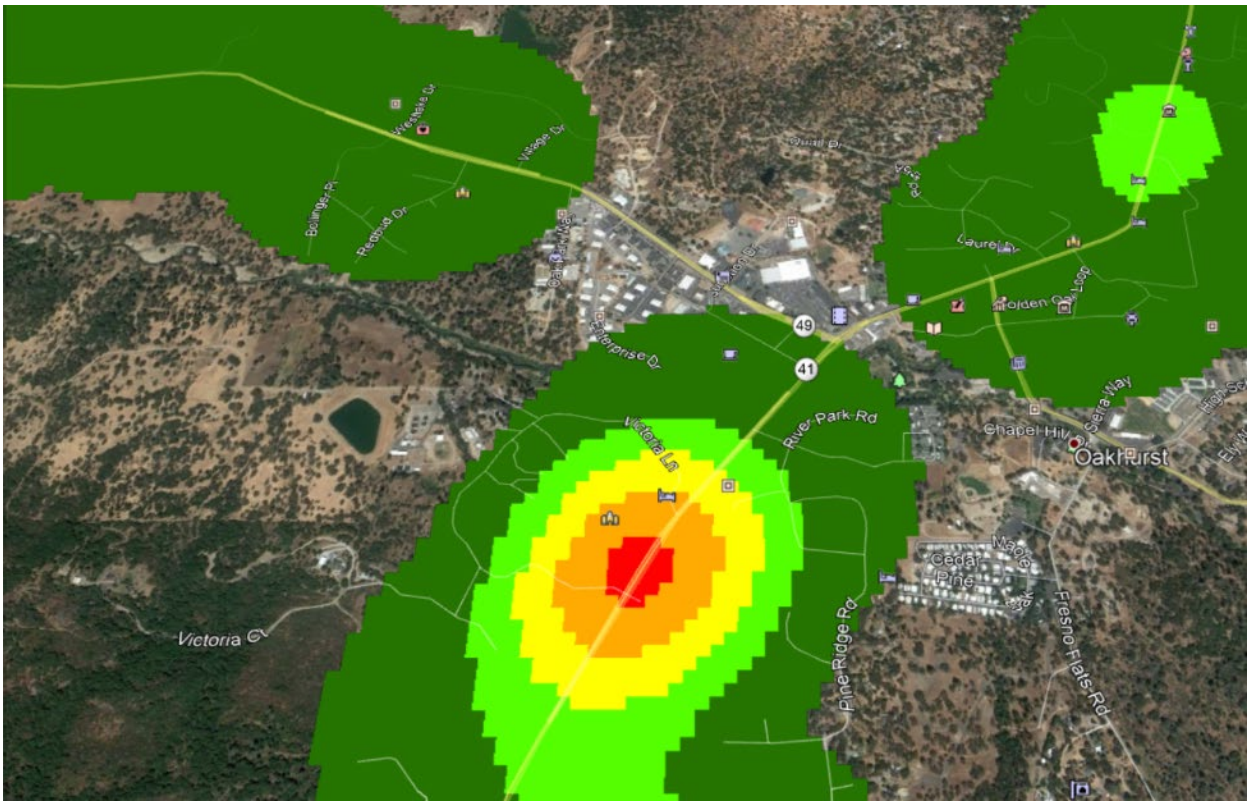
Victoria Ct
Victoria Ln
River Park Rd
Pine Ridge Rd
Fresno Flats Rd
Oakhurst
Cedar Pine
Sierra Way
Laurel Dr
Golden Oak Loop
Enterprise Dr
Village Dr
Bowman Pl
Redbud Dr
49
41

**6b**

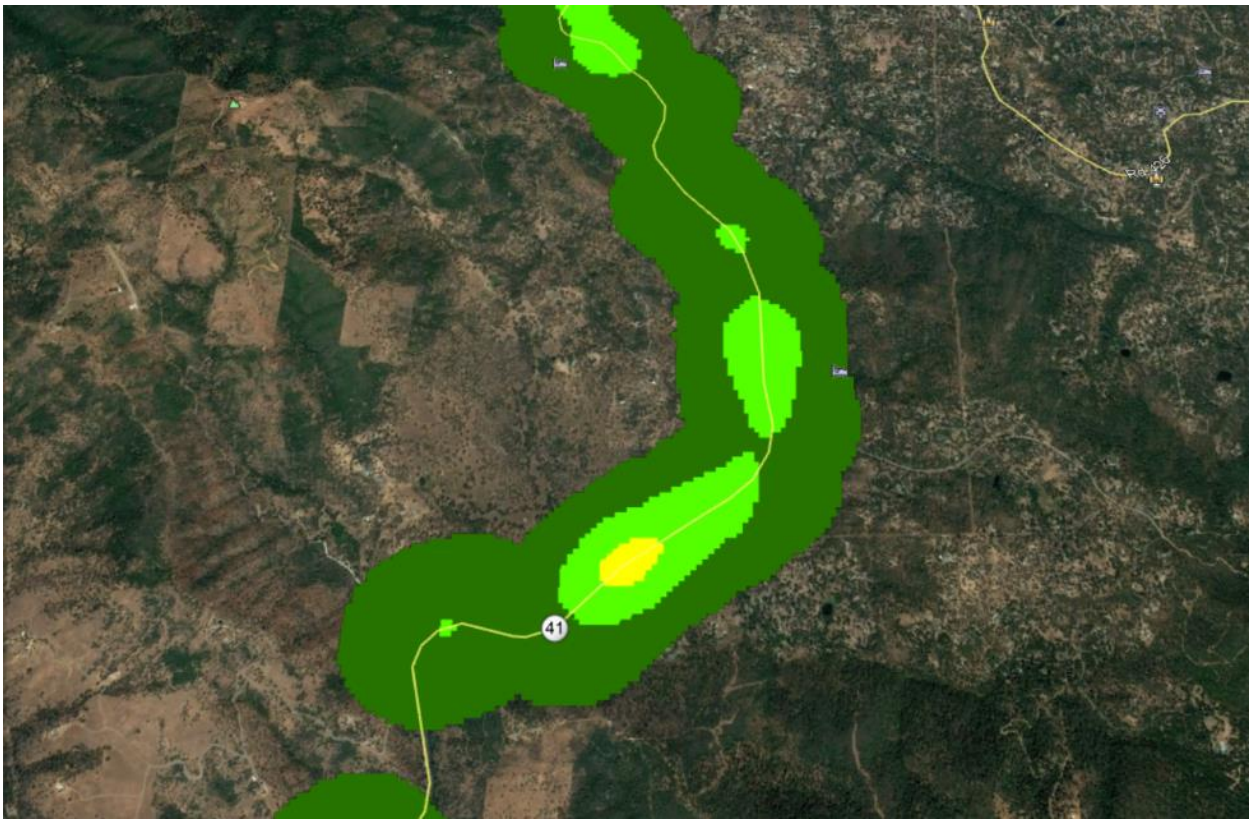


**CRASH DATA DISTRICT 7**





Hot spots in District 7 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**7a**

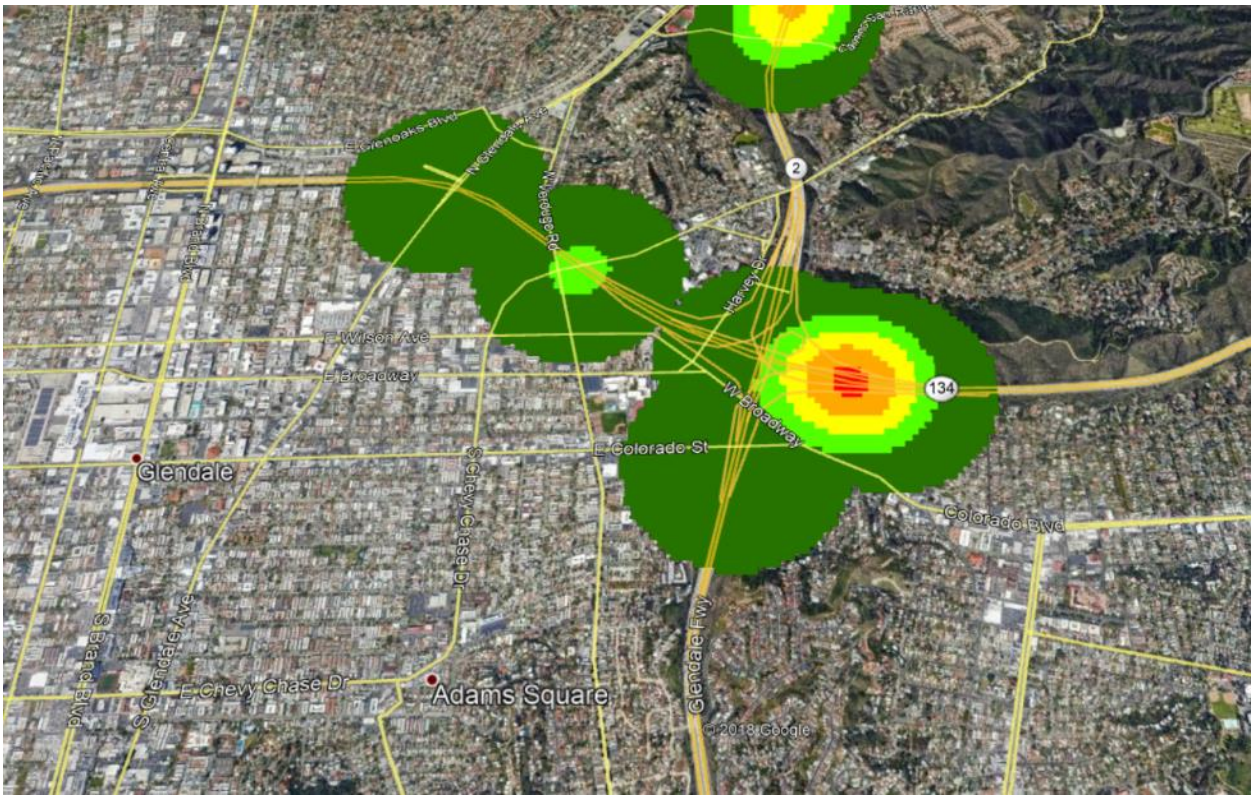
E Glenoaks Blvd
N Glendale Ave
N Brand Blvd
Harvey Dr
2
E Wilson Ave
E Broadway
W Broadway
134
E Colorado St
Glendale
S Glendale Ave
S Brand Blvd
E Chevy Chase Dr
Adams Square
Glendale Fwy
Colorado Blvd
©2018 Google


**7b**

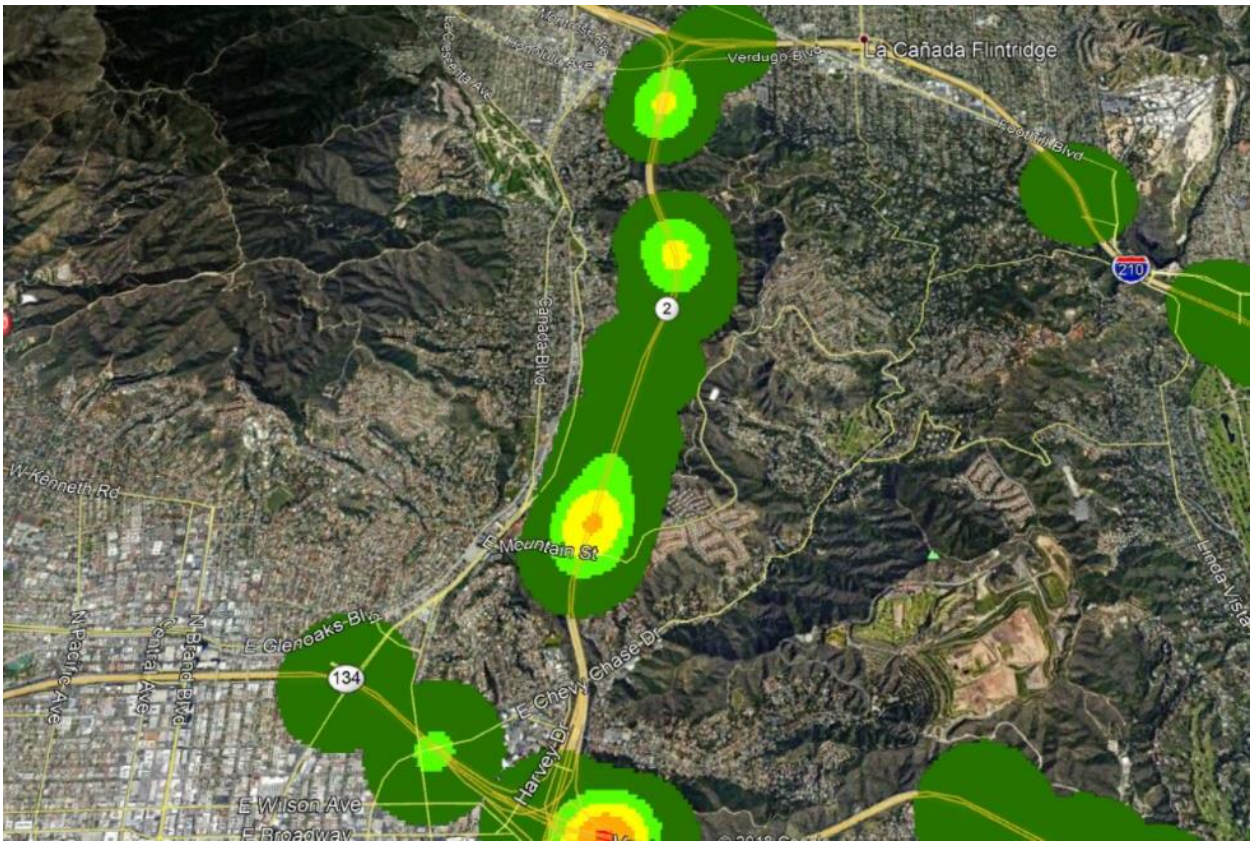
La Cañada Flintridge
Verdugo Blvd
Foothill Blvd
210
2
Canada Blvd
W Kenneth Rd
E Mountain St
E Glenoaks Blvd
134
N Pacific Ave
N Brand Blvd
Central Ave
E Chevy Chase Dr
Harvey Dr
E Wilson Ave
E Broadway
Linda Vista


**7c**

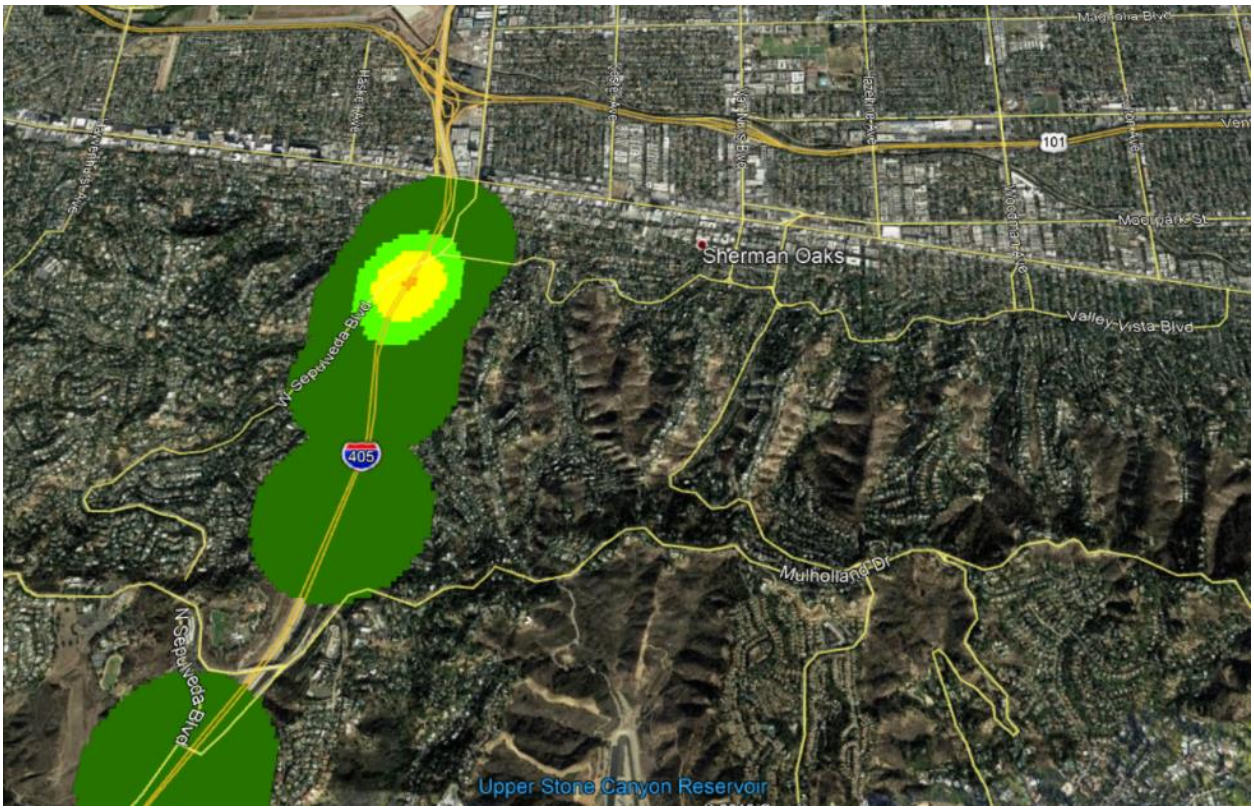
Magnolia Blvd
Hazeltine Ave
Van Nuys Blvd
Woodman Ave
101
Sherman Oaks
Valley Vista Blvd
W Sepulveda Blvd
405
Mulholland Dr
N Sepulveda Blvd
Upper Stone Canyon Reservoir


**7d**

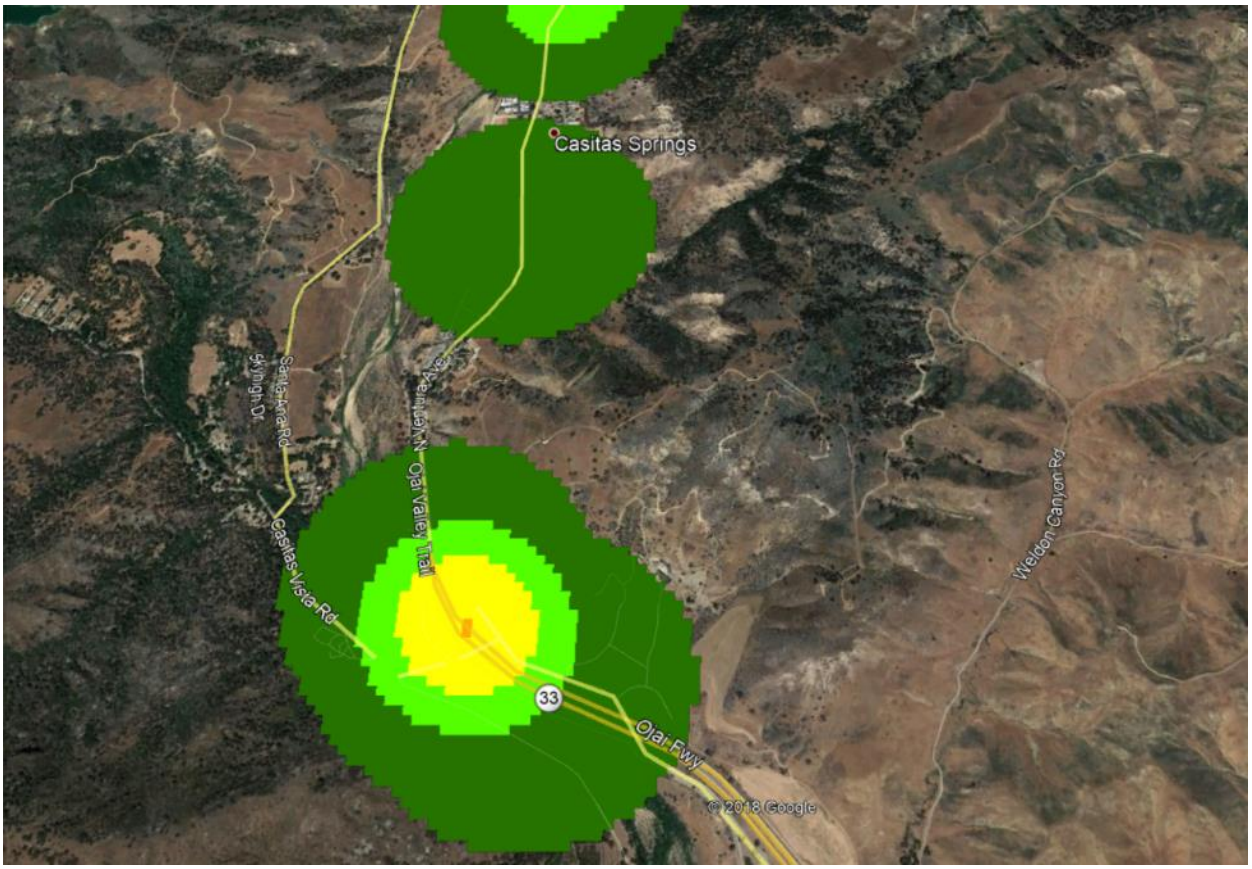
Casitas Springs
Santa Ana Rd
Skyline Dr
N Ventura Ave
Ojai Valley Trail
Casitas Vista Rd
Weldon Canyon Rd
33
Ojai Fwy
© 2018 Google

**7e**

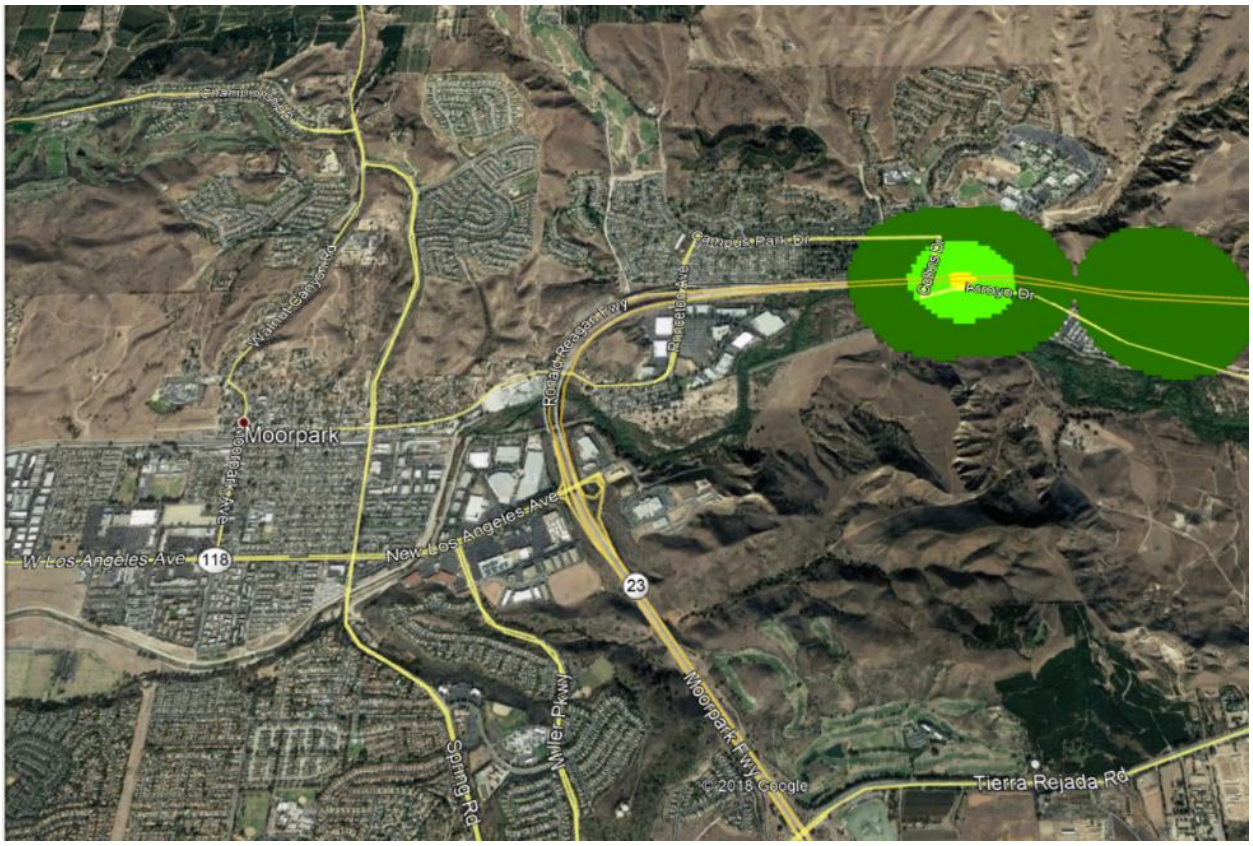

Moorpark
W Los Angeles Ave
118
New Los Angeles Ave
Ronald Reagan Fwy
Campus Park Dr
Arroyo Dr
Walnut Canyon Rd
Spring Rd
Mile Pkwy
Moorpark Fwy
23
Tierra Rejada Rd
© 2018 Google

**CRASH DATA DISTRICT 8**

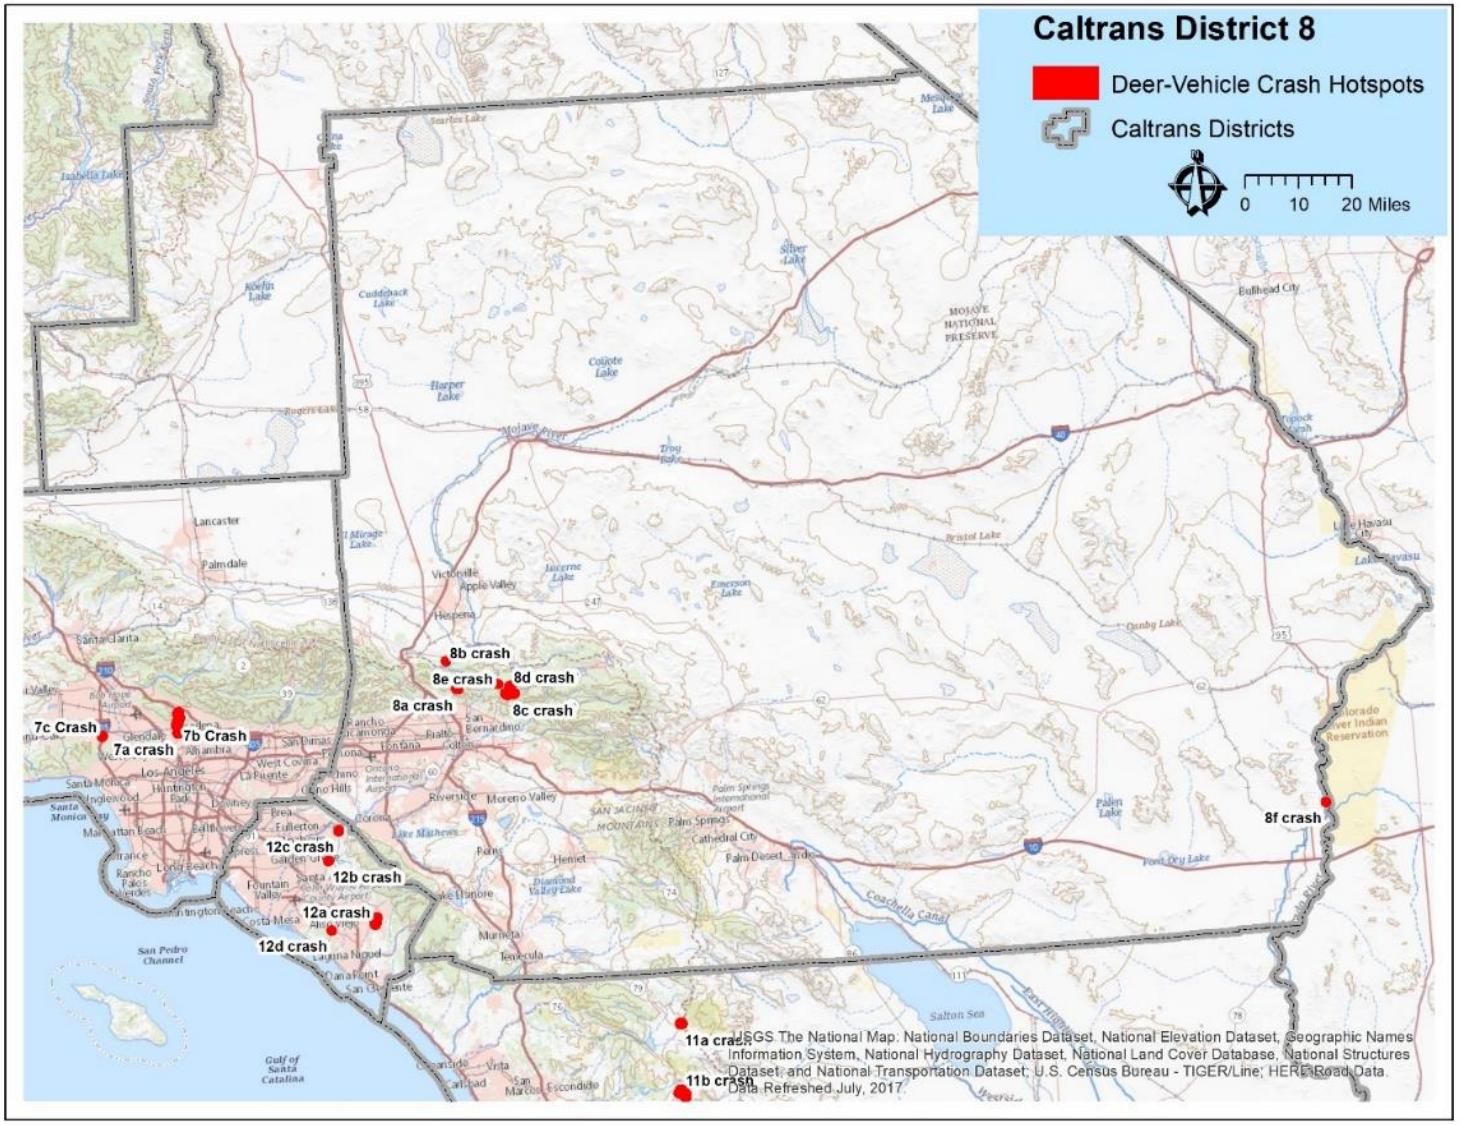



Hot spots in District 8 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**8a**

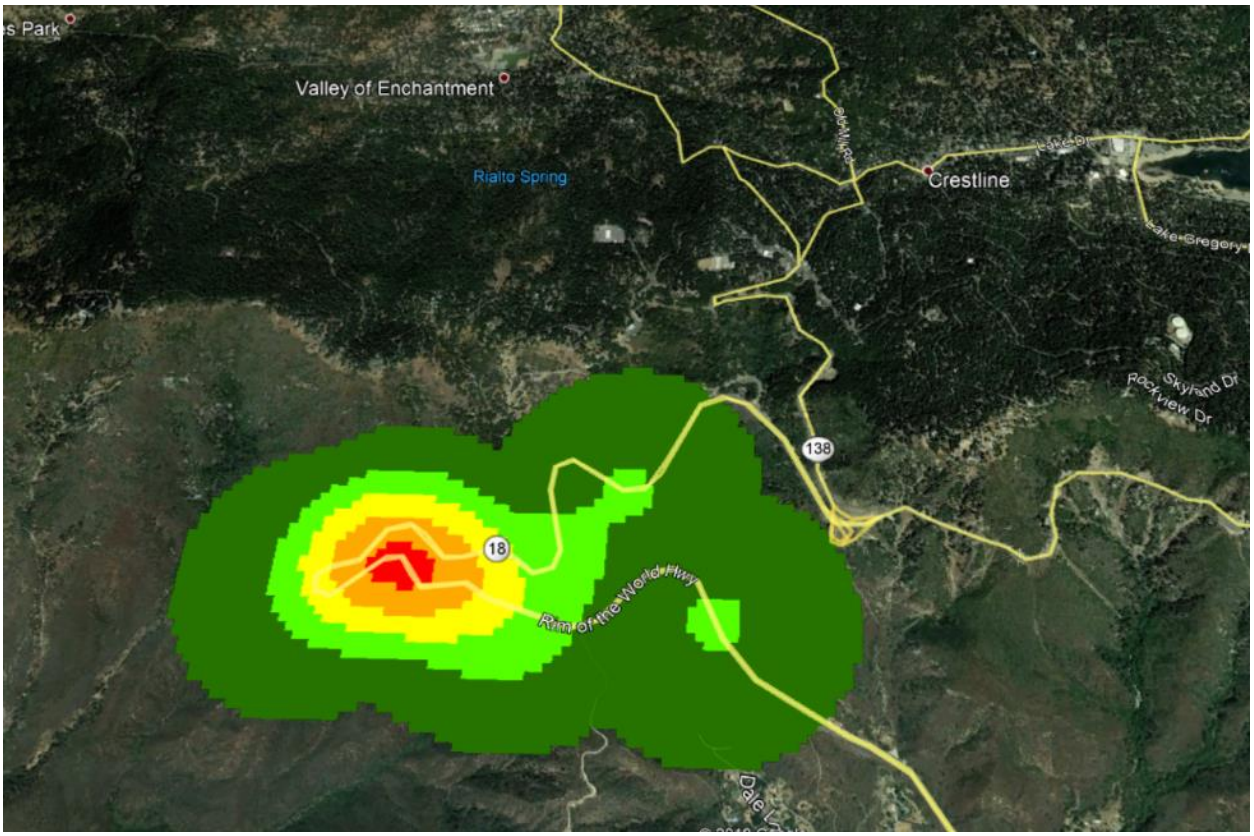
Valley of Enchantment
Rialto Spring
Crestline
Lake Dr
Lake Gregory
Skyland Dr
Rockview Dr
138
18
Rim of the World Hwy


**8b**

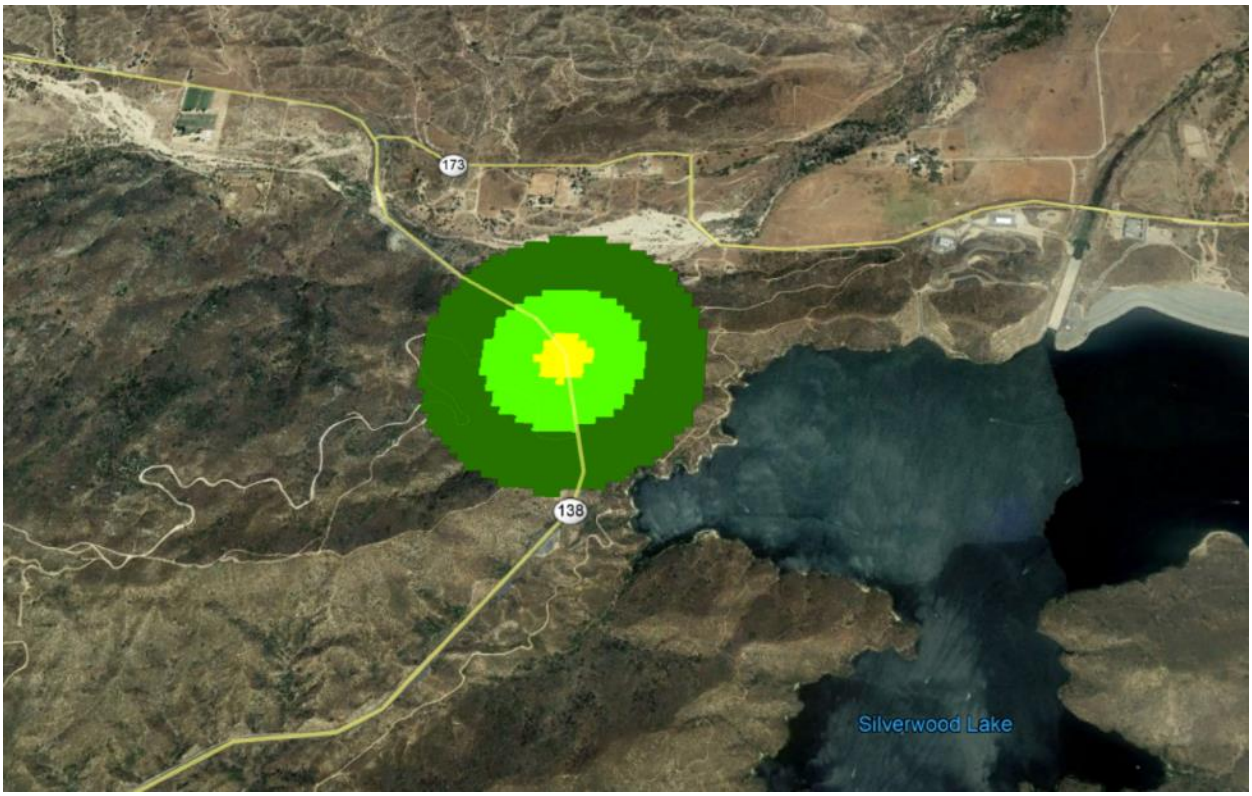


**8c**

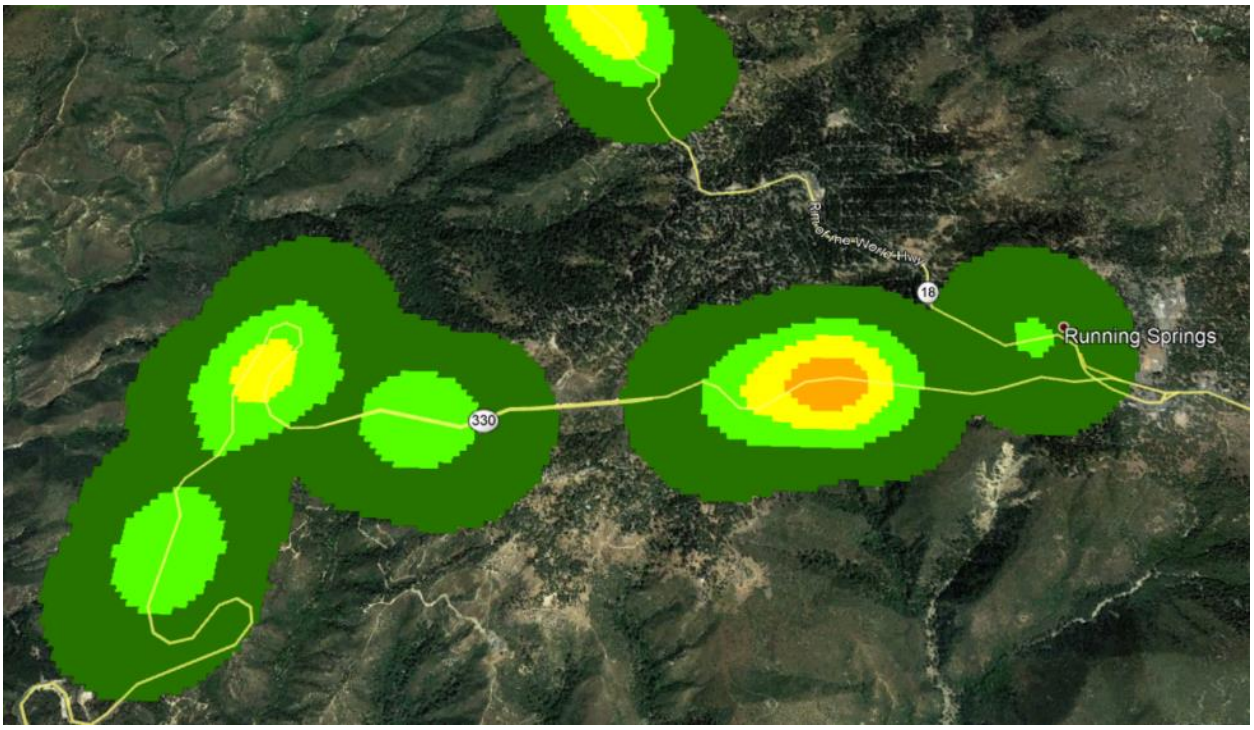


**8d**

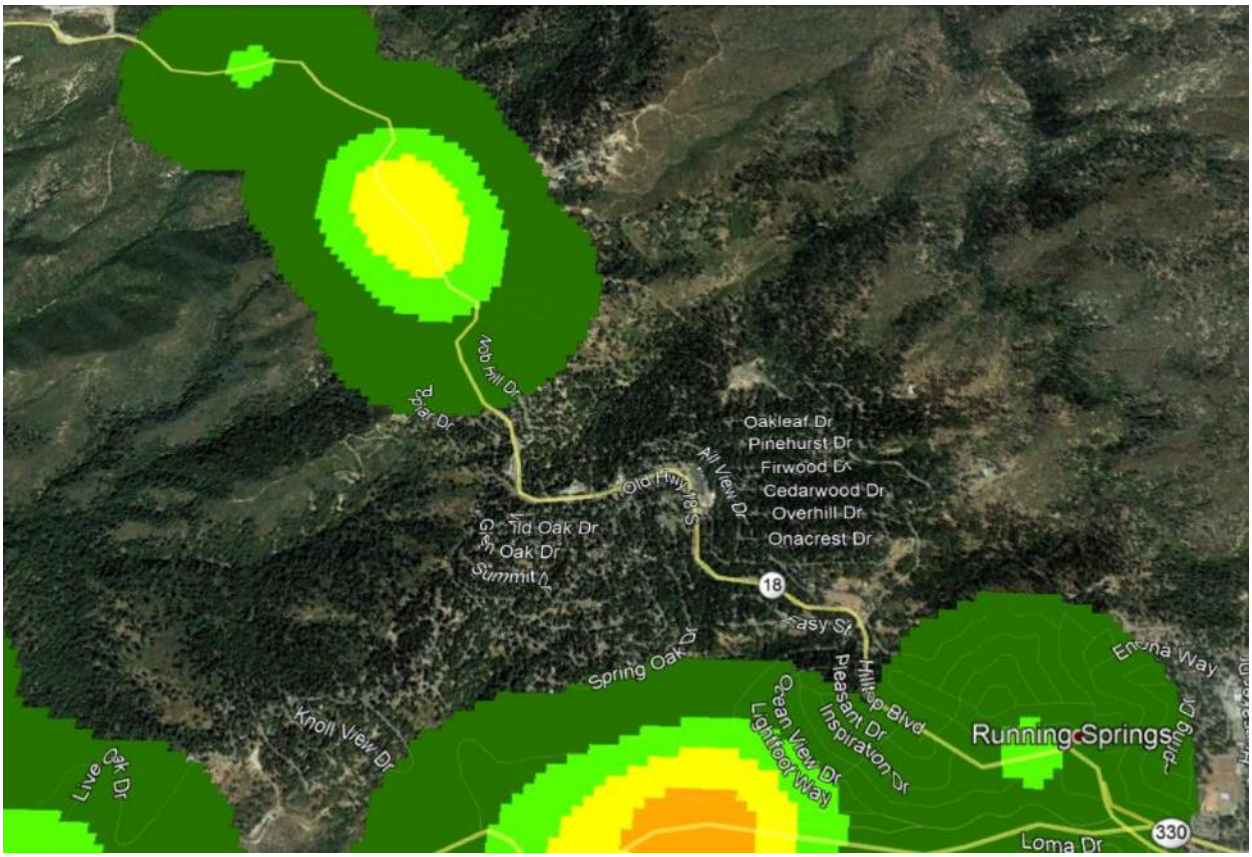
Oakleaf Dr
Pinehurst Dr
Firwood Dr
Cedarwood Dr
Overhill Dr
Onacrest Dr
All View Dr
Old Hwy 18 S
18
Spring Oak Dr
Pleasant Dr
Inspiration Dr
Ocean View Dr
Lightfoot Way
Knoll View Dr
Live Oak Dr
Hilltop Blvd
Running Springs
Loma Dr
330


**8e**

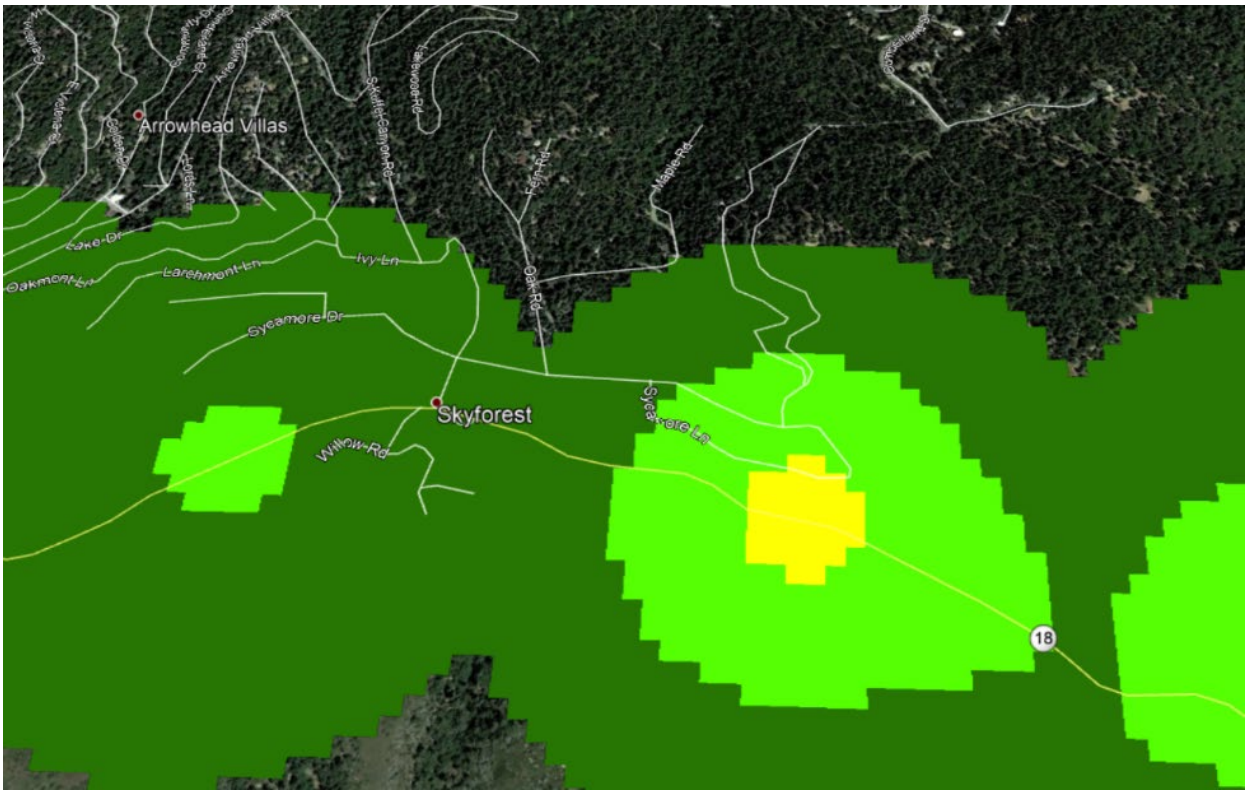
Arrowhead Villas
Oak Rd
Maple Rd
Ivy Ln
Larchmont Ln
Sycamore Dr
Skyforest
Willow Rd
Sycamore Ln
18

**8f**

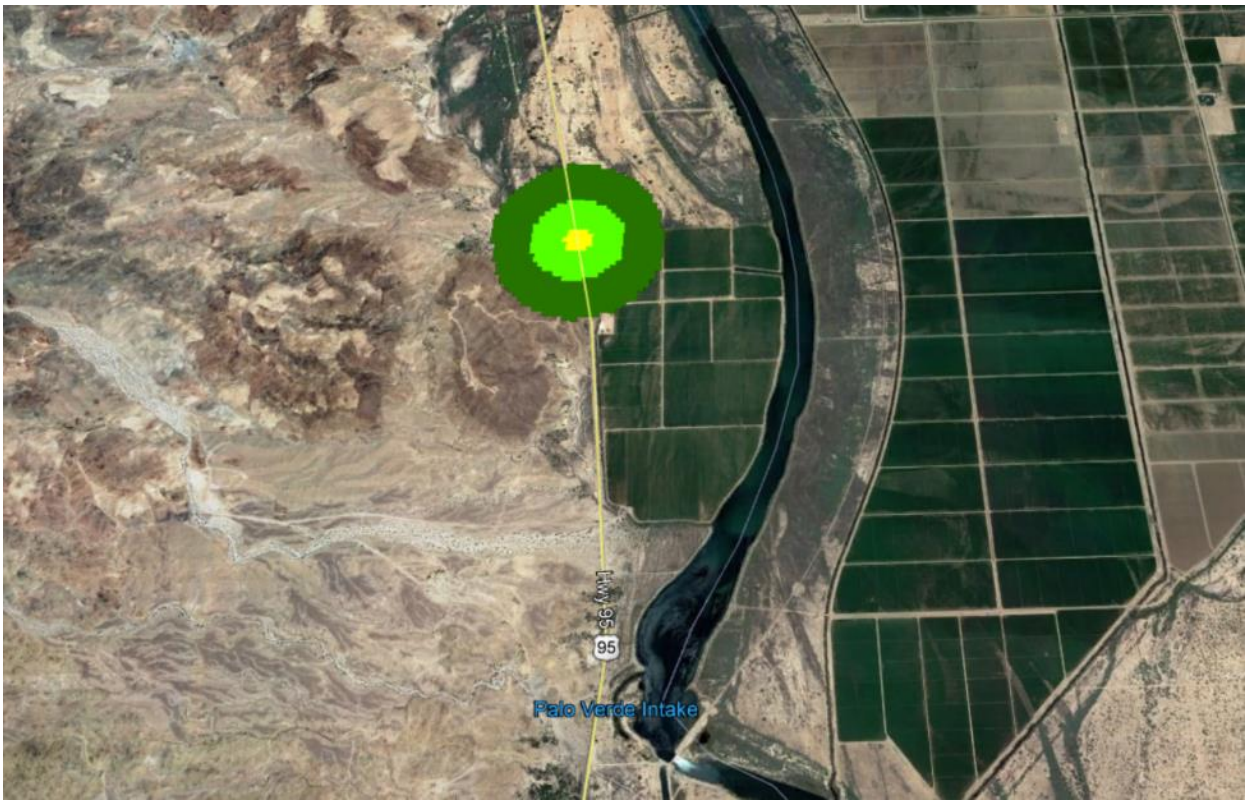


**CRASH DATA DISTRICT 9**

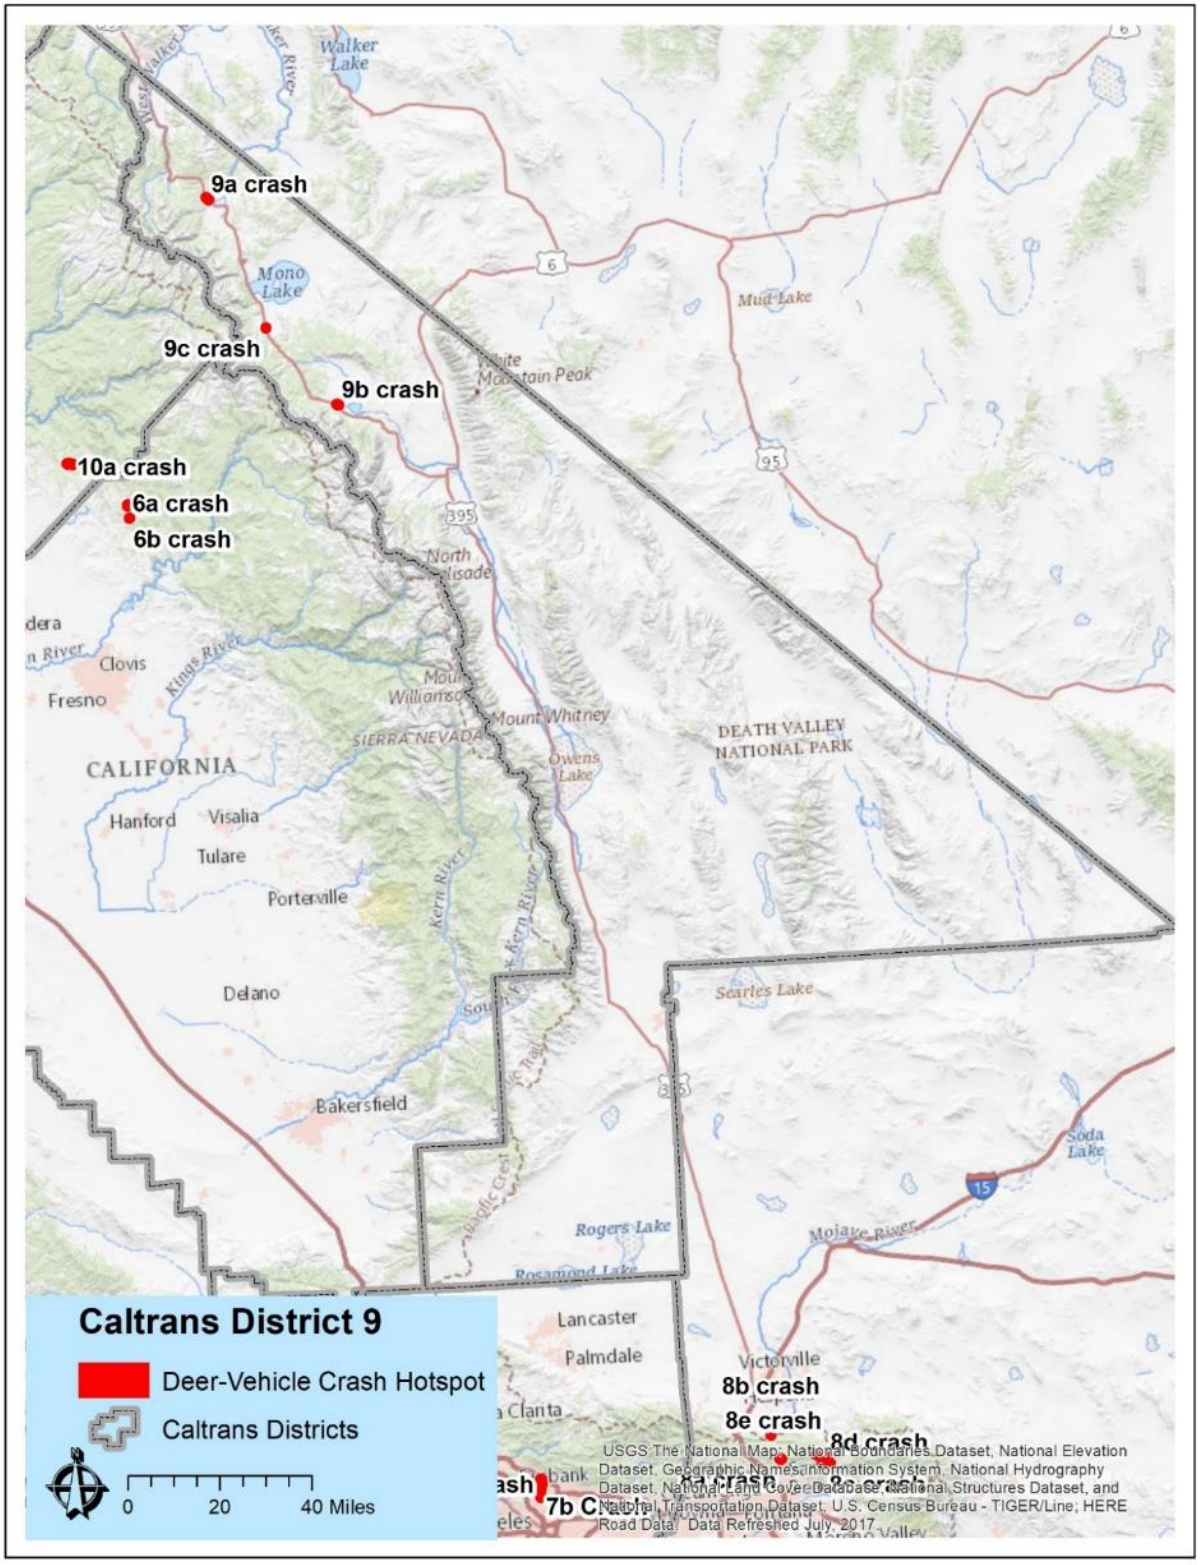



Hot spots in District 9 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**9a**

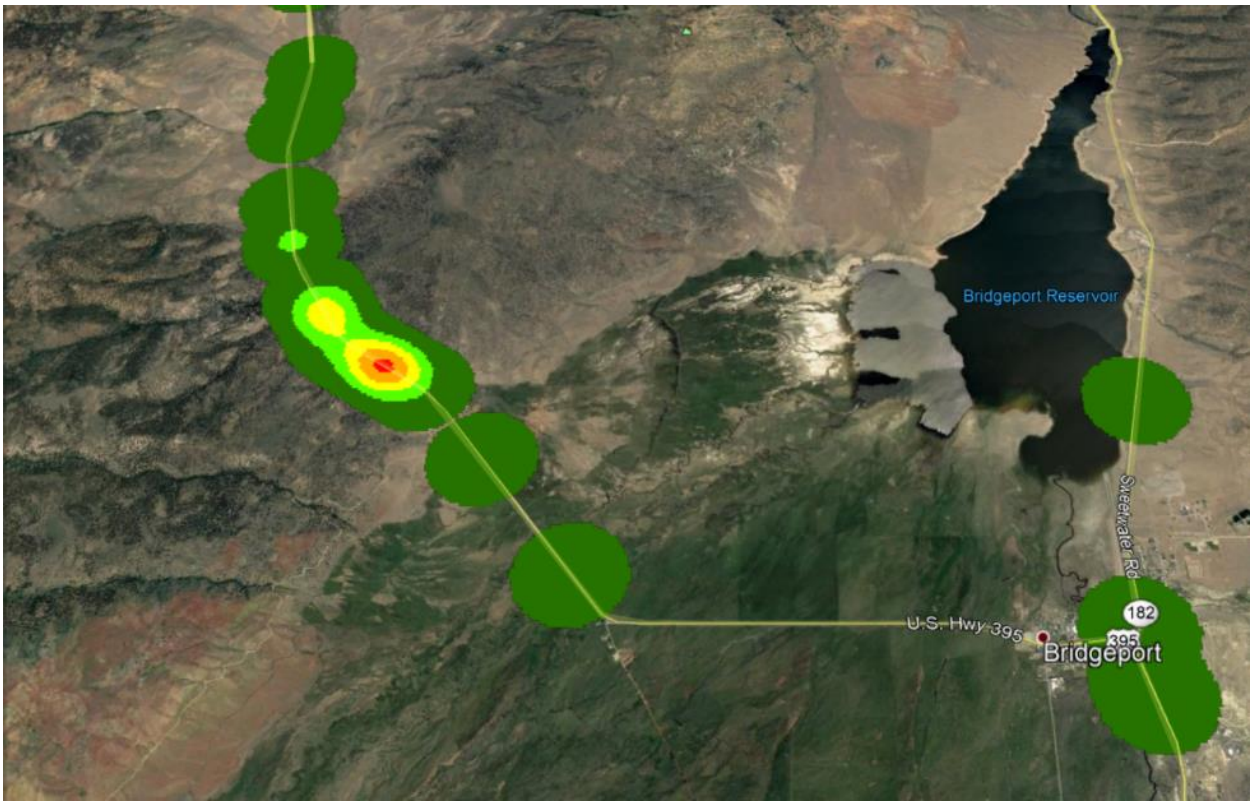
Bridgeport Reservoir
Sweetwater Rd
U.S. Hwy 395
182
395
Bridgeport


**9b**

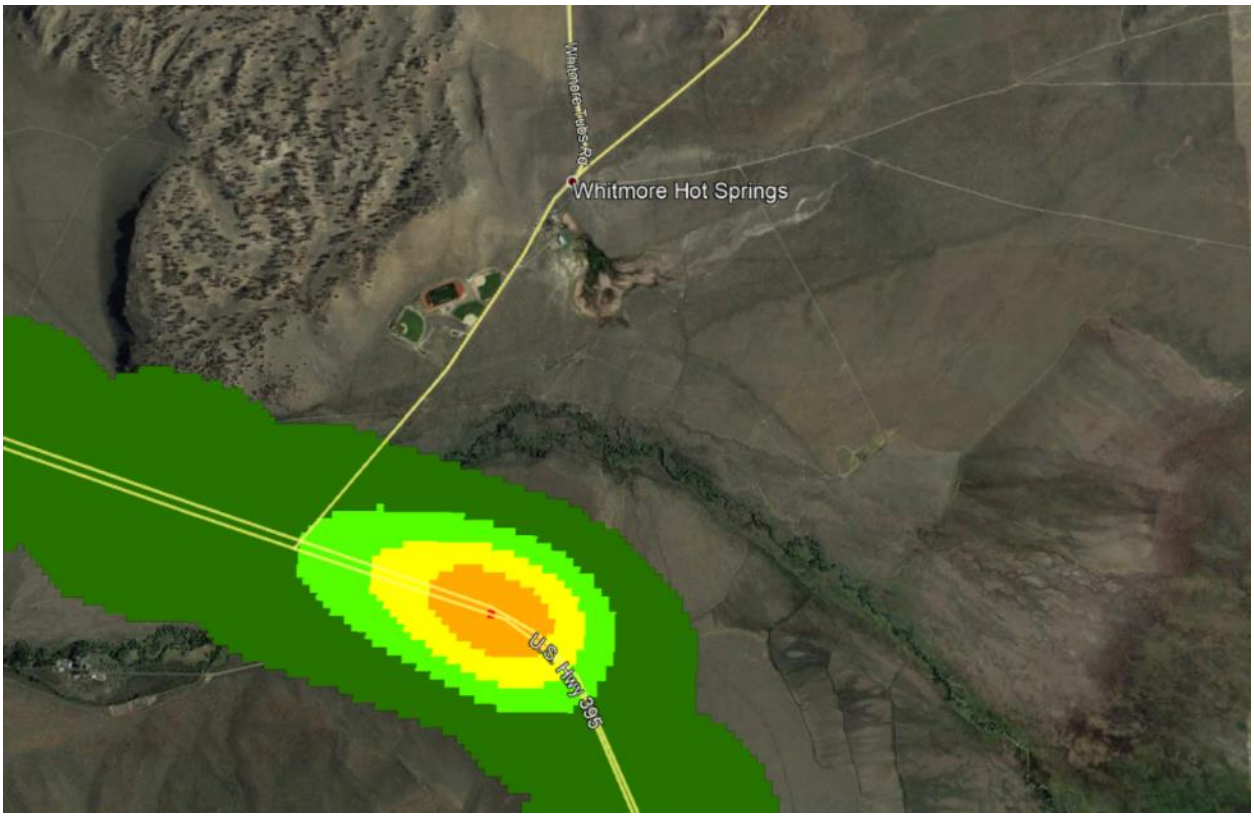

**9c**




**CRASH DATA DISTRICT 10**

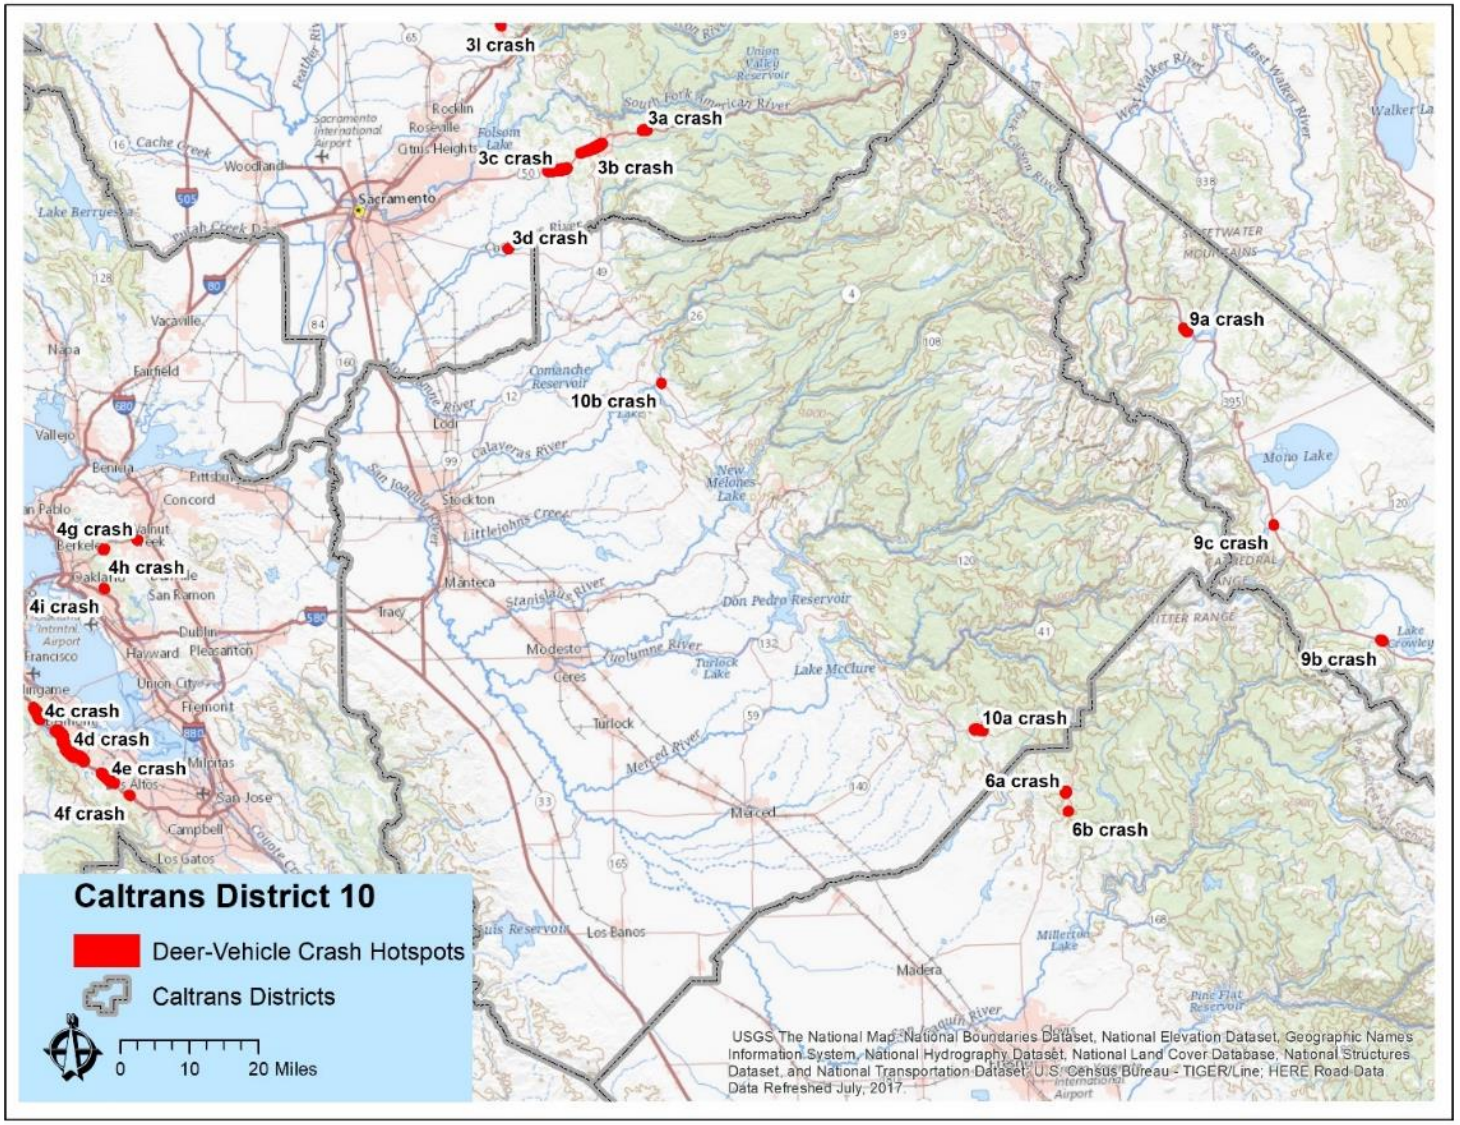



Hot spots in District 10 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**10a**

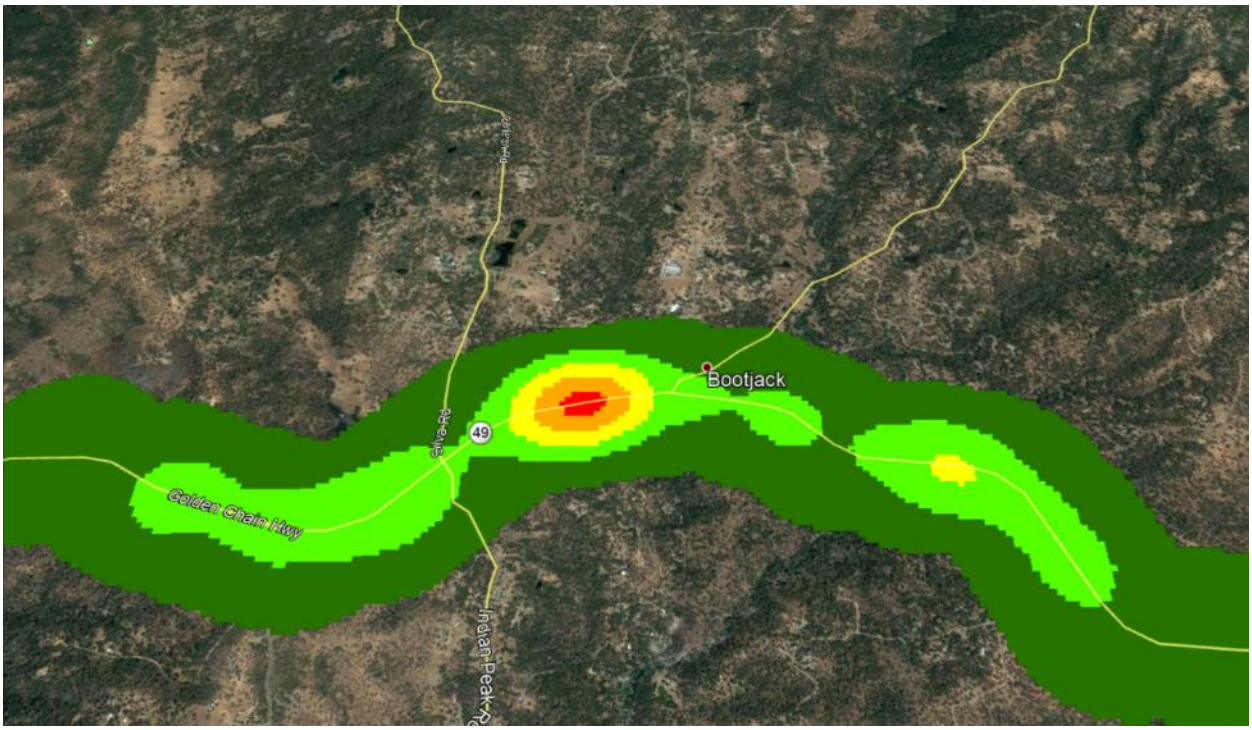

**10b**

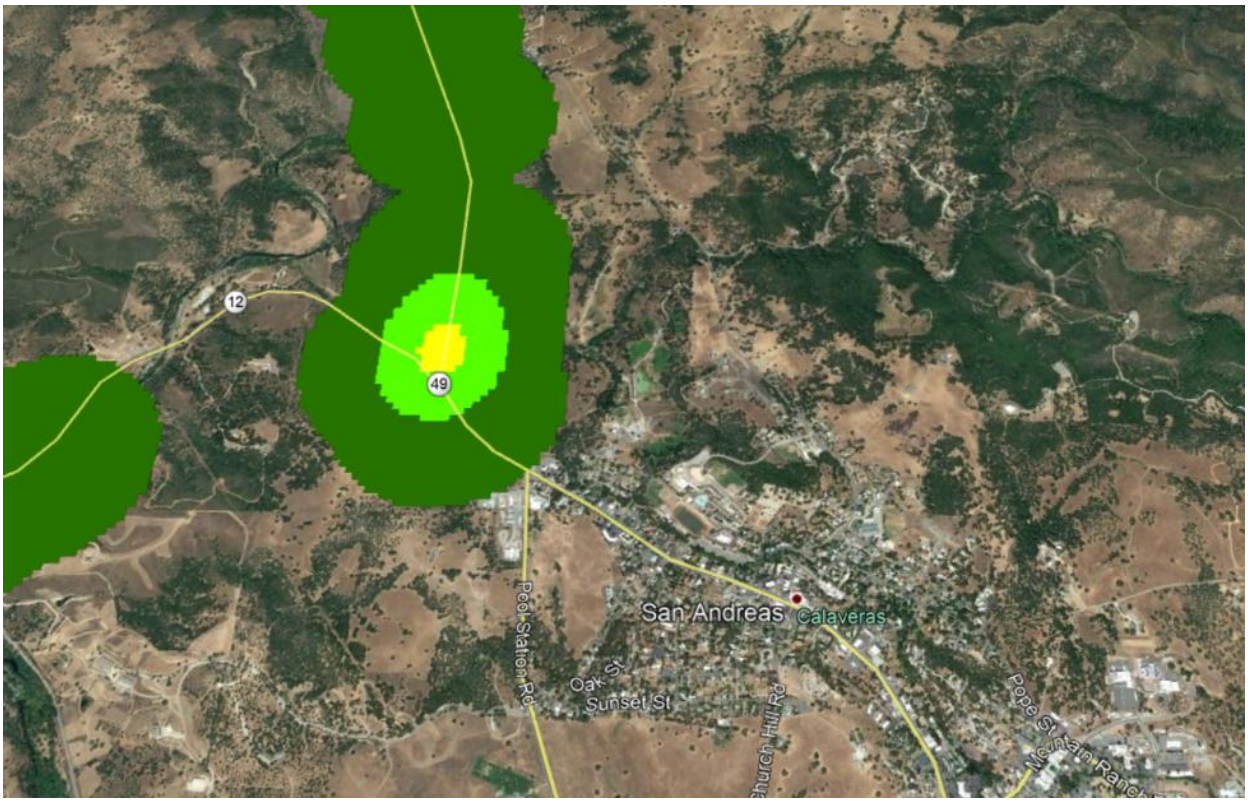

12
49
San Andreas
Calaveras
Oak St
Sunset St
Pool Station Rd
Church Hill Rd
Pope St
Mountain Ranch

## CRASH DATA DISTRICT 11

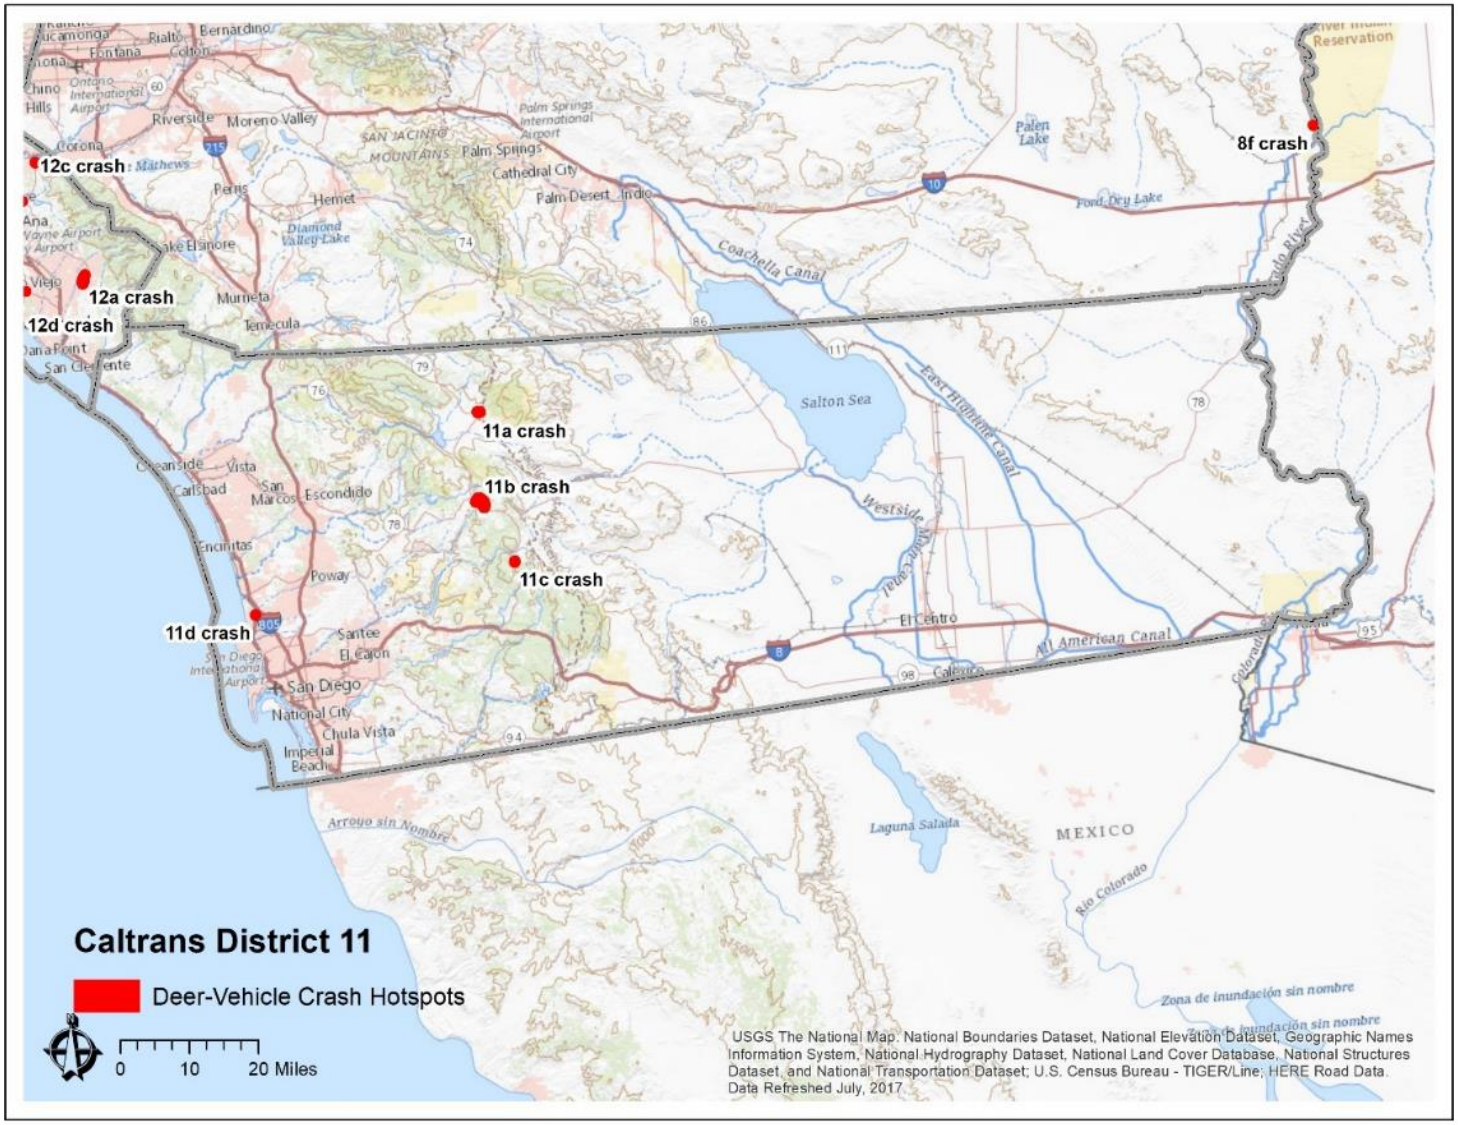



Hot spots in District 11 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.


**11a**

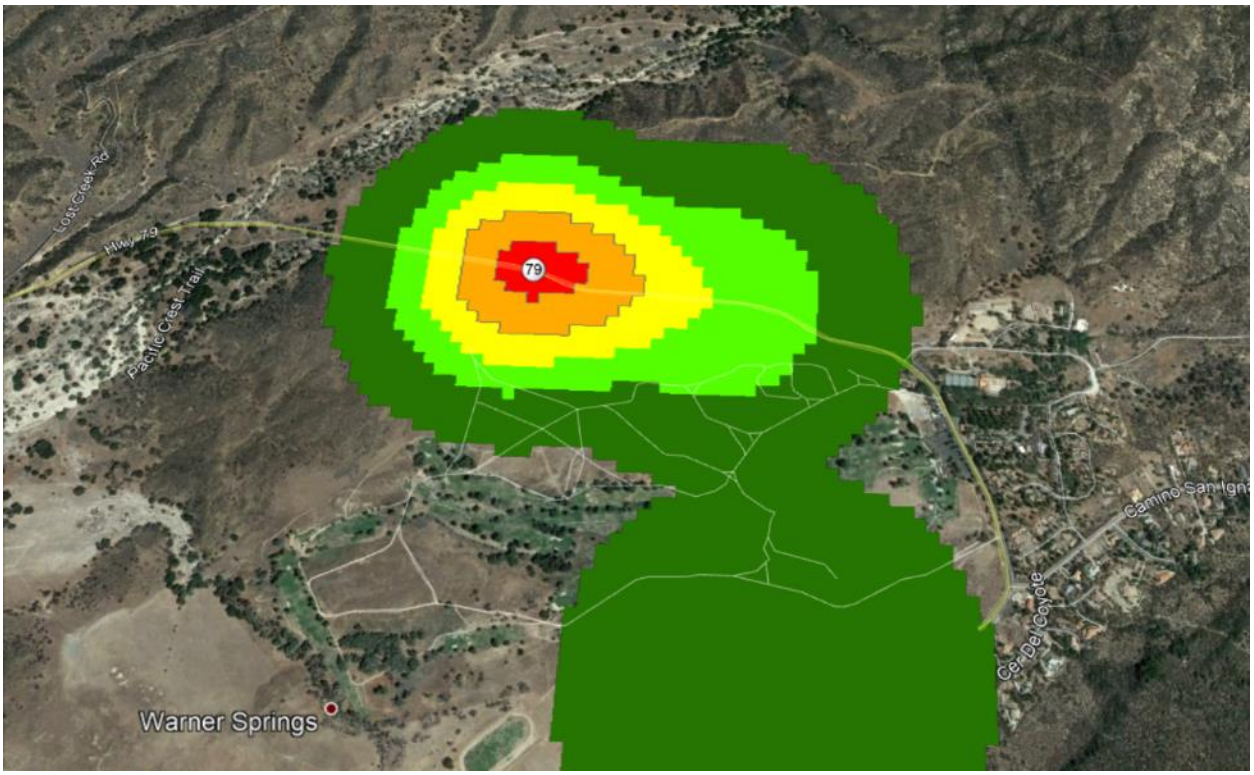
Lost Creek Rd
Hwy 79
Pacific Crest Trail
79
Warner Springs
Ce De Coyote
Camino San Ign


**11b**

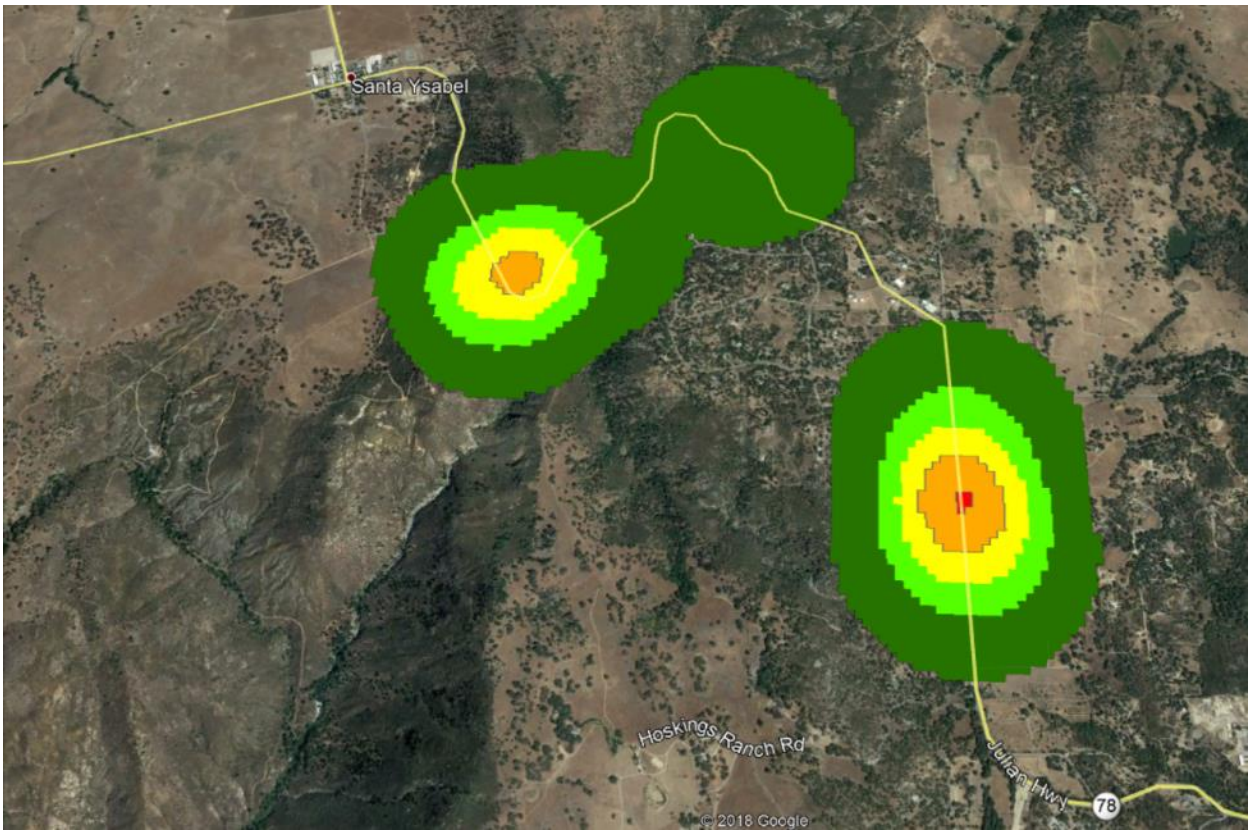


**11c**

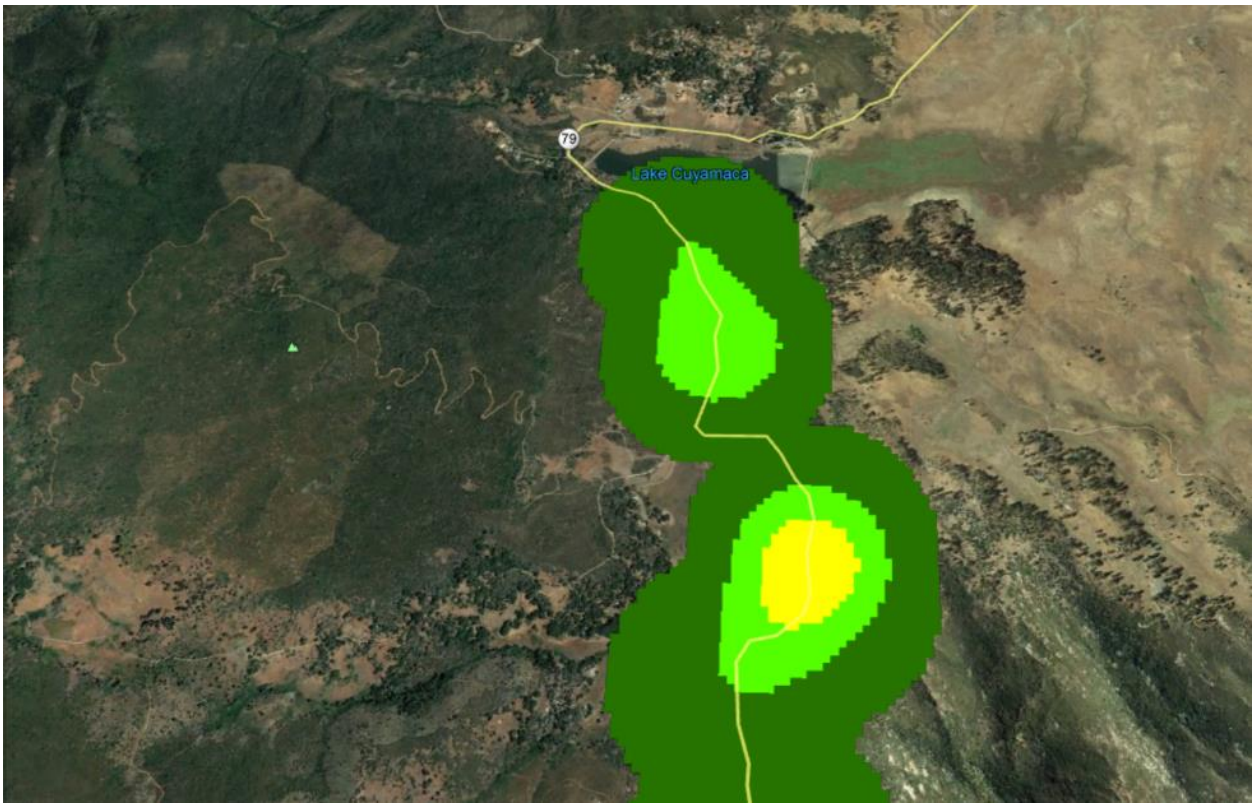

**11d**

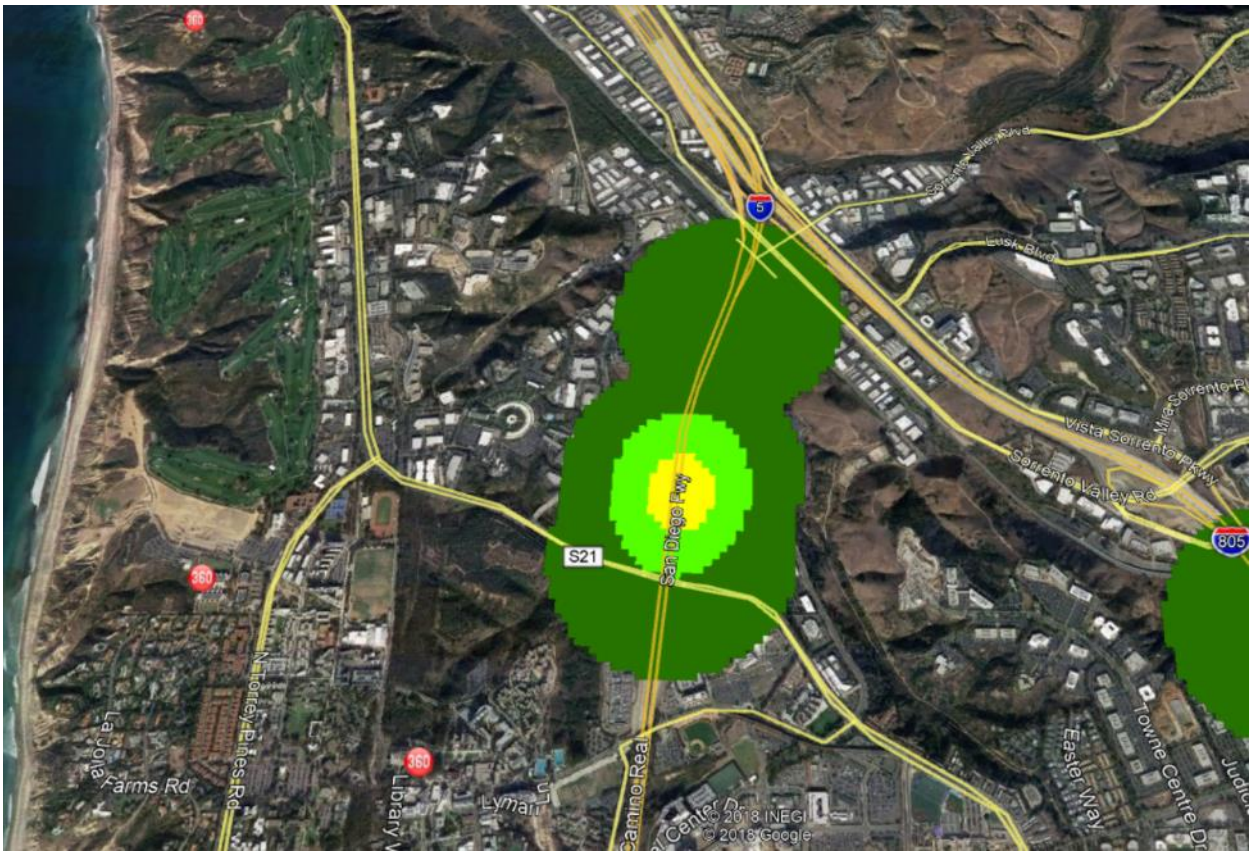

S21
San Diego Fwy
Vista Sorrento Pkwy
Sorrento Valley Rd
Lusk Blvd
Mira Sorrento Pl
Towne Centre Dr
Eastgate Mall
Nobel Dr
Lyman
La Jolla Farms Rd
Torrey Pines Rd
Library
Camino Real
© 2018 INEGI
© 2018 Google

## CRASH DATA DISTRICT 12

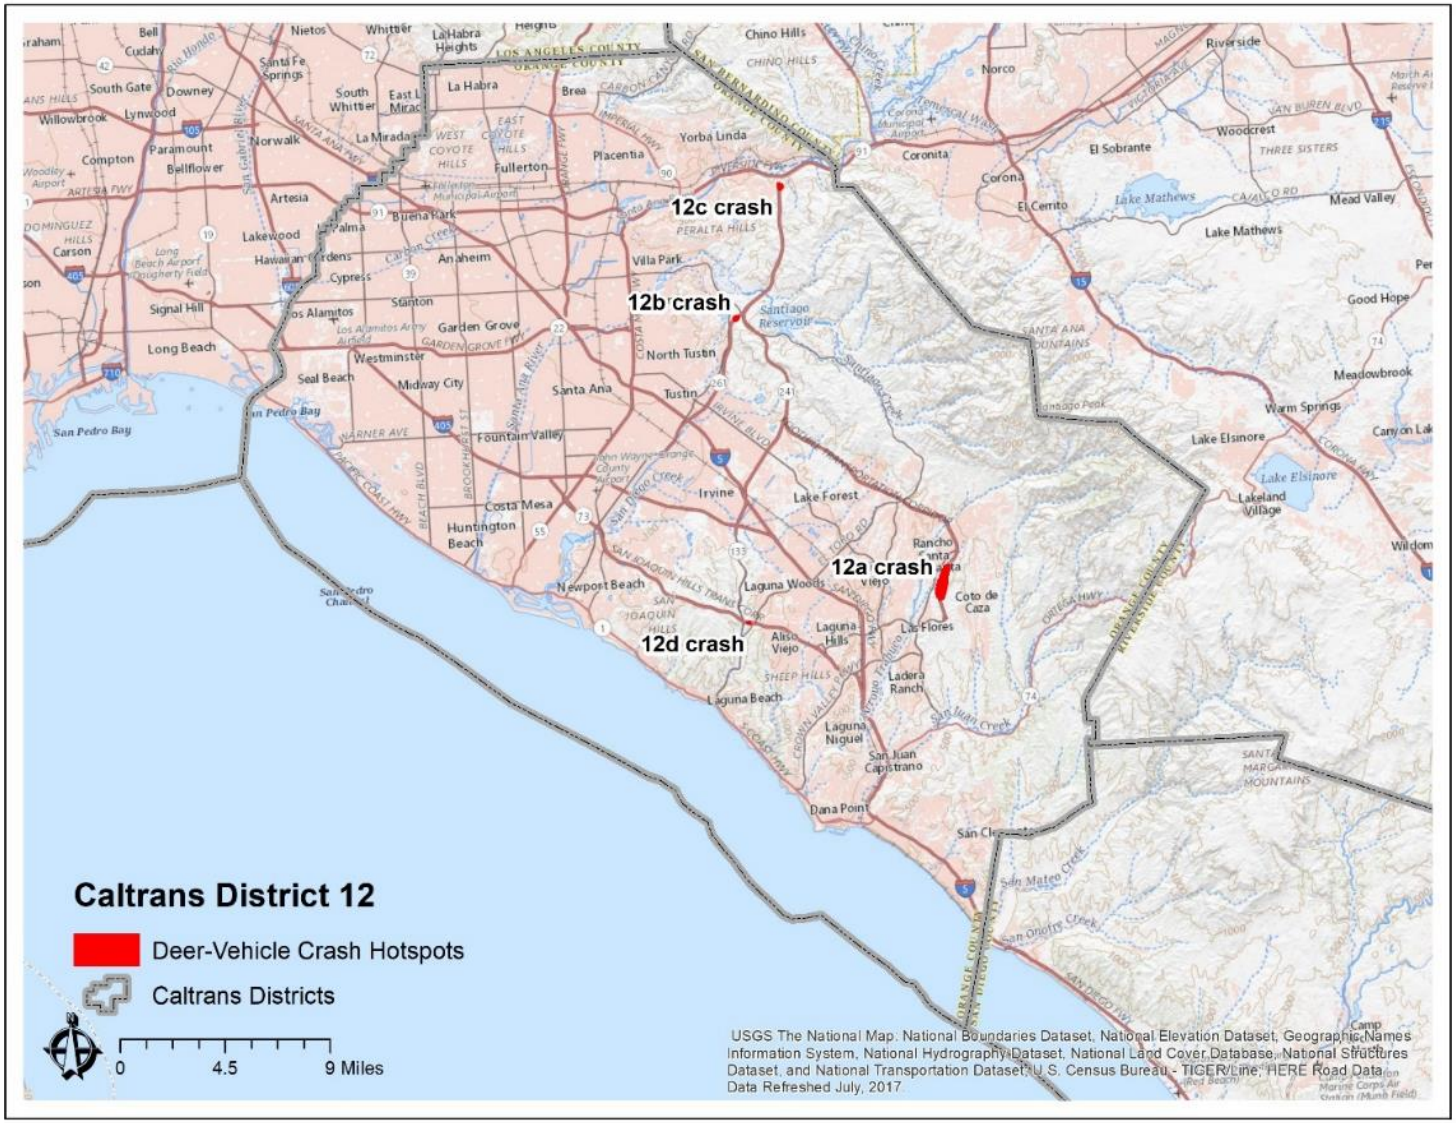


Hot spots in District 12 based on per district deer-vehicle crash data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix B) and the detailed maps on the following pages.

**12a**

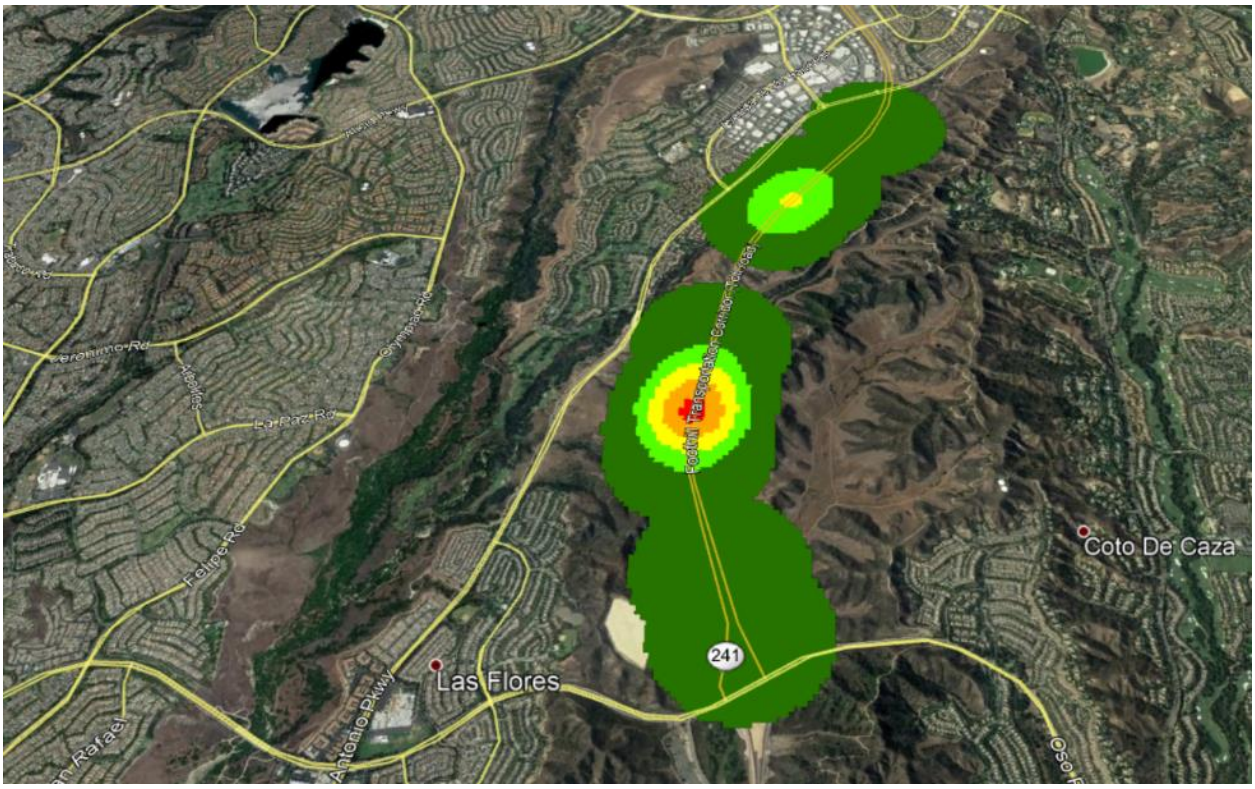


**12b**


William Harding Nature Area
Peters Canyon Rd
Eastern Transportation Corridor (Toll Road)
261
Peters Canyon Reservoir
Brentwood Dr
Highcliff Dr
Lake View Trl
Rangeview Dr
Deerhaven Dr
S18
241

**12c**


Yorba Linda
90
91
55
71
Villa Park
Villa Park Rd
E Santiago Canyon Rd
Eastern Transportation Corridor

**12d**

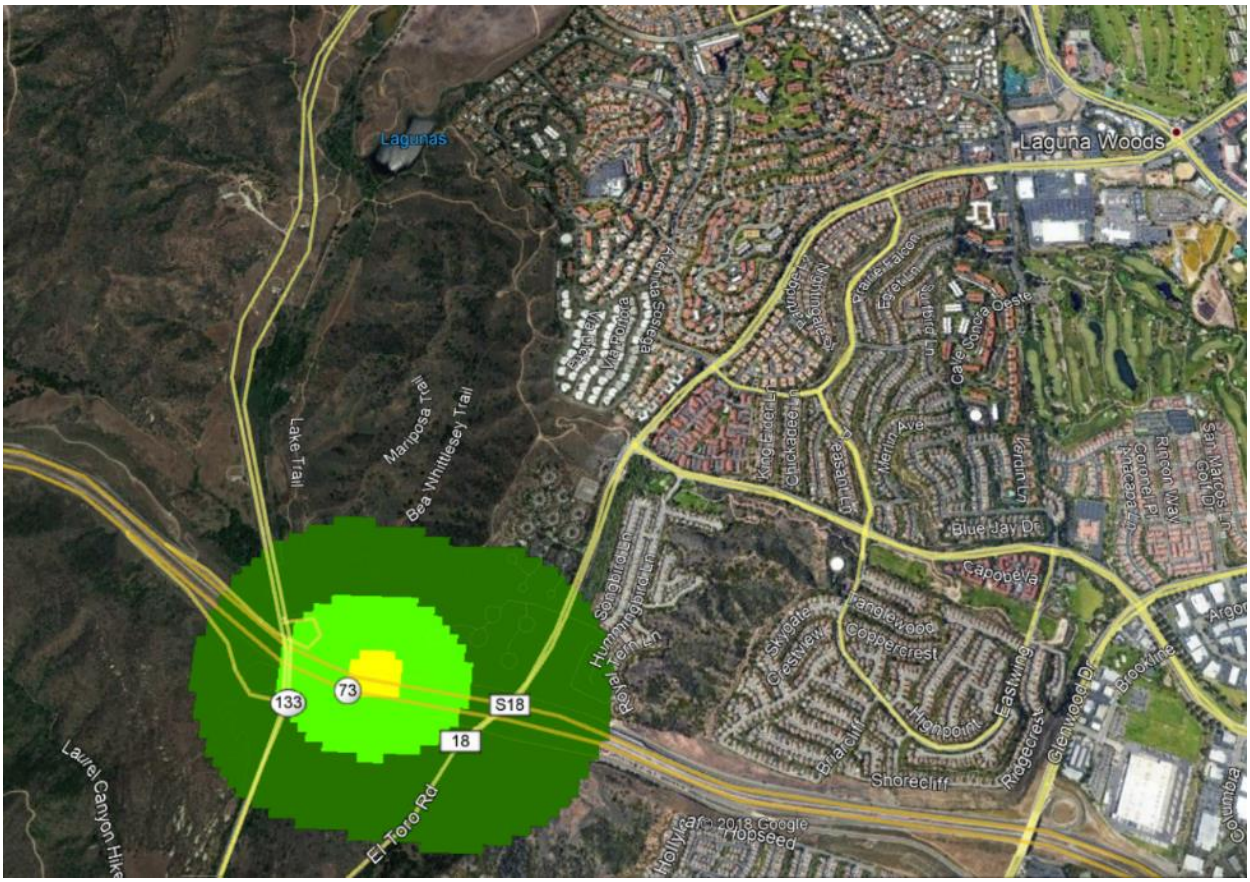
Lagunas
Laguna Woods
Lake Trail
Mariposa Trail
Bea Whittlesey Trail
Merlin Ave
Blue Jay Dr
Capoeva
Coppercrest
Highpoint
Eastwind
Shorecliff
Glenwood Dr
Brookline
Skyline Dr
Ridgecrest
133
73
S18
18
El Toro Rd
Laurel Canyon Hike
© 2018 Google
Tropseed

# 10.APPENDIX C: ANALYSES PER DISTRICT MULE DEER CARCASSES

CARCASS DATA PER DISTRICT

The numbers in the table on the following page correspond with the detailed maps per district and maps of the individual hot spots within a district on the following pages.


The "worst" hot spots based on analyses for mule deer carcasses per Caltrans district. Note: AADT = Annual Average Daily Traffic.

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1A | 1 | Humboldt | Eureka | US Hwy 101 | 1_HUM_101_704 | 1_HUM_101_681 | red | 2.3 | 0.9 | 0.7 | 0.1 | 4 | yes | 24150 |
| 1B | 1 | Humboldt | Fortuna | US Hwy 101 | 1_HUM_101_641 | 1_HUM_101_601 | yellow | 4.0 | 1.5 | 0.0 | 0.0 | 4 | yes | 24000 |
| 1C | 1 | Mendocino | Inglenook | Hwy 1 | 1_MEN_1_685 | 1_MEN_1_681 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 4925 |
| 1D | 1 | Mendocino | Fort Bragg | Hwy 1 | 1_MEN_1_640 | 1_MEN_1_636 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 4925 |
| 1E | 1 | Mendocino | Caspar | Hwy 1 | 1_MEN_1_554 | 1_MEN_1_534 | yellow | 2.0 | 0.5 | 0.0 | 0.0 | 2 | Yes | 10200 |
| 1F | 1 | Mendocino | Little River | Hwy 1 | 1_MEN_1_483 | 1_MEN_1_479 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | Yes | 3750 |
| 1G | 1 | Mendocino | Elk | Hwy 1 | 1_MEN_1_275 | 1_MEN_1_272 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 1300 |
| 1H | 1 | Mendocino | Anchor Bay | Hwy 1 | 1_MEN_1_30 | 1_MEN_1_28 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 3500 |
| 1I | 1 | Lake | Blue Lakes | Hwy 20 | 1_LAK_20_10 | 1_LAK_20_12 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 9650 |
| 1J | 1 | Lake | Pepperwood Grove | Hwy 20 | 1_LAK_20_180 | 1_LAK_20_192 | yellow | 1.2 | 0.6 | 0.0 | 0.0 | 2 | No | 8100 |
| 1K | 1 | Lake | Clearlake Oaks | Hwy 20 | 1_LAK_20_289 | 1_LAK_20_297 | yellow | 0.8 | 0.6 | 0.0 | 0.0 | 2 | No | 8150 |
| 1L | 1 | Lake | Riviera Estates | Hwy 281 | 1_LAK_281_167 | 1_LAK_281_169 | yellow | 0.1 | 0.1 | 0.0 | 0.0 | 2 | No | 6400 |
| 1M | 1 | Lake | Jct Hwy 281 | Hwy 29 | 1_LAK_29_262 | 1_LAK_29_259 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 9350 |
| 1N | 1 | Lake | Lower lake | Hwy 29 | 1_LAK_29_207 | 1_LAK_29_198 | yellow | 0.9 | 0.6 | 0.0 | 0.0 | 2 | No | 10900 |
| 1O | 1 | Lake | Hidden Valley L. | Hwy 29 | 1_LAK_29_112 | 1_LAK_29_110 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 9900 |
| | | | | | | | | | | | | | | |
| 2A | 2 | Siskiyou | Yreka | I-5 | 2_SIS_5_471 | 2_SIS_5_418 | red | 6.3 | 1.3 | 0.3 | 0.2 | 4 | Yes | 19000 |
| 2B | 2 | Siskiyou | Weed | I-5 | 2_SIS_5_202 | 2_SIS_5_199 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 4 | No | 17050 |
| 2C | 2 | Siskiyou | Mt. Shasta | I-5 | 2_SIS_5_126 | 2_SIS_5_122 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 4 | No | 23900 |
| 2D | 2 | Siskiyou | Dunsmuir | I-5 | 2_SIS_5_15 | 2_SIS_5_4 | yellow | 1.1 | 0.5 | 0.0 | 0.0 | 4 | No | 20350 |
| 2E | 2 | Siskiyou | Ft. Jones | Hwy 3 | 2_SIS_3_332 | 2_SIS_3_329 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 3625 |
| 2F | 2 | Siskiyou | Indian Tom Lake | US Hwy 97 | 2_SIS_97_540 | 2_SIS_97_524 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | | 665 |
| 2G | 2 | Siskiyou | Macdoel | US Hwy 97 | 2_SIS_97_405 | 2_SIS_97_403 | yellow | 0.2 | 0.2 | 0.0 | 0.0 | 2 | No | 1190 |
| 2H | 2 | Modoc | Hannchen | Hwy 139 | 2_MOD_139_391 | 2_MOD_139_385 | yellow | 0.6 | 0.6 | 0.0 | 0.0 | 2 | No | 1625 |
| 2I | 2 | Modoc | Hannchen | Hwy 139 | 2_MOD_139_356 | 2_MOD_139_353 | yellow | 0.3 | 0.3 | 0.0 | 0.0 | 2 | No | 1625 |
| | | | | | | | | | | | | | | |
| | 3 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 4A | 4 | San Mateo | Highlands-Baywood P. | Hwy 92 | 4_SM_92_96 | 4_SM_92_79 | orange | 1.7 | 0.9 | 0.1 | 0.0 | 4 | No | 77200 |
| 4B | 4 | Santa Clara | Los Altos Hills | I-280 | 4_SCL_280_165 | 4_SCL_280_144 | orange | 2.1 | 0.6 | 0.2 | 0.0 | 8 | No | 131500 |
| 4C | 4 | Alameda | Mission San Jose | I-680 | 4_ALA_680_67 | 4_ALA_680_64 | red | 0.5 | 0.2 | 0.2 | 0.1 | 6 | No | 155400 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 4D | 4 | Contra Costa | Orinda | Hwy 24 | 4_CC_24_27 | 4_CC_24_19 | orange | 0.8 | 0.2 | 0.6 | 0.0 | 8 | No | 188000 |
| 4E | 4 | Contra Costa | Alamo | I-680 | 4_CC_680_116 | 4_CC_680_110 | orange | 0.6 | 0.3 | 0.3 | 0.0 | 6 | No | 153850 |
| | | | | | | | | | | | | | | |
| | 5 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 6A | 6 | Madera | Oakhurst | Hwy 41 | 6_MAD_41_393 | 6_MAD_41_196 | red | 19.7 | 2.6 | 0.6 | 0.3 | 2 | No | 19000 |
| 6B | 6 | Tuolumne | Three Rivers | Hwy 198 | 6_TUL_198_374 | 6_TUL_198_369 | red | 0.5 | 0.2 | 0.2 | 0.1 | 2 | Yes | 4525 |
| 6C | 6 | Tuolumne | Three Rivers | Hwy 198 | 6_TUL_198_440 | 6_TUL_198_400 | yellow | 4.4 | 0.6 | 0.0 | 0.0 | 2 | Yes | 3175 |
| 6D | 6 | Kern | Alta Sierra | Hwy 155 | 6_KER_155_491 | 6_KER_155_469 | yellow | 2.2 | 0.2 | 0.0 | 0.0 | 2 | No | 355 |
| | | | | | | | | | | | | | | |
| | 7 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | 8 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 9A | 9 | Mono | Topaz Lake | US Hwy 395 | 9_MNO_395_1201 | 9_MNO_395_1178 | orange | 2.3 | 0.6 | 0.3 | 0.0 | 2 | No | 3900 |
| 9B | 9 | Mono | Walker | US Hwy 395 | 9_MNO_395_1143 | 9_MNO_395_1058 | red | 8.5 | 1.7 | 1.2 | 0.8 | 2 | Yes | 3550 |
| 9C | 9 | Mono | Walker | US Hwy 395 | 9_MNO_395_1032 | 9_MNO_395_1008 | orange | 2.4 | 0.5 | 0.1 | 0.0 | 2 | No | 3425 |
| 9D | 9 | Mono | Sonora Junction | US Hwy 395 | 9_MNO_395_989 | 9_MNO_395_878 | orange | 11.1 | 3.6 | 0.7 | 0.0 | 2 | Yes | 3425 |
| 9E | 9 | Mono | Mono City | US Hwy 395 | 9_MNO_395_641 | 9_MNO_395_579 | orange | 6.2 | 0.8 | 0.1 | 0.0 | 4 | Yes | 3350 |
| 9F | 9 | Mono | Whitmore Hot Sprs. | US Hwy 395 | 9_MNO_395_282 | 9_MNO_395_134 | red | 15.6 | 2.4 | 0.6 | 0.1 | 4 | Yes | 7200 |
| | | | | | | | | | | | | | | |
| 10A | 10 | Amador | Pine Grove | Hwy 88 | 10_AMA_88_377 | 10_AMA_88_149 | red | 22.6 | 10.8 | 10.2 | 0.5 | 2 | No | 8250 |
| 10B | 10 | Amador | Jackson | Hwy 49 | 10_AMA_49_58 | 10_AMA_49_0 | orange | 5.8 | 0.2 | 1.6 | 0.0 | 2 | No | 8100 |
| 10C | 10 | Tuolumne | Mono Vista | Hwy 108 | 10_TUO_108_154 | 10_TUO_108_0 | orange | 15.4 | 5.3 | 0.2 | 0.0 | 2 | Yes | 3975 |
| 10D | 10 | Tuolumne | Moccasin | Hwy 120 | 10_TUO_120_244 | 10_TUO_120_219 | orange | 3.0 | 2.0 | 0.2 | 0.0 | 2 | Yes | 4425 |
| 10E | 10 | Tuolumne | Groveland | Hwy 120 | 10_TUO_120_410 | 10_TUO_120_303 | orange | 10.7 | 2.1 | 0.1 | 0.0 | 2 | No | 6225 |
| 10F | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_196 | 10_MPA_49_78 | orange | 11.8 | 3.0 | 0.3 | 0.0 | 2 | Yes | 5200 |
| 10G | 10 | Mariposa | Bootjack | Hwy 49 | 10_MPA_49_38 | 10_MPA_49_9 | orange | 2.9 | 1.1 | 0.1 | 0.0 | 2 | No | 3500 |
| | | | | | | | | | | | | | | |
| | 11 | Insufficient data | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| 12A | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 12_ORA_241_339 | 12_ORA_241_321 | red | 1.8 | 0.8 | 0.2 | 0.1 | 6 | Yes | 40150 |
| 12B | 12 | Orange | Las Flores | Hwy 241 | 12_ORA_241_170 | 12_ORA_241_150 | orange | 2.0 | 0.5 | 0.1 | 0.0 | 4 | Yes | 6900 |
| 12C | 12 | Orange | San Joaquin Hills | Hwy 73 | 12_ORA_73_198 | 12_ORA_73_173 | orange | 2.5 | 1.0 | 0.2 | 0.0 | 8 | Yes | 67650 |
| 12D | 12 | Orange | Peters Canyon Reservoir | Hwy 241 | 12_ORA_241_373 | 12_ORA_241_369 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 7 | Yes | 47800 |

| Hot spot ID# | Dis-trict | County | Nearby town | Highway | Start hot spot | End hot spot | Most severe category | Total length (mi) | Length yellow (mi) | Length orange (mi) | Length red (mi) | Lanes (n) | Existing structure | AADT |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 12E | 12 | Orange | Rancho Mission Viejo | Hwy 74 | 12 ORA 74 97 | 12 ORA 74 93 | yellow | 0.4 | 0.4 | 0.0 | 0.0 | 2 | No | 11100 |

**CARCASS DATA DISTRICT 1**

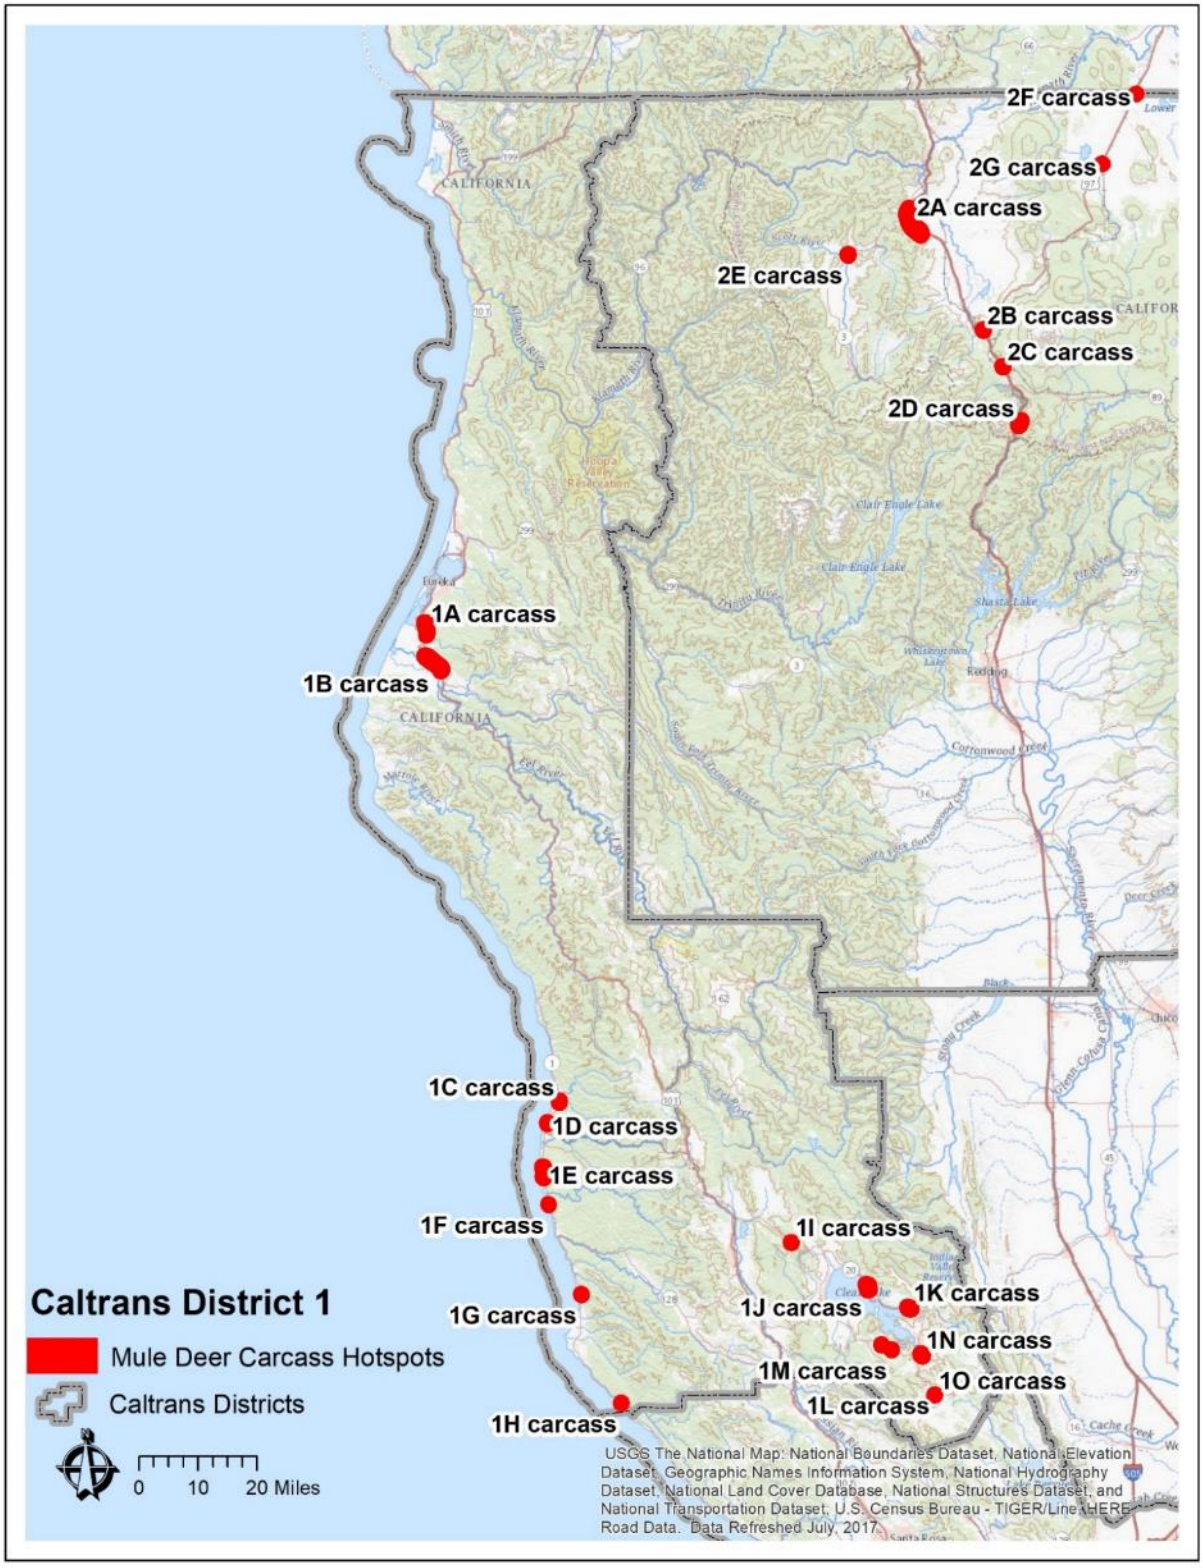


Hot spots in District 1 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**1A**


Indian Island
Daby Island
Woodley Island
255
Eureka
101
Bayview
Cutten
Redwood Hwy
Ridgewood
Fields Landing
Humboldt Hill
Southport Landing
Teal Island
Beatrice

**1B**


Loleta
345
Singley Rd
211
BUS
101
Fortuna
Newburg
12th St
S Fortuna Blvd
Kenmar Rd
Redwood


**1C**

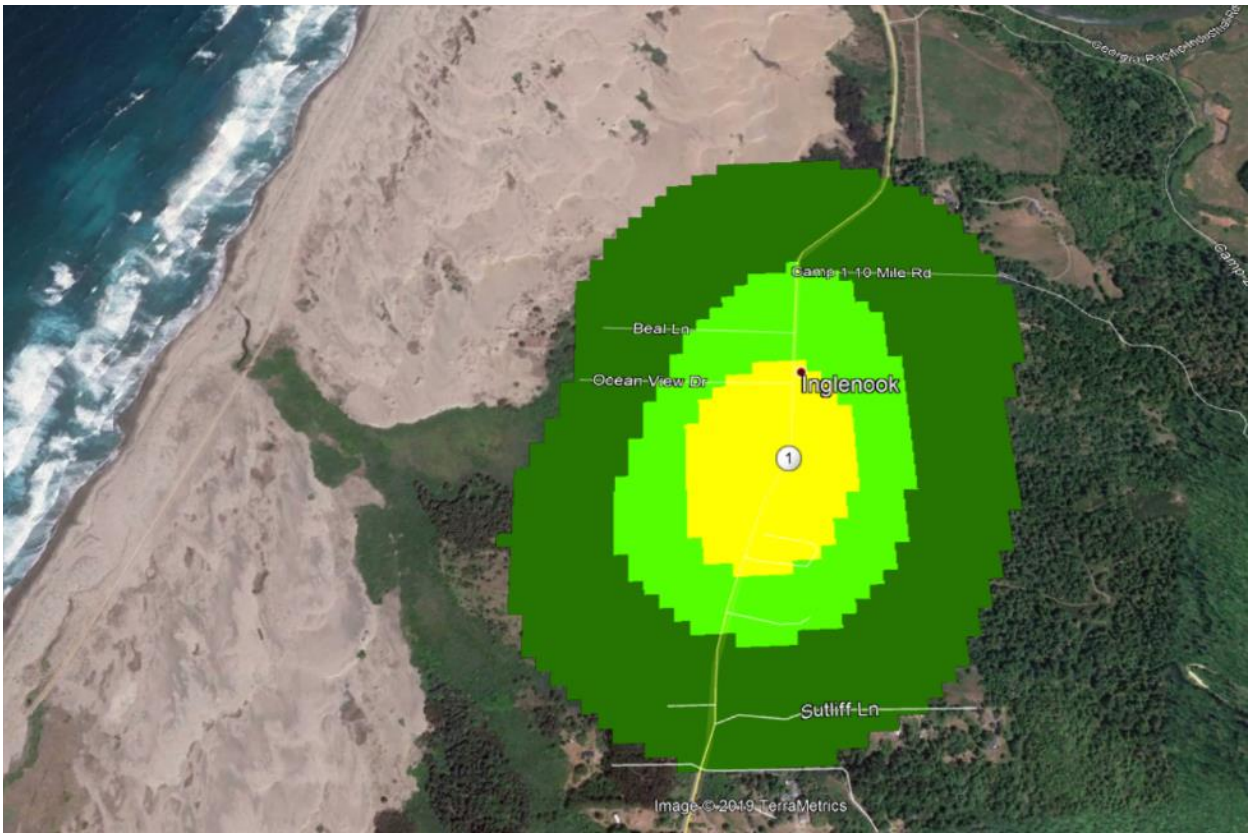
Camp 1-10 Mile Rd
Beal Ln
Ocean View Dr
Inglenook
1
Sutliff Ln
Image © 2019 TerraMetrics


**1D**




**1E**

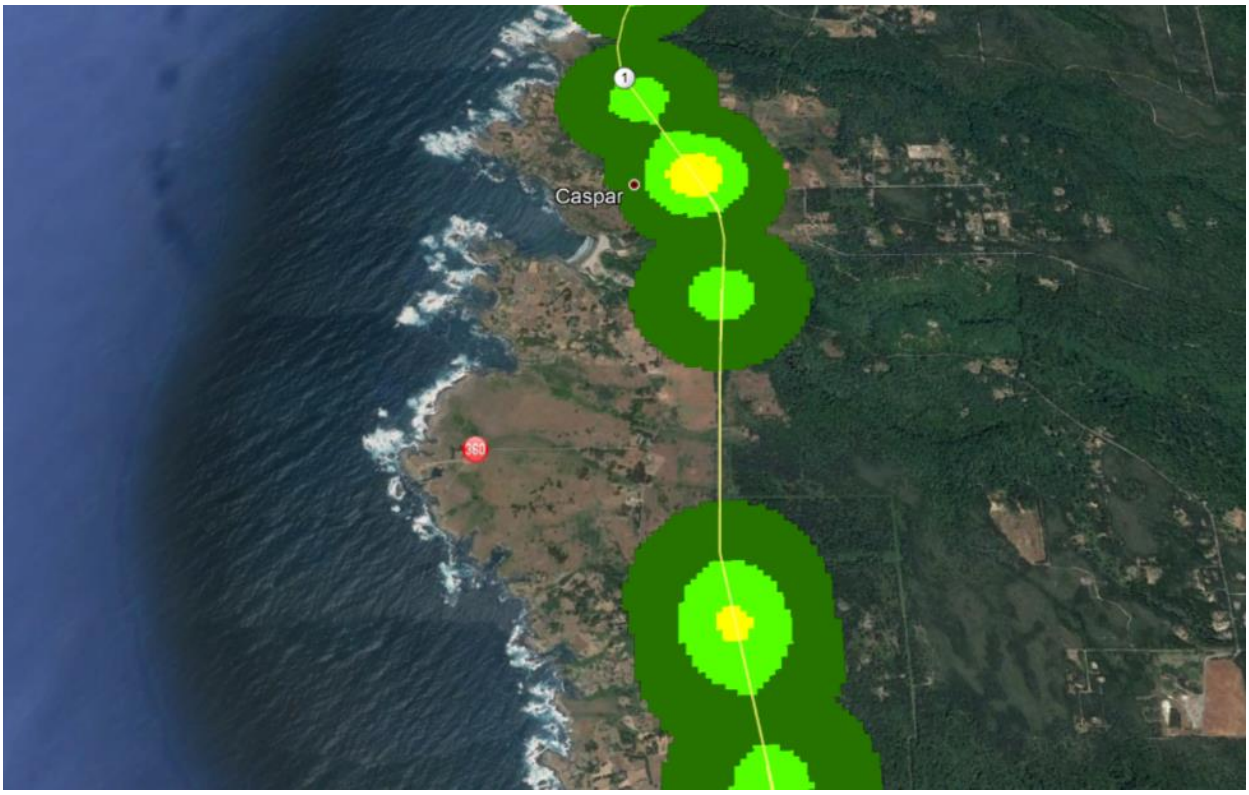


**1F**

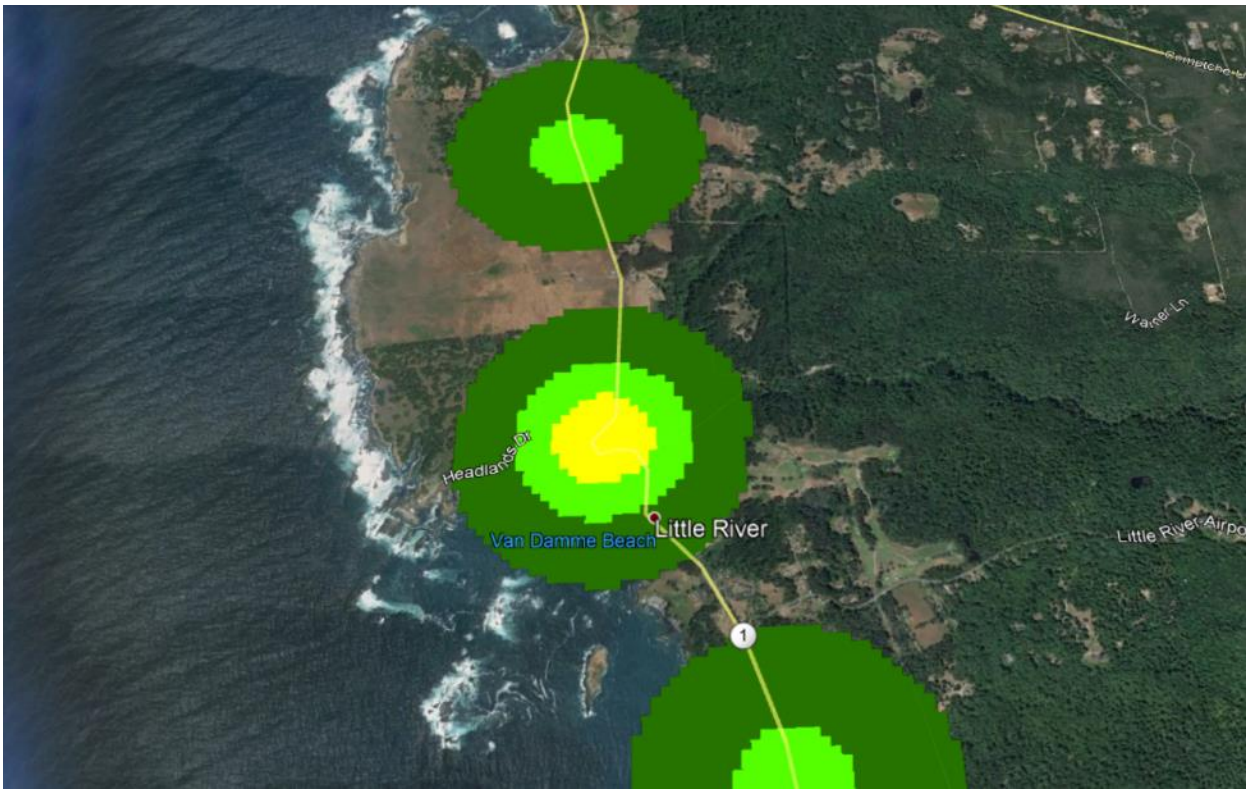


**1G**

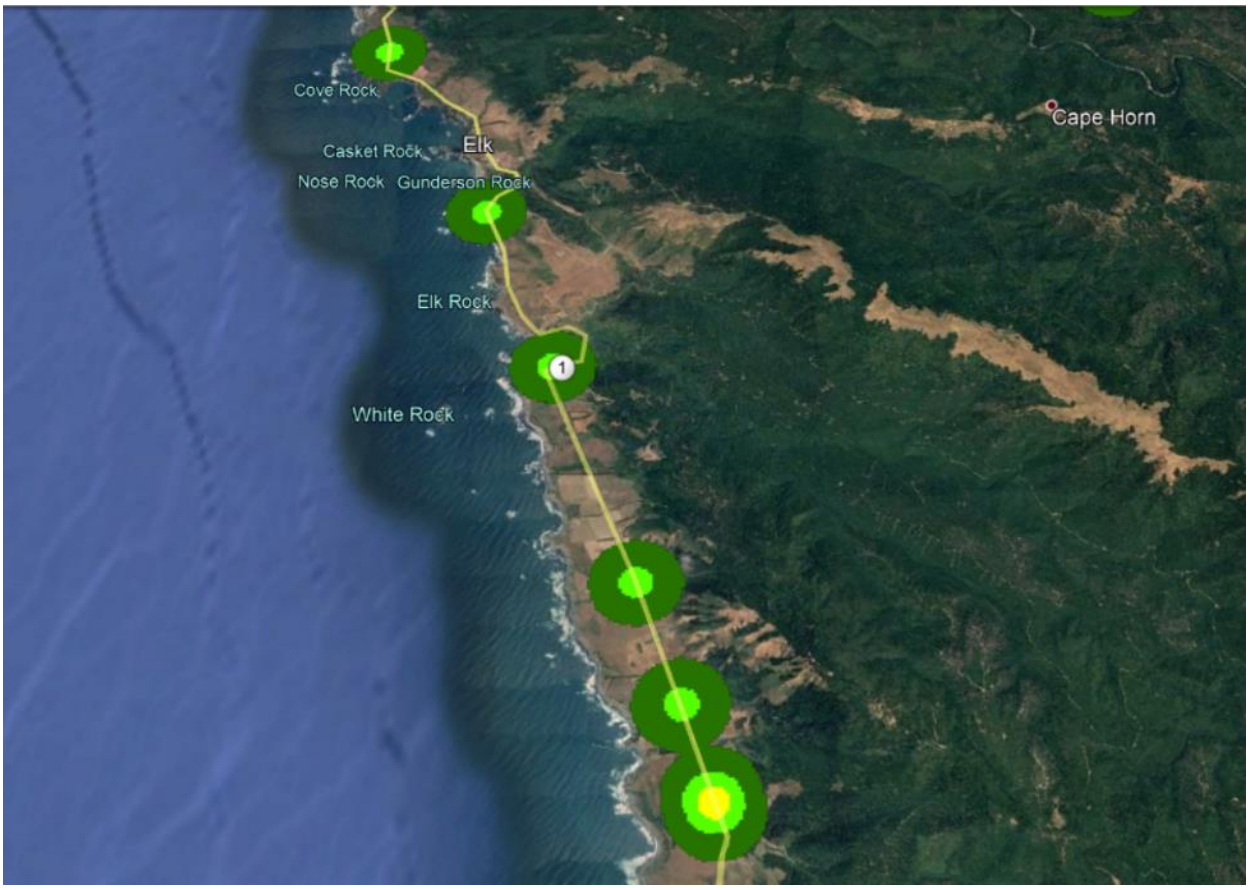
Cove Rock
Casket Rock
Elk
Nose Rock
Gunderson Rock
Cape Horn
Elk Rock
1
White Rock


**1H**

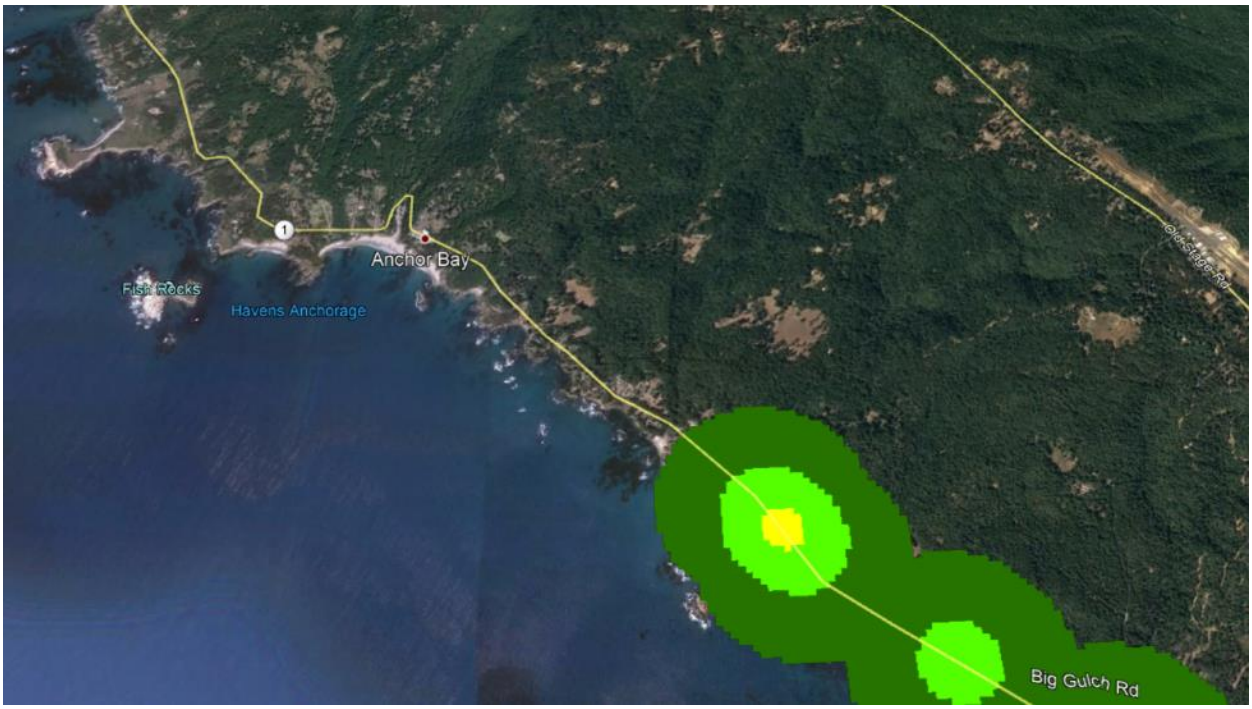


**1I**

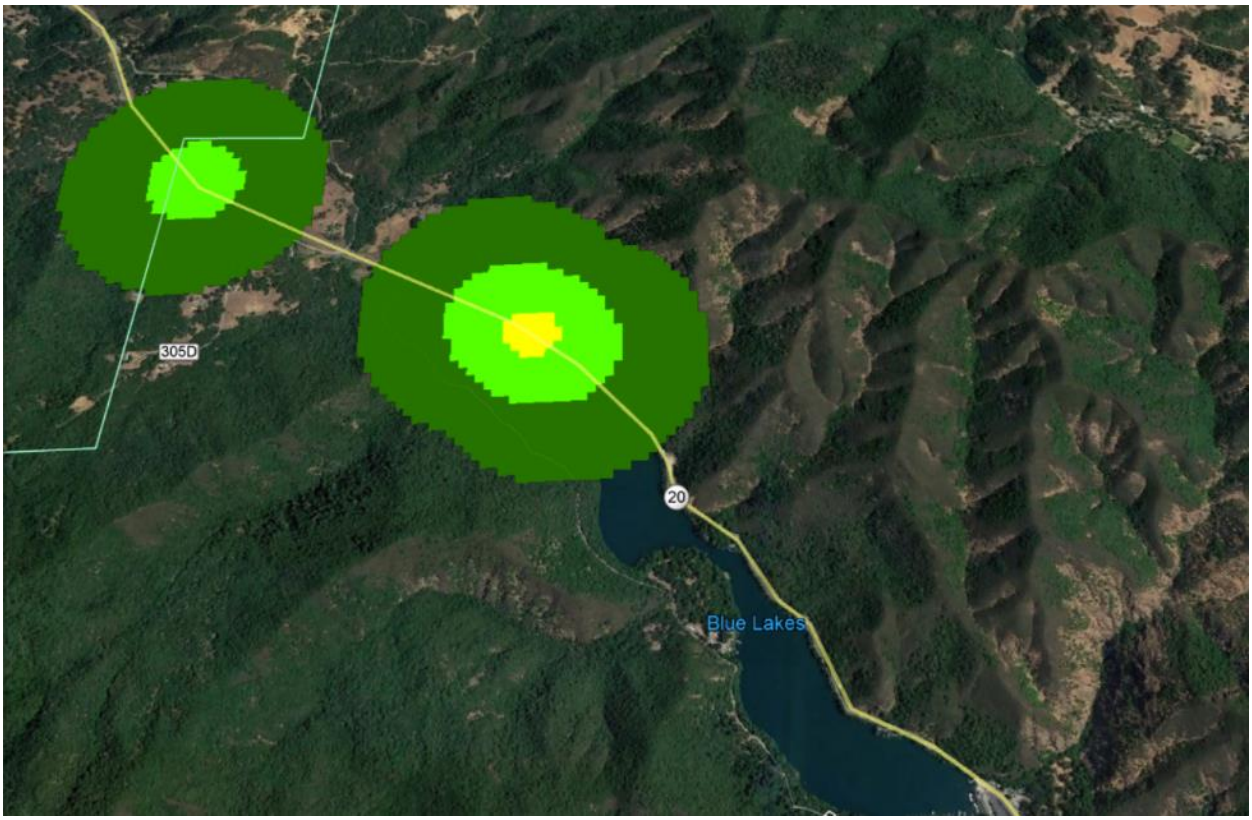

**1J**

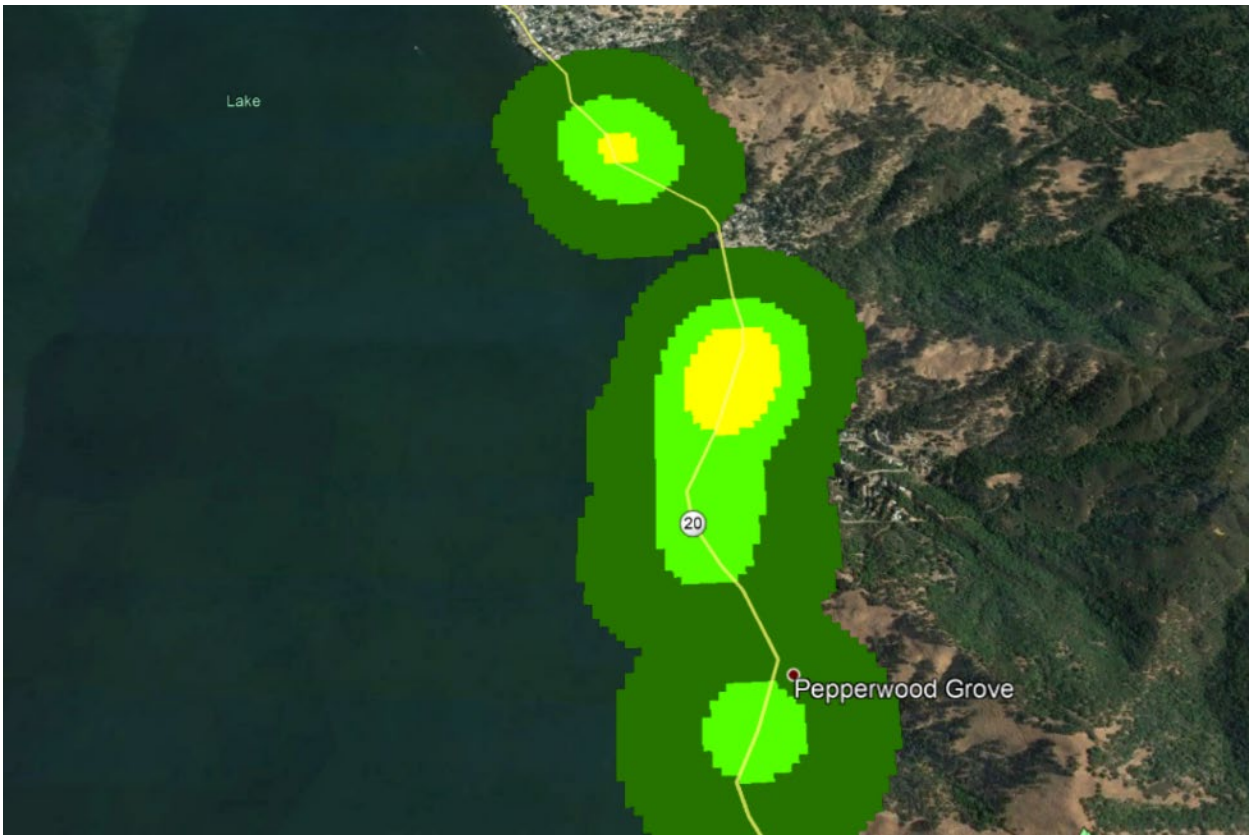

**1K**

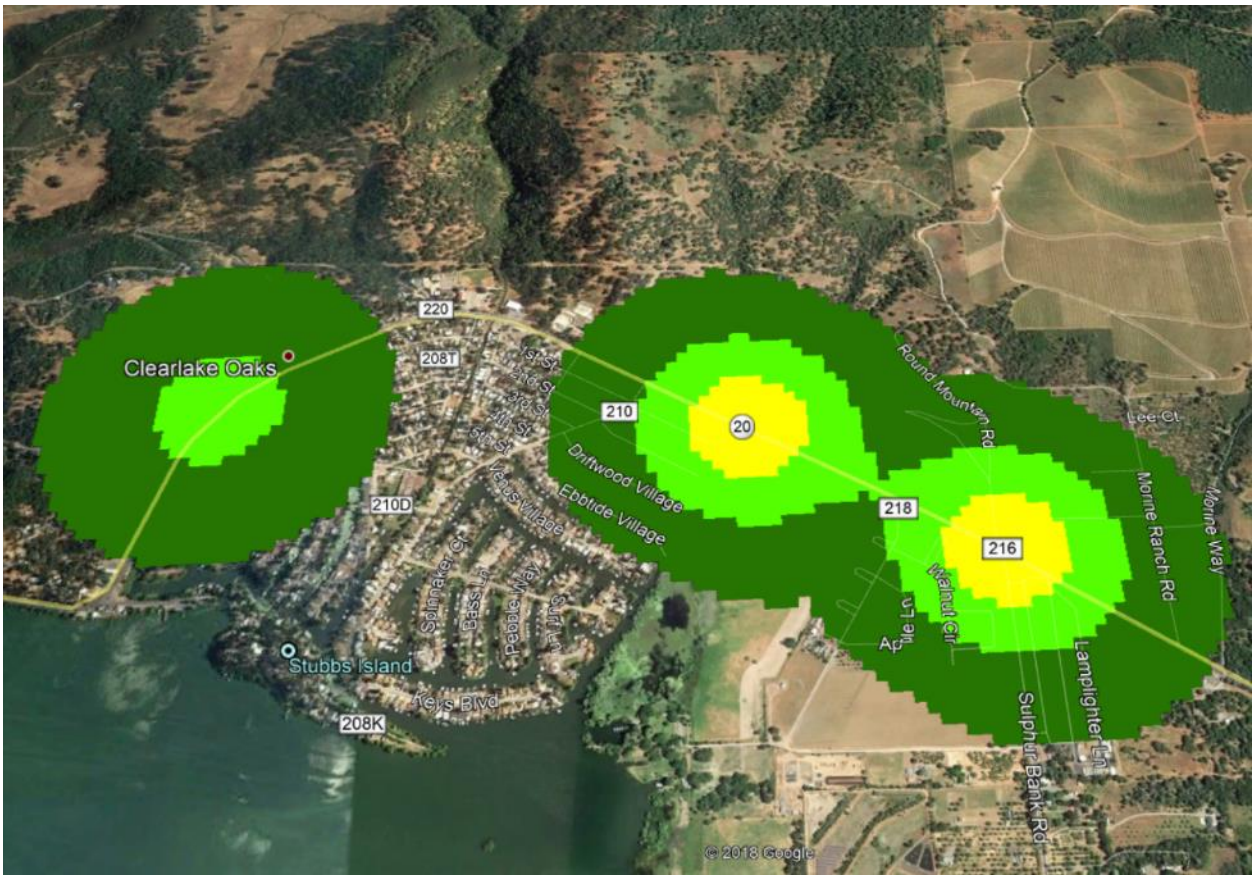
Clearlake Oaks
220
2081
210
20
210D
218
216
208K
Stubbs Island
Driftwood Village
Ebbtide Village
Round Mountain Rd
Morrine Ranch Rd
Morrine Way
Walnut Cir
Lamplighter Ln
Sulphur Bank Rd
Lee Ct
Peninsula Dr
Surf Ln
Kelsey Creek Dr
Kelsey Creek Rd
Kelsey Creek Ln
Kelsey Creek Ct
Kelsey Creek Pl
Kelsey Creek Way
Kelsey Creek Cir
Kelsey Creek Terrace
Kelsey Creek Court
Kelsey Creek Place
Kelsey Creek Lane
Kelsey Creek Circle
Kelsey Creek Boulevard
Kelsey Creek Avenue
Kelsey Creek Street
Kelsey Creek Drive
Kelsey Creek Road
Kelsey Creek Trail
Kelsey Creek Parkway
Kelsey Creek Highway
Kelsey Creek Freeway
Kelsey Creek Expressway
Kelsey Creek Turnpike
Kelsey Creek Interstate
Kelsey Creek Alley
Kelsey Creek Path
Kelsey Creek Walk
Kelsey Creek Run
Kelsey Creek Crossing
Kelsey Creek Bridge
Kelsey Creek Tunnel
Kelsey Creek Overpass
Kelsey Creek Underpass
Kelsey Creek Interchange
Kelsey Creek Intersection
Kelsey Creek Roundabout
Kelsey Creek Traffic Circle
Kelsey Creek Rotary
Kelsey Creek Square
Kelsey Creek Plaza
Kelsey Creek Mall
Kelsey Creek Shopping Center
Kelsey Creek Strip Mall
Kelsey Creek Outlet Mall
Kelsey Creek Factory Outlet
Kelsey Creek Discount Mall
Kelsey Creek Warehouse
Kelsey Creek Store
Kelsey Creek Shop
Kelsey Creek Boutique
Kelsey Creek Market
Kelsey Creek Supermarket
Kelsey Creek Hypermarket
Kelsey Creek Convenience Store
Kelsey Creek Gas Station
Kelsey Creek Service Station
Kelsey Creek Filling Station
Kelsey Creek Petrol Station
Kelsey Creek Fuel Station
Kelsey Creek Diesel Station
Kelsey Creek Electric Station
Kelsey Creek Charging Station
Kelsey Creek Battery Station
Kelsey Creek Solar Station
Kelsey Creek Wind Station
Kelsey Creek Hydro Station
Kelsey Creek Nuclear Station
Kelsey Creek Coal Station
Kelsey Creek Oil Station
Kelsey Creek Gas Station
© 2018 Google

**1L**




**1M**




**1N**



**1O**

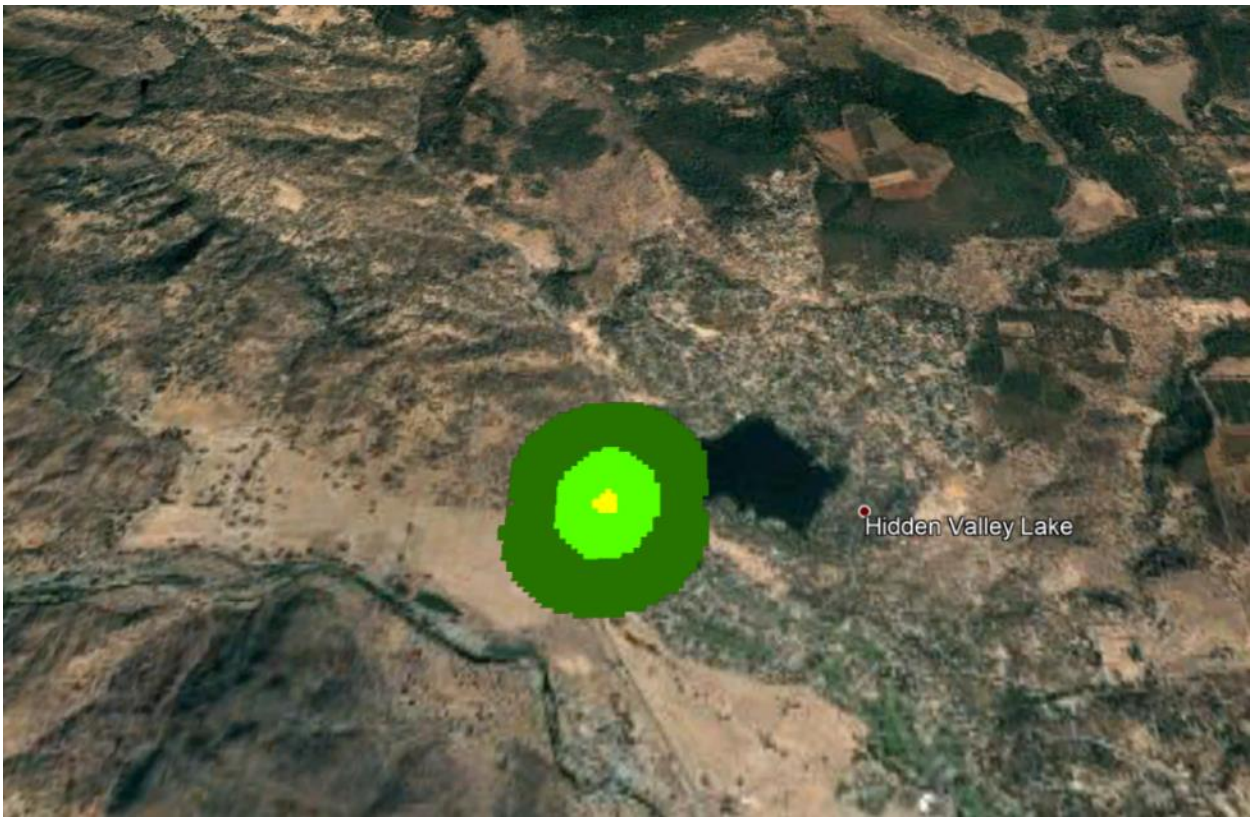


**CARCASS DATA DISTRICT 2**

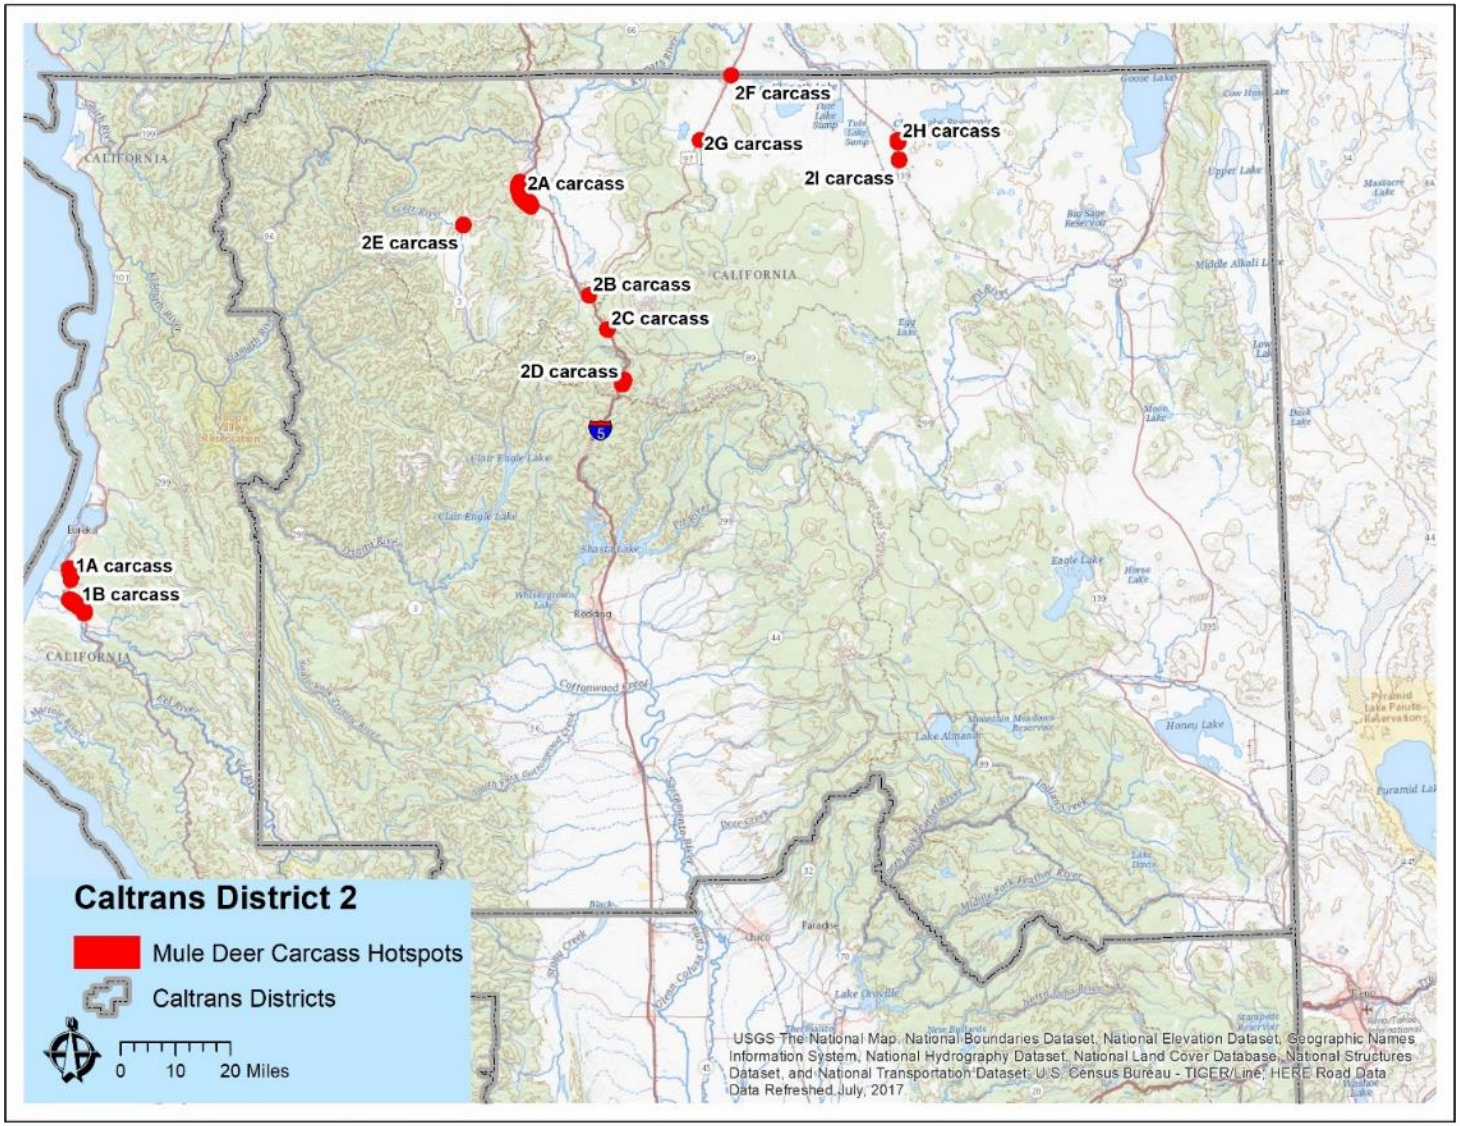


Hot spots in District 2 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**2A**

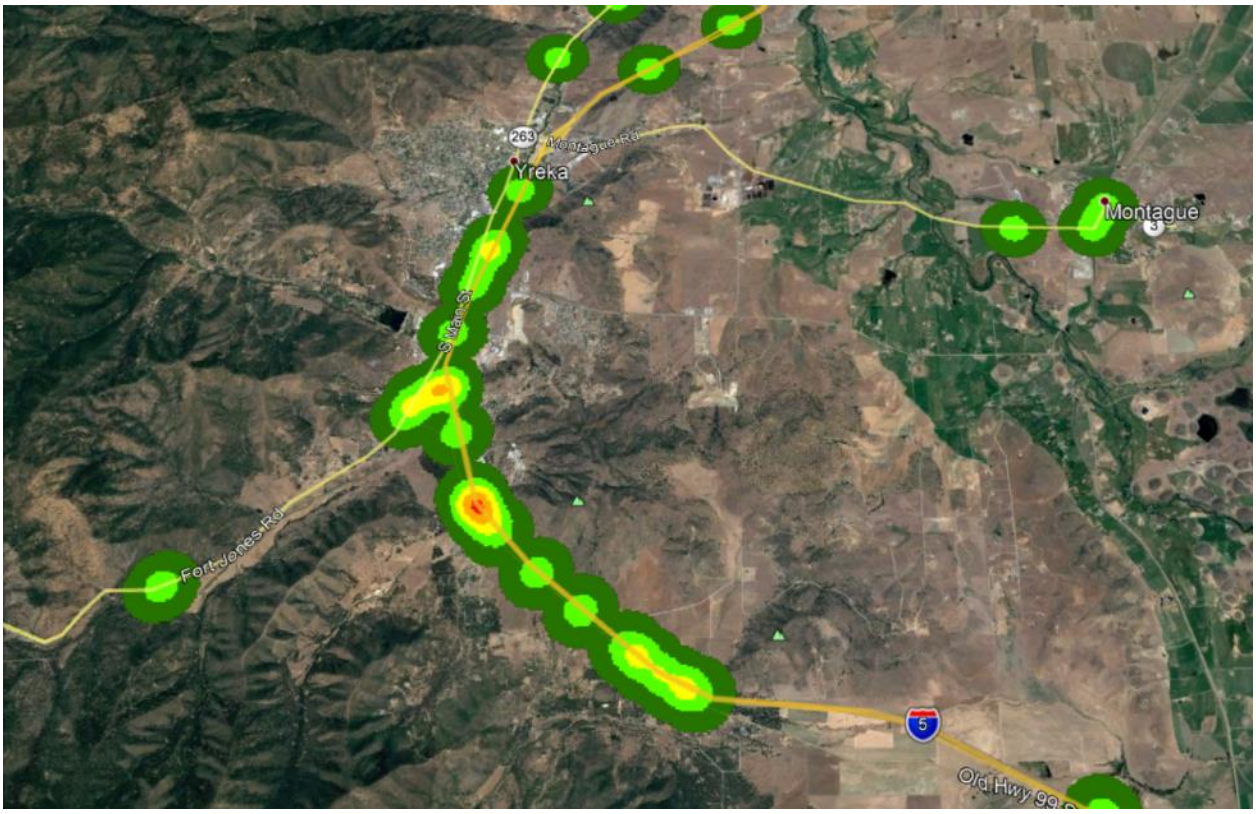
263
Montague Rd
Yreka
Montague
3
S Main St
Fort Jones Rd
5
Old Hwy 99


**2B**



**2C**

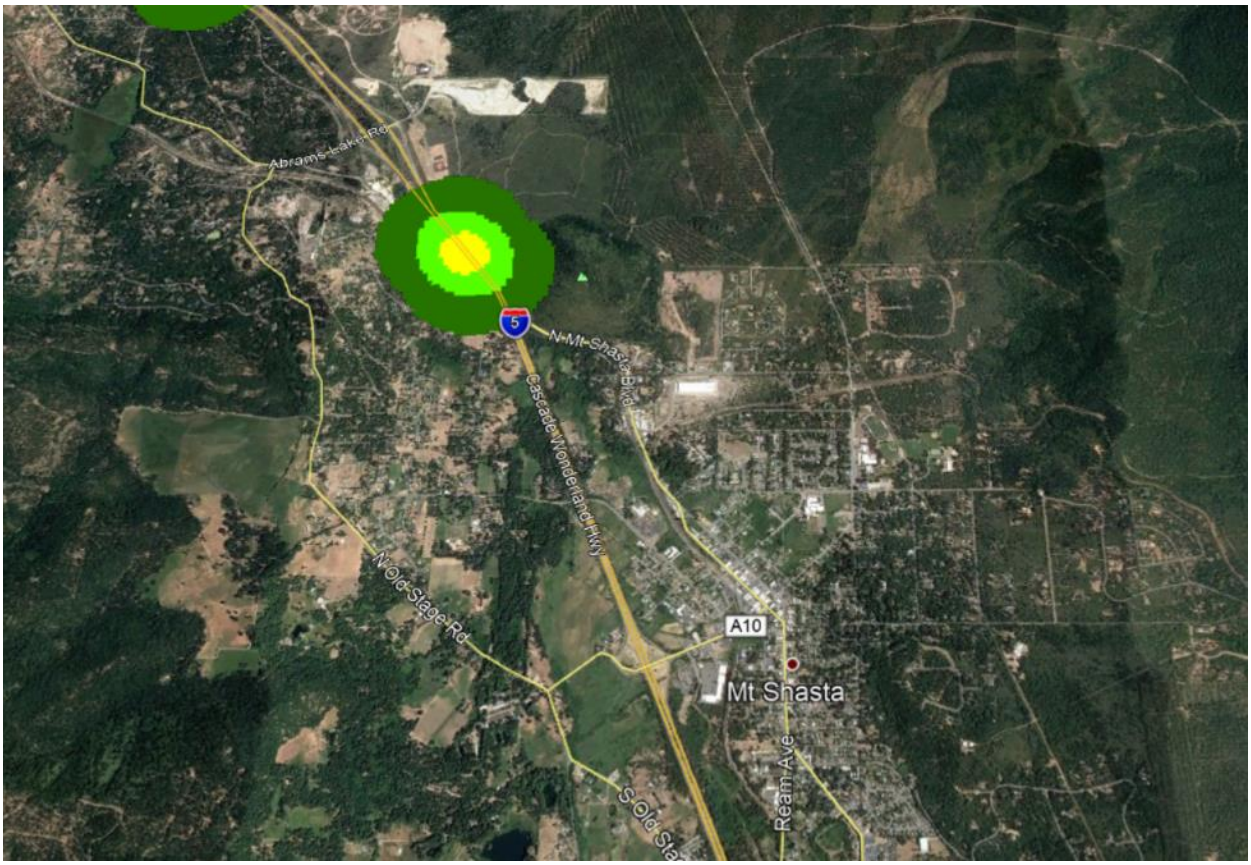
Abrams Lake Rd
5
N Mt Shasta Blvd
Cascade Wonderland Hwy
N Old Stage Rd
A10
Mt Shasta
Ream Ave

**2D**

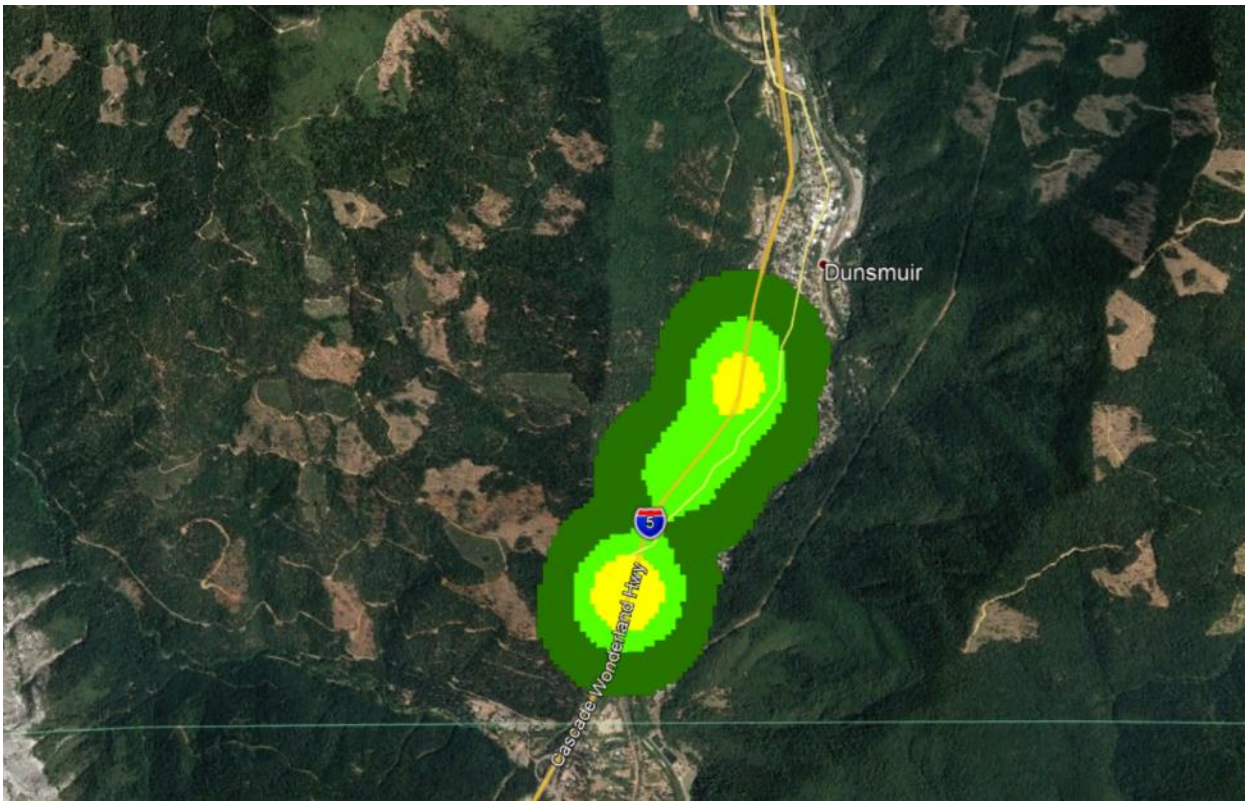

**2E**


Fort Jones Rd
3
Douglas St
N Main St
Diamond St
Scott River Rd
Butte St
Fort Jones
Newton St
Carlock St
East St

**2F**



**2G**



**2H**


Great Northern Rd
Hannchen
Stone Island
140
121
120
111
139
© 2018 Google


**2I**



**CARCASS DATA DISTRICT 3**


Insufficient data

**CARCASS DATA DISTRICT 4**

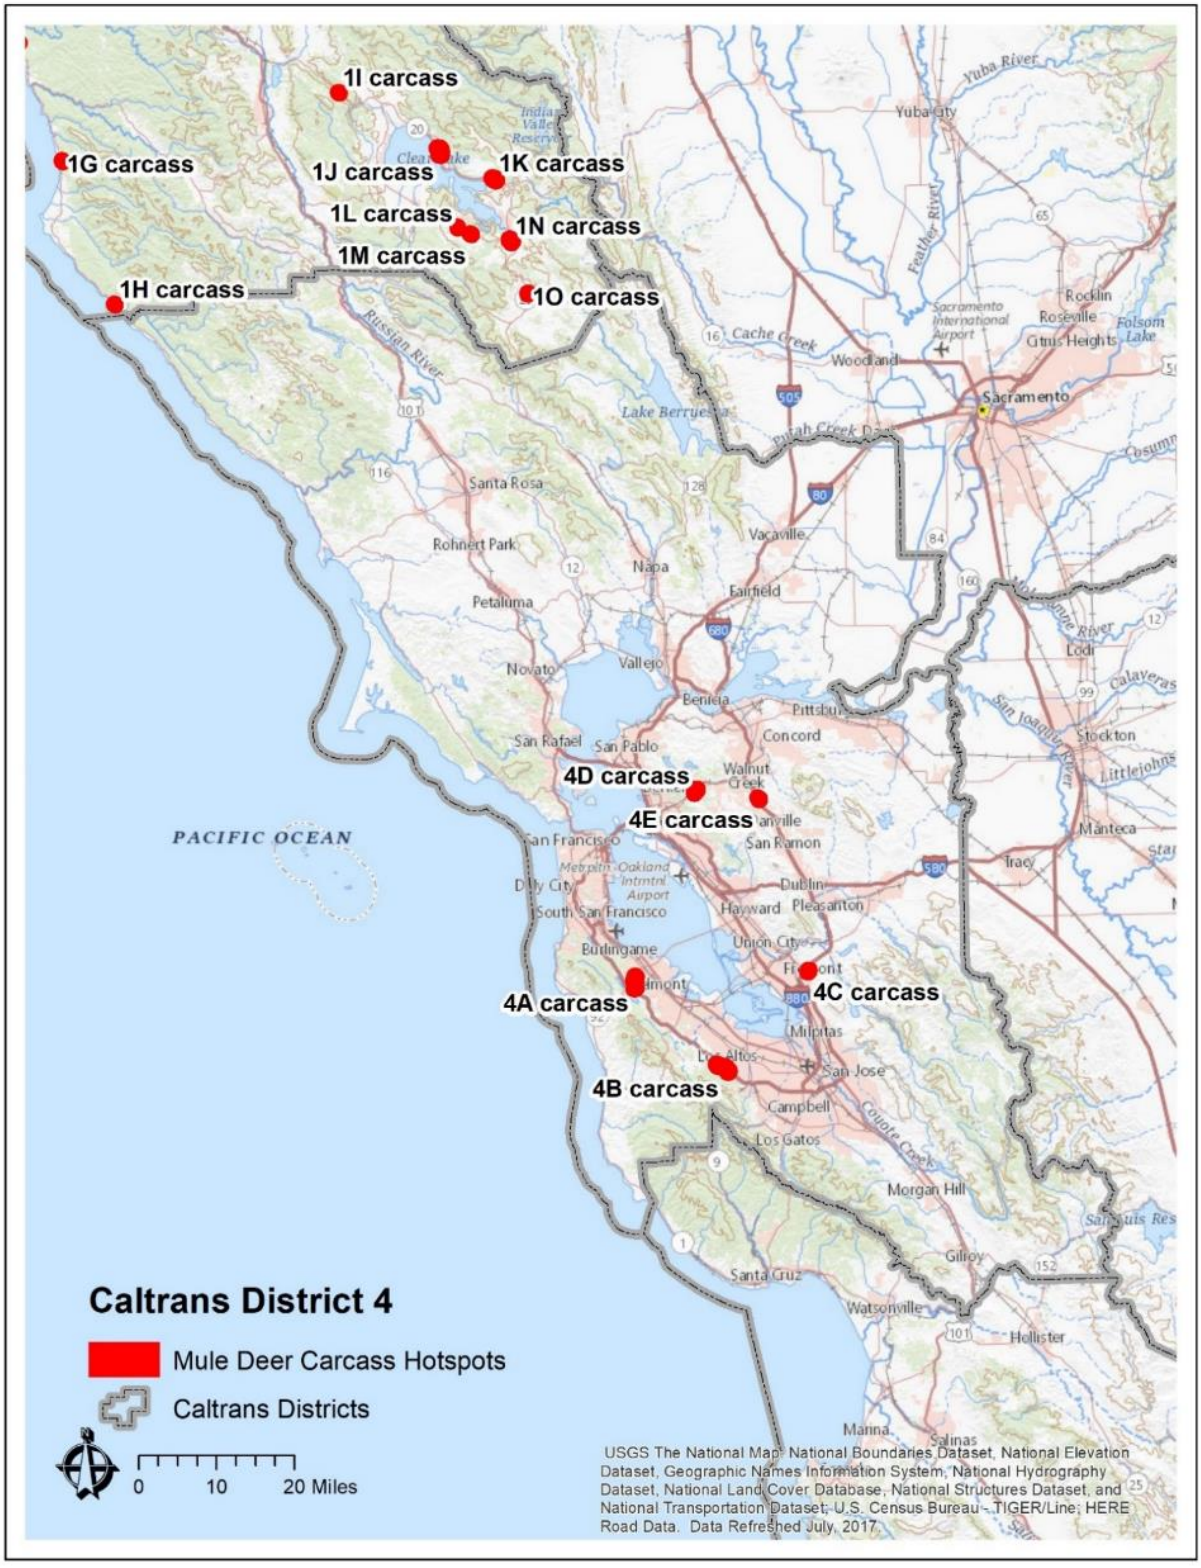



Hot spots in District 4 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**4A**

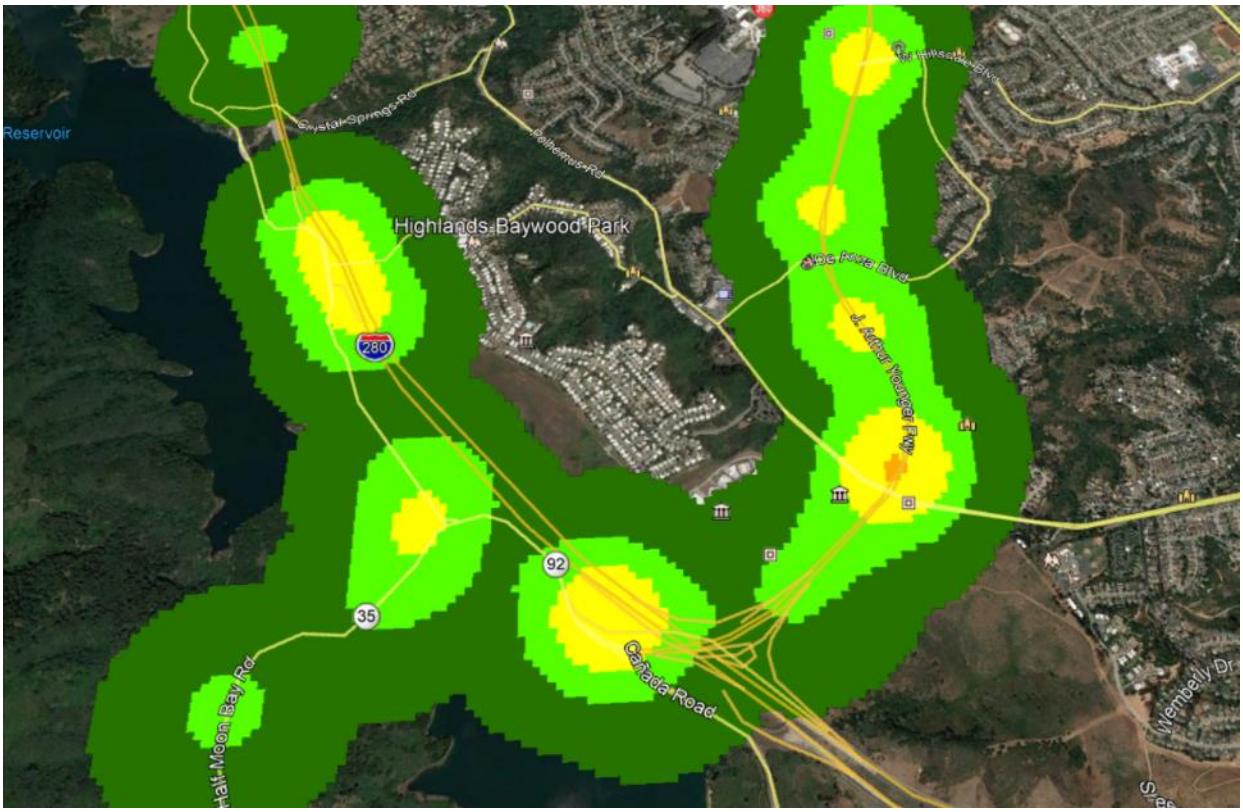
Reservoir
Crystal Springs Rd
Highlands-Baywood Park
280
92
35
Canada Road
Half Moon Bay Rd
Wembely Dr


**4B**

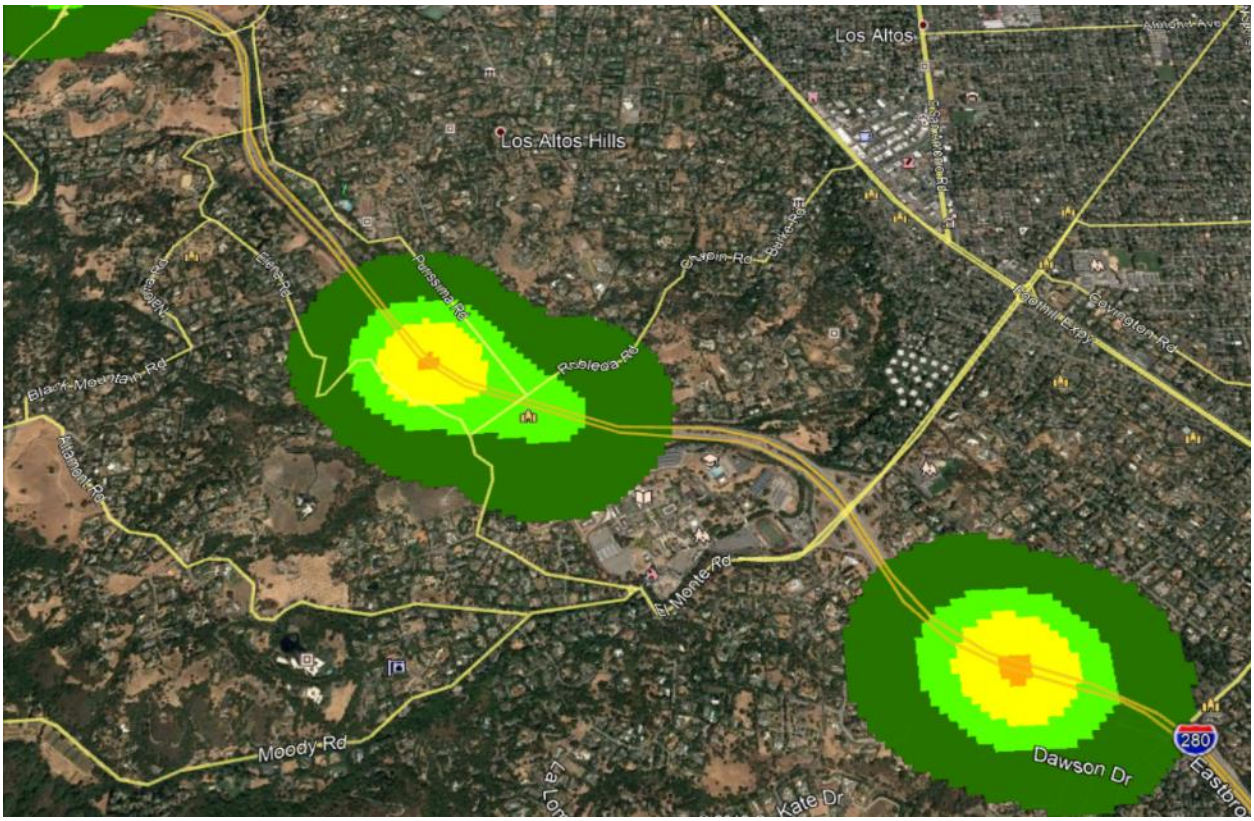

**4C**

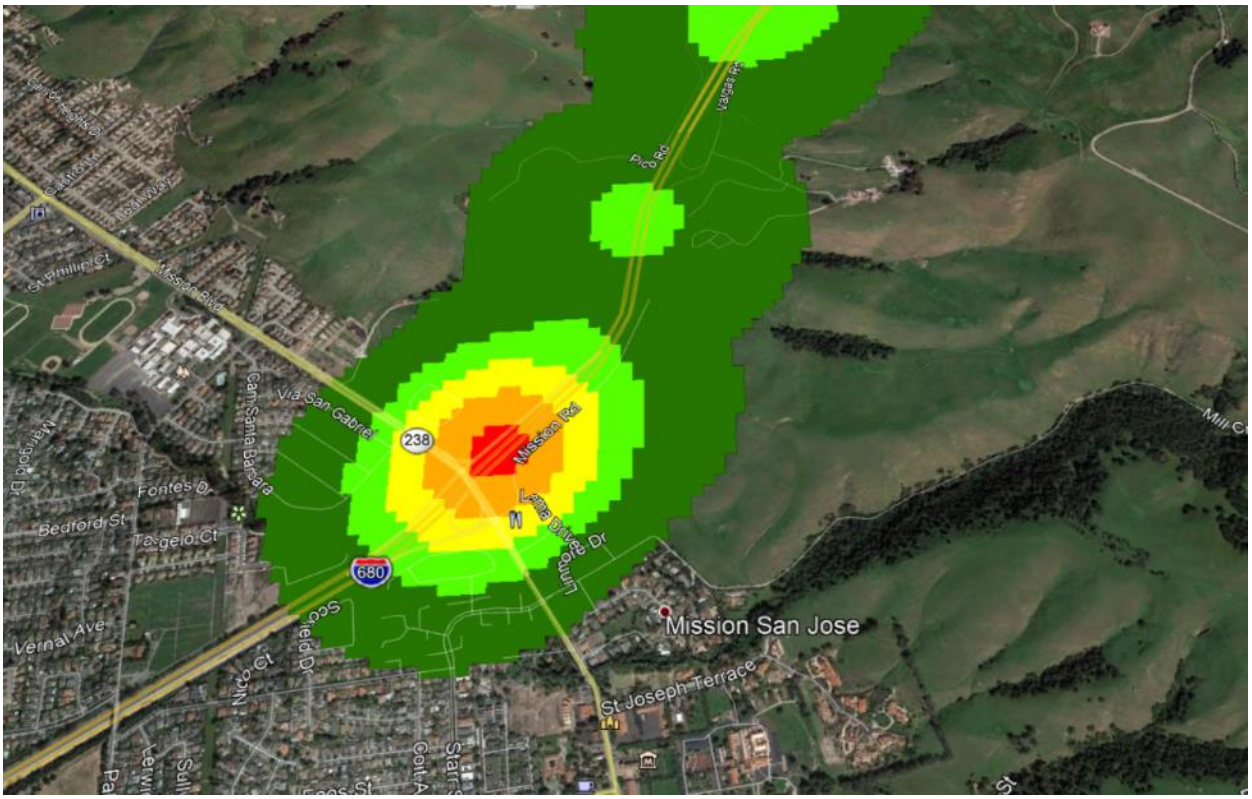
Pico Rd
Vargas Rd
Via San Gabriel
238
Mission Rd
Fontes Dr
Bedford St
Tageio Ct
680
Vernal Ave
Mission San Jose
St Joseph Terrace

**4D**

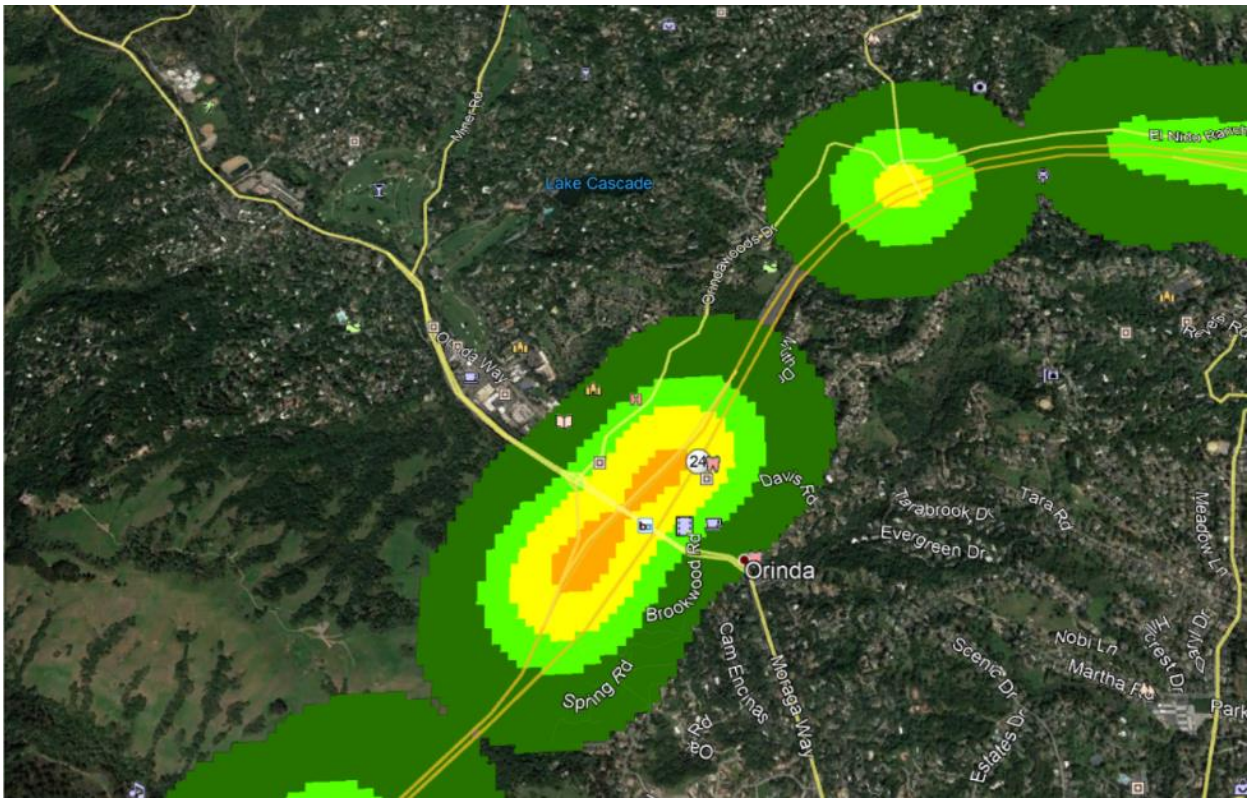
Lake Cascade
Orinda
Davis Rd
Brookwood Rd
Spring Rd
Camino Encinas
Meraga Way
Tara Rd
Evergreen Dr
Nobi Ln
Scenic Dr
Estates Dr
Meadow Ln


**4E**


Hillgrade Ave
Arbor Ln
Glade Ln
Vine Ln
Livorna Rd
Castle Crest Rd
Vista
Livorna Rd W
Laurenite Way
Entrada Verde
Casa Vallecito
Ramona Way
Finley Ln
Litina Dr
Cedar Ln
Via Don Jose
N Jackson Way
Gran Via
Alamo Way
Ridgewood Rd
Lunada Ln
Via Larga
Orchard Ct
Alamo
Donald D. Doyle Hwy
Stone Valley Rd
Doris Pl
680
Stephanie Ln
Jennifer Ln
Verna Ct
Bunce Meadows Dr
Ina Dr
David Dr
Acacia Ct

**CARCASS DATA DISTRICT 5**


Insufficient data

**CARCASS DATA DISTRICT 6**

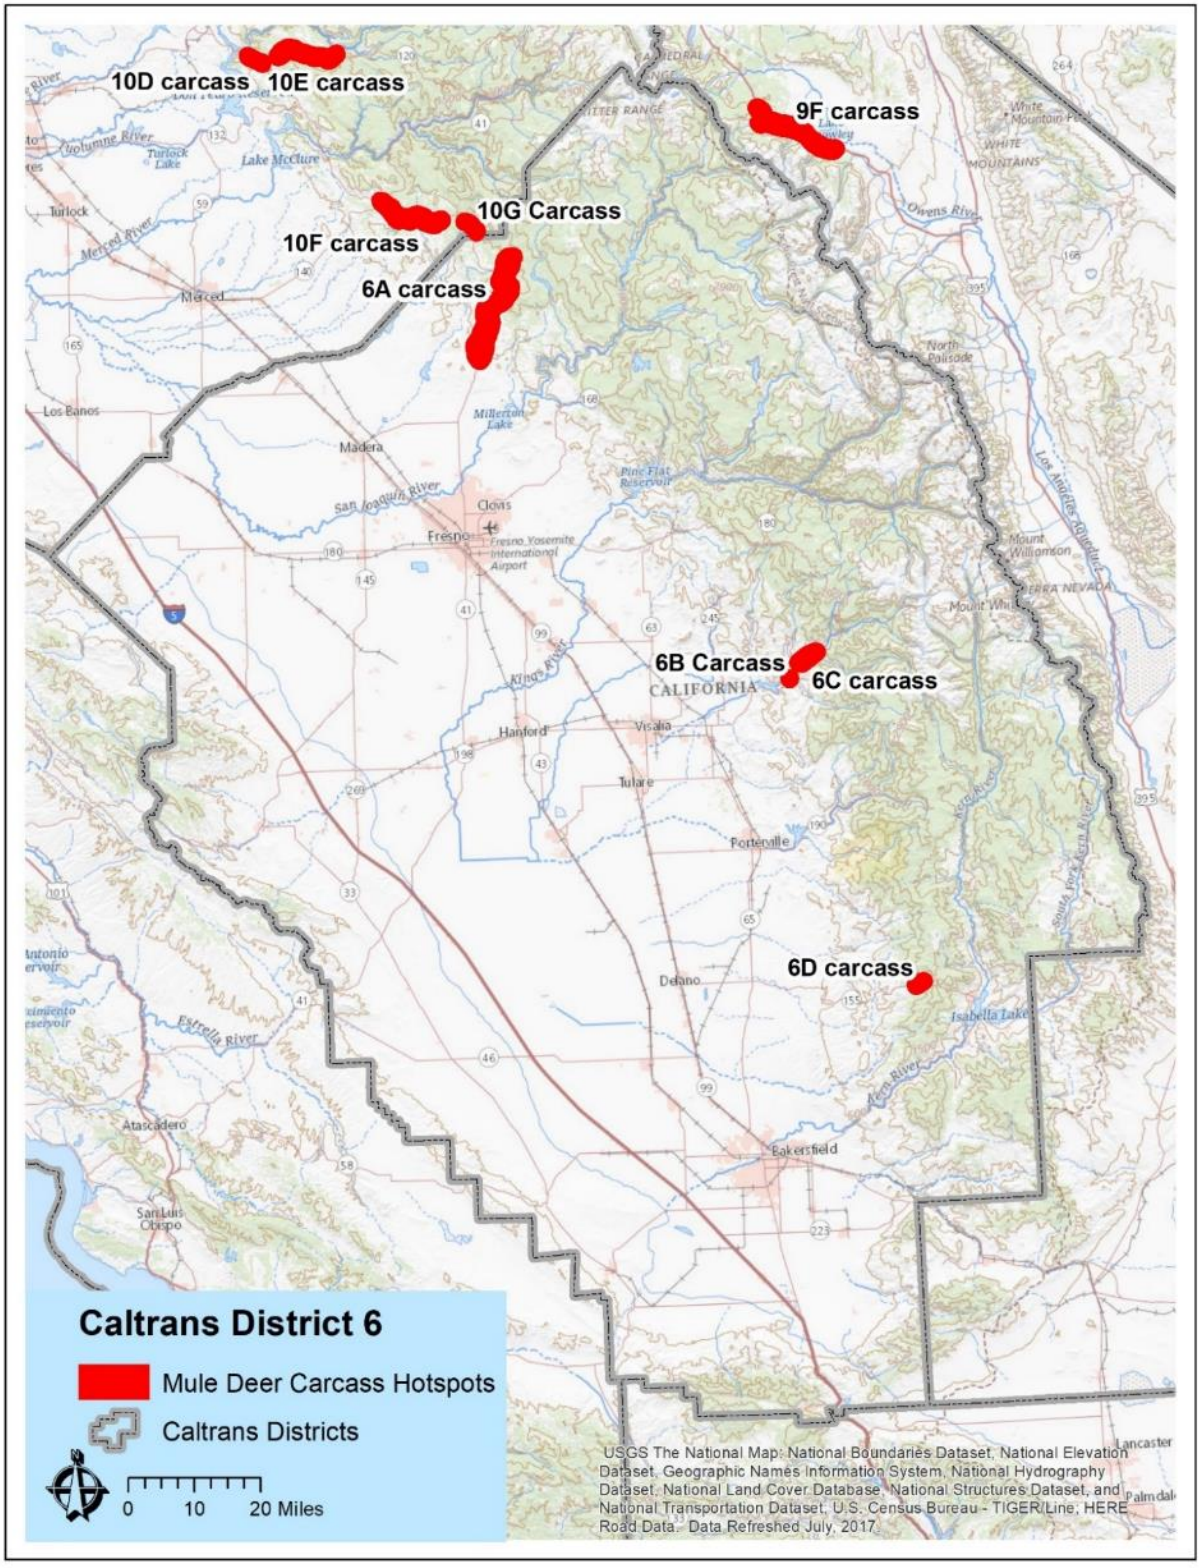



Hot spots in District 6 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**6A**

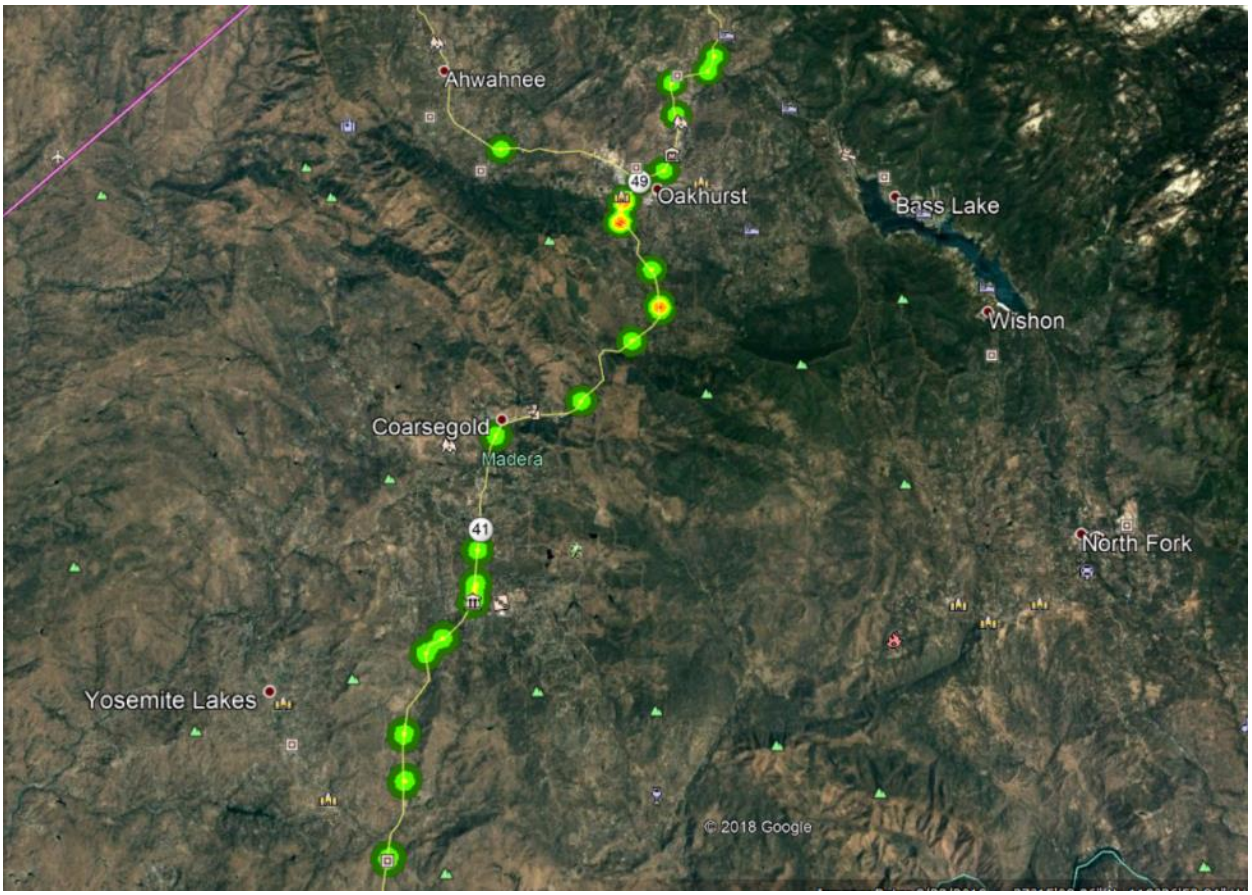
Ahwahnee
49
Oakhurst
Bass Lake
Wishon
Coarsegold
Madera
41
North Fork
Yosemite Lakes
© 2018 Google


**6B**

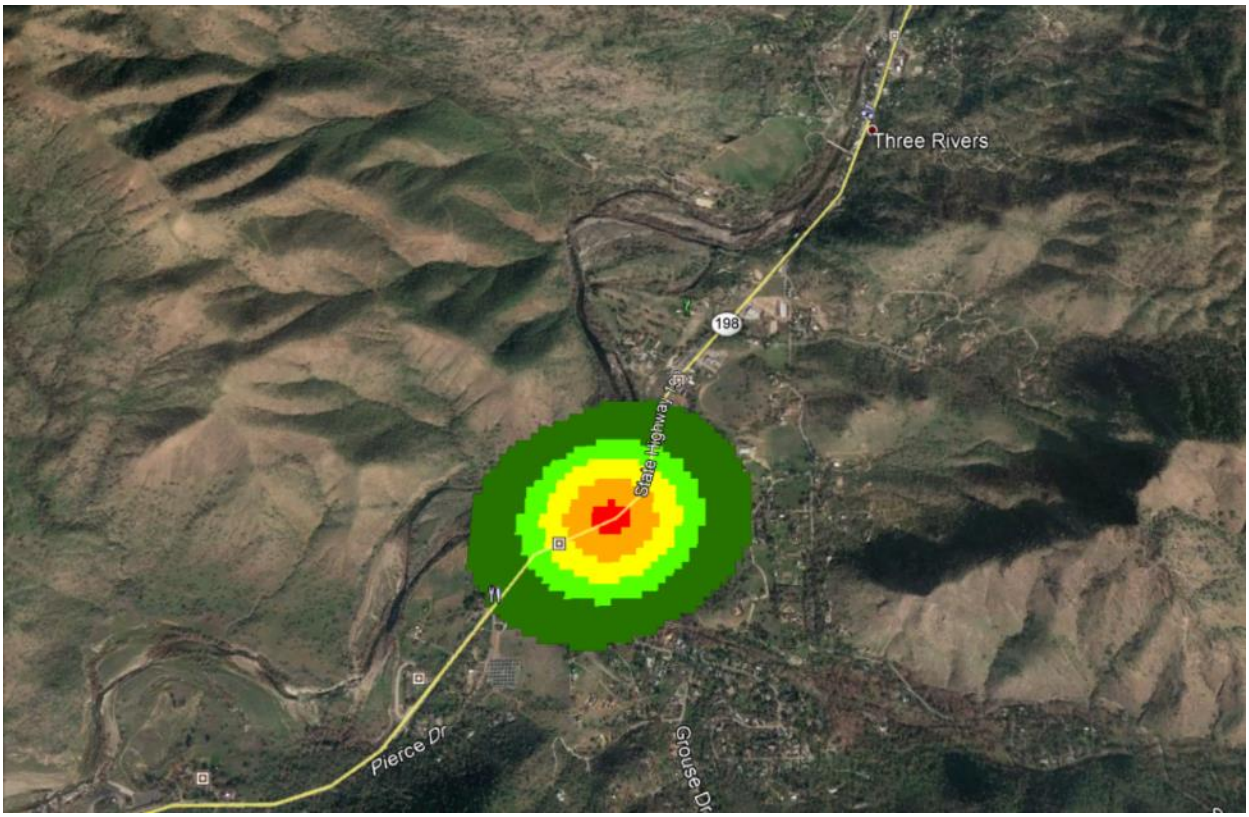

**6C**

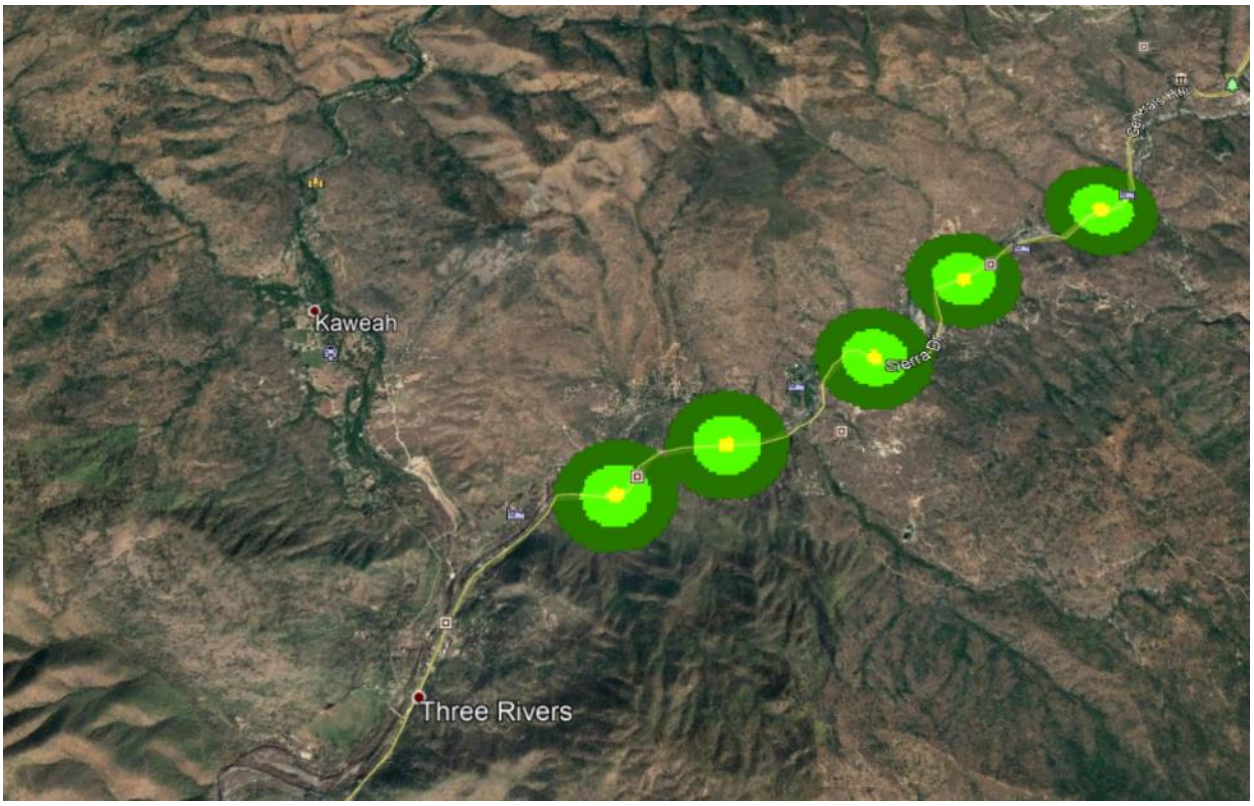

**6D**

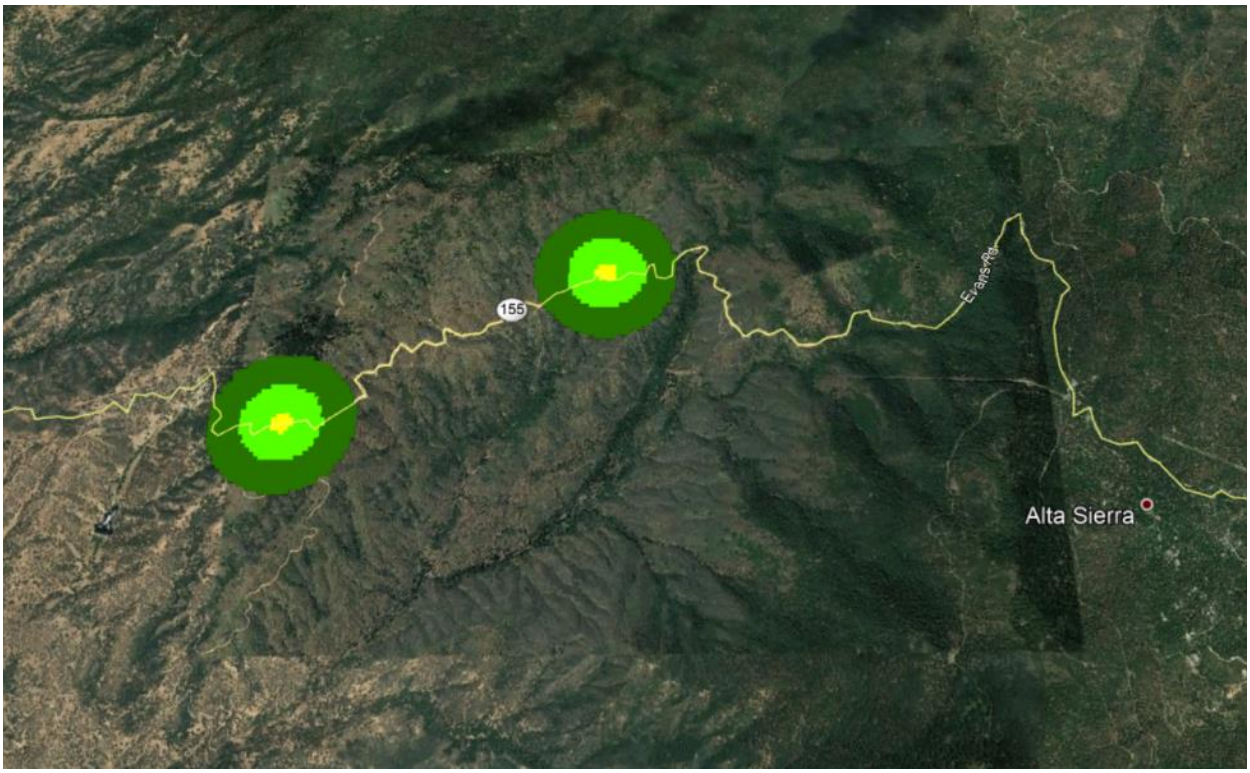


**CARCASS DATA DISTRICT 7**

Insufficient data

**CARCASS DATA DISTRICT 8**


Insufficient data

**CARCASS DATA DISTRICT 9**

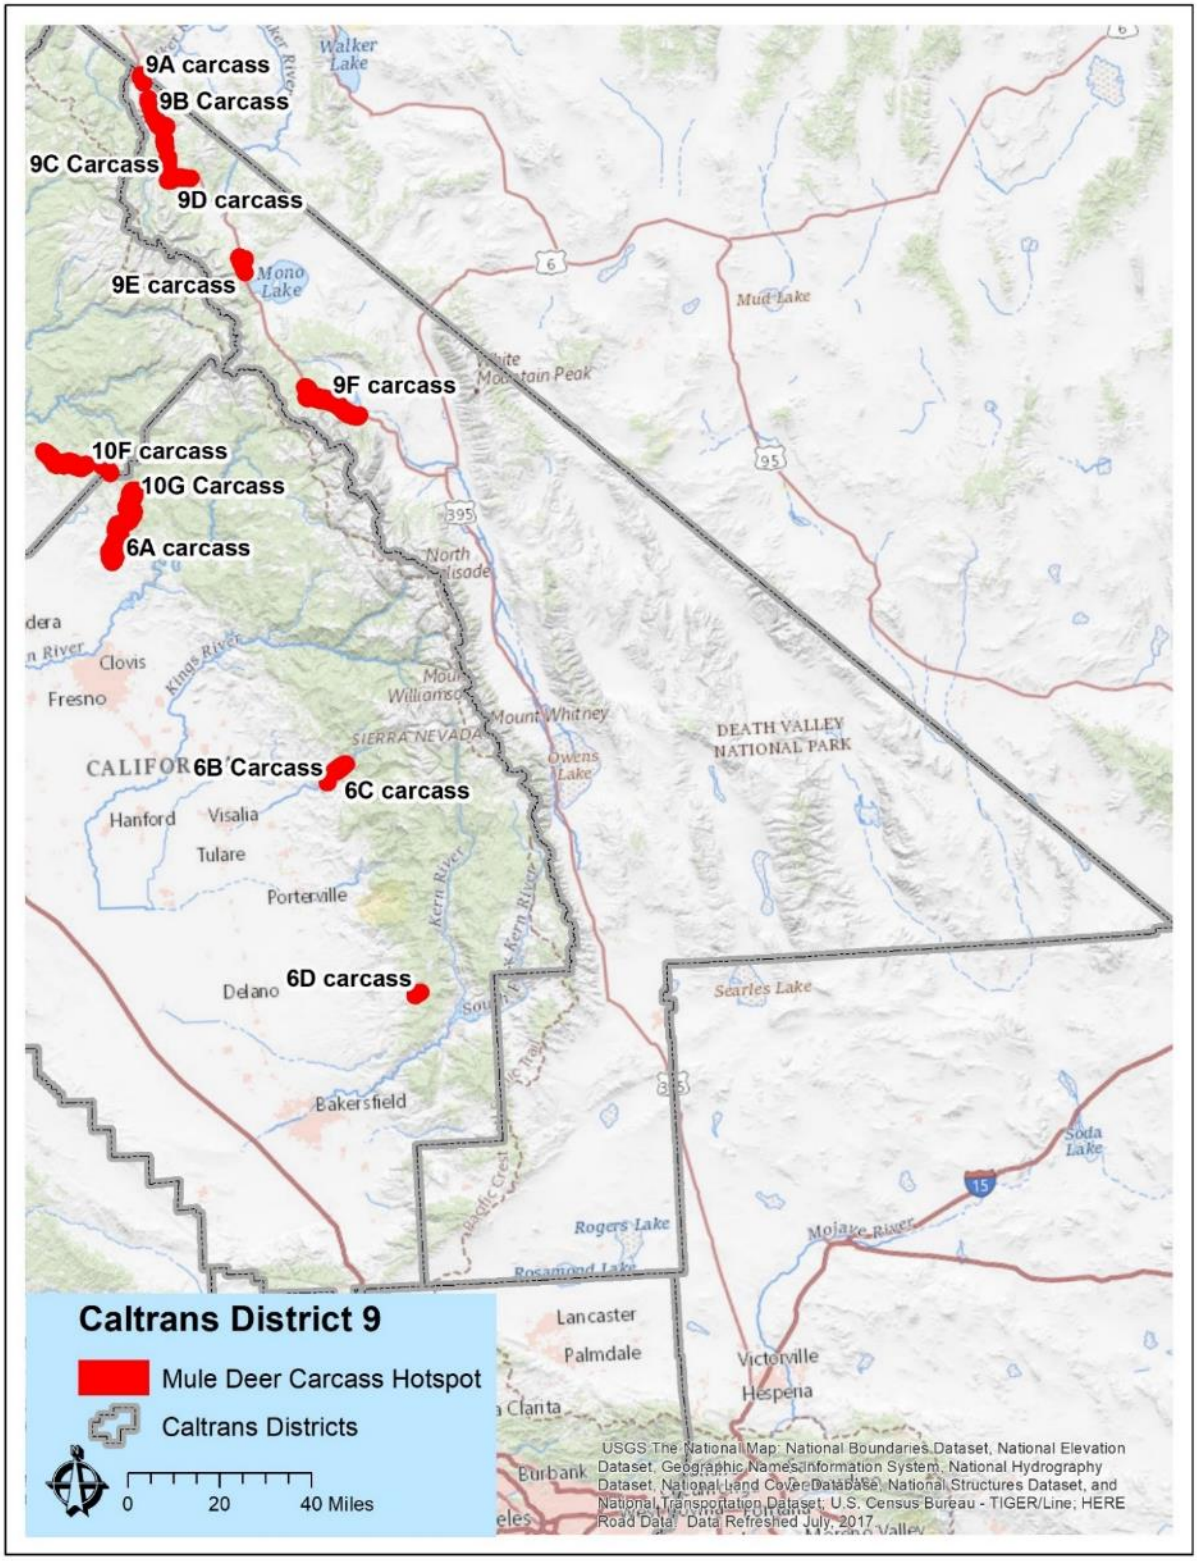



Hot spots in District 9 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**9A**

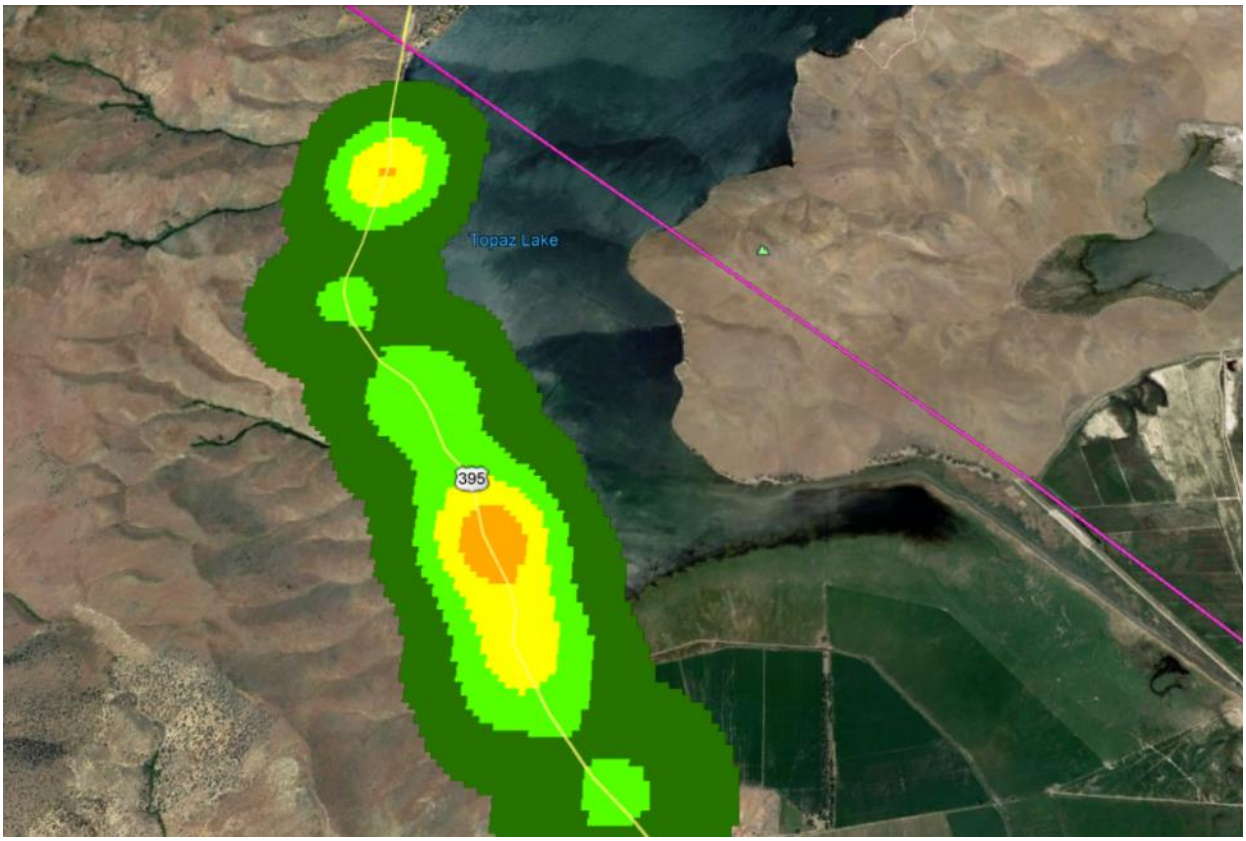


**9B**

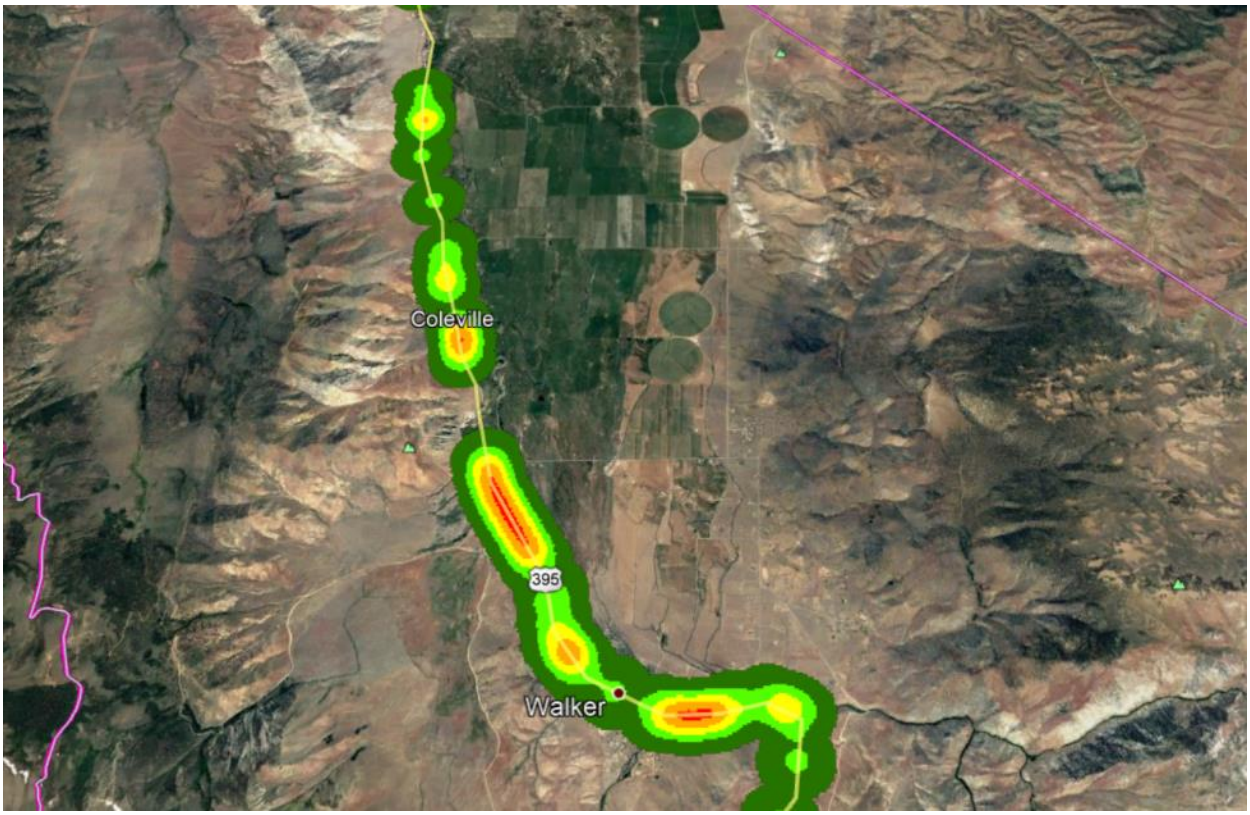


**9C**

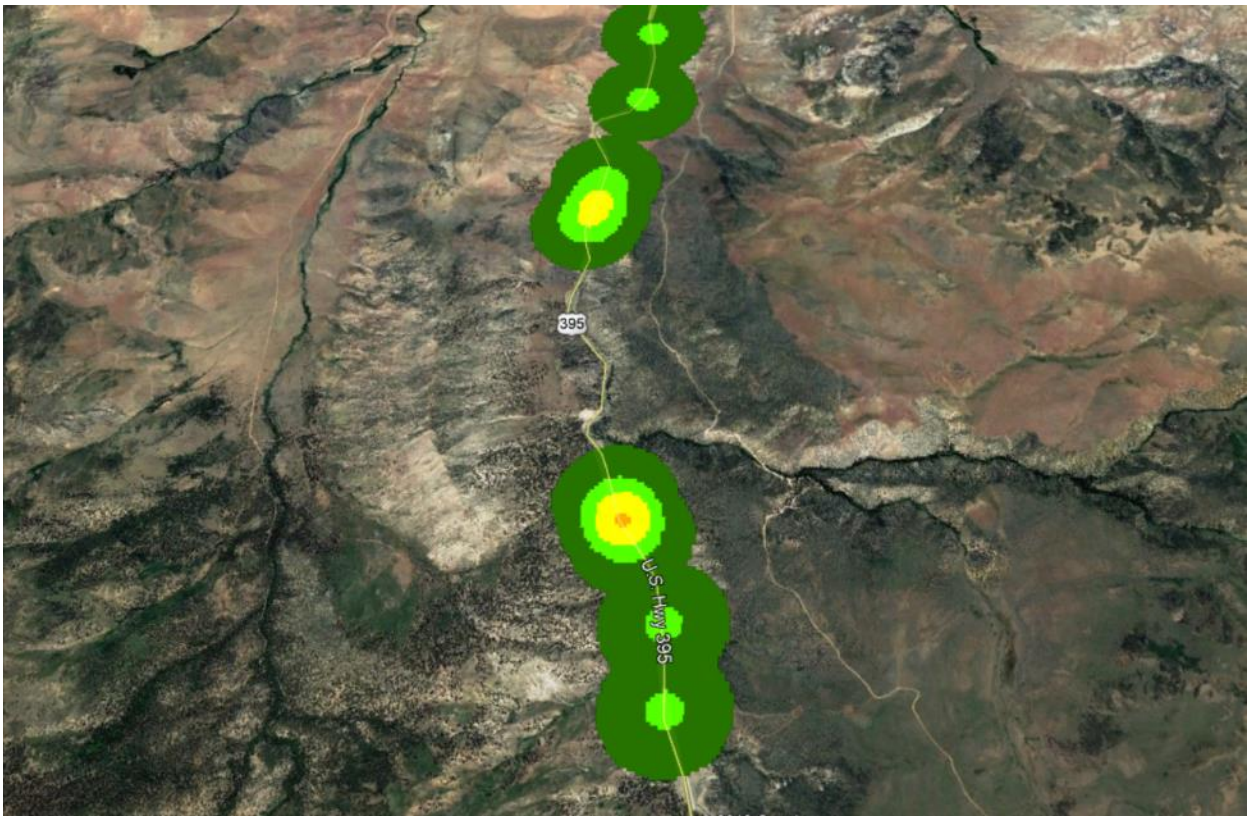


**9D**

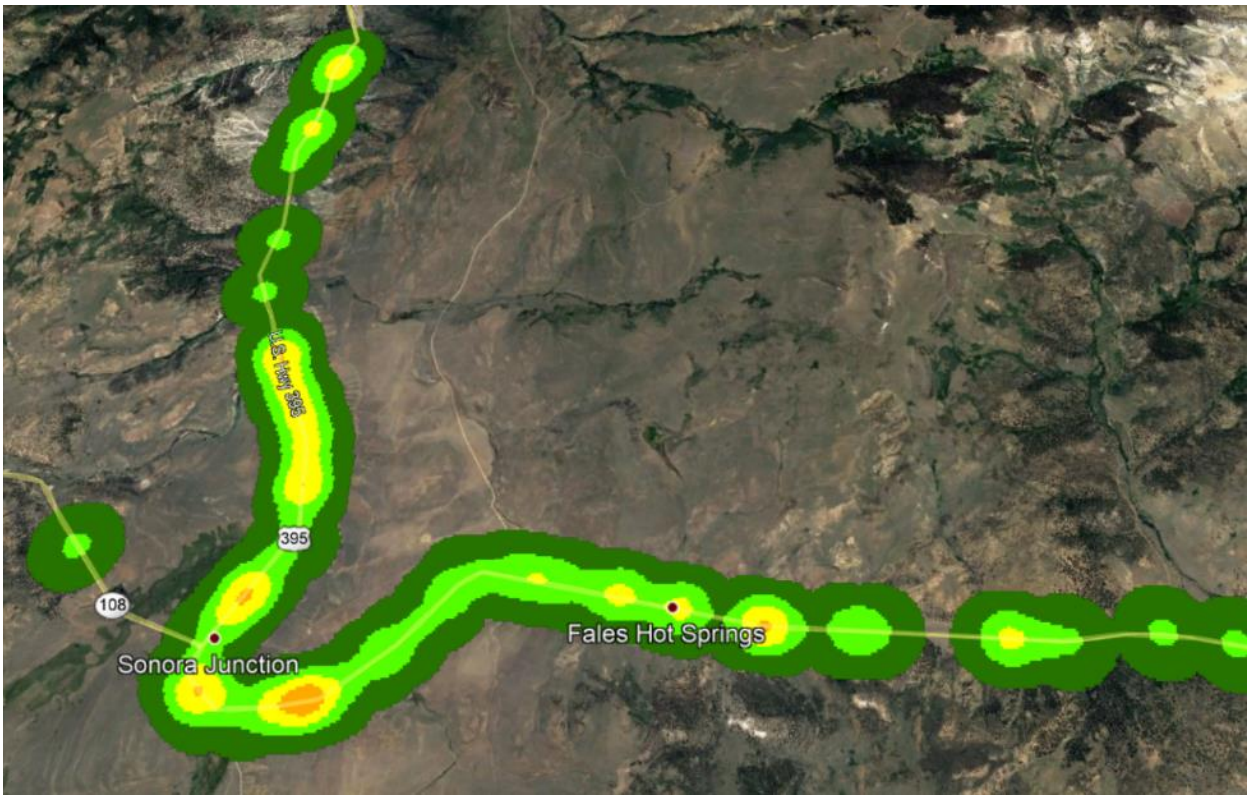


**9E**

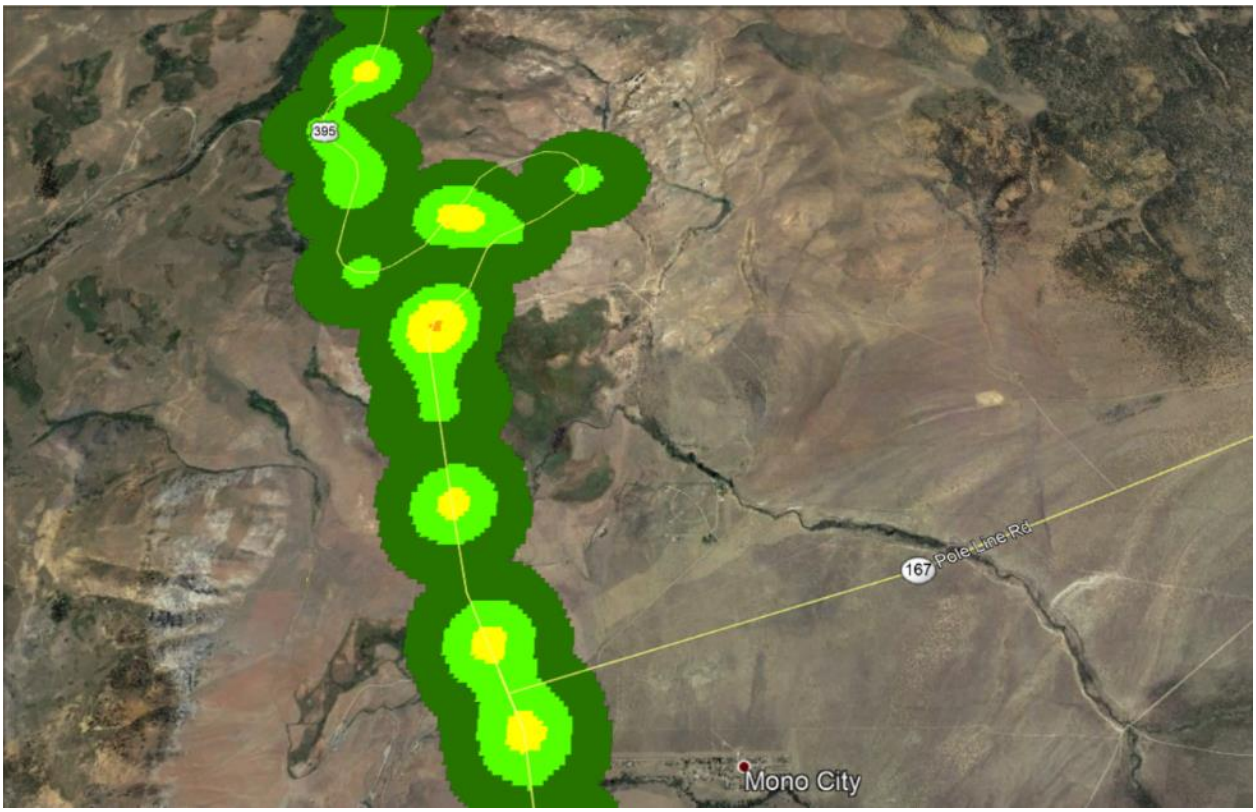

**9F**

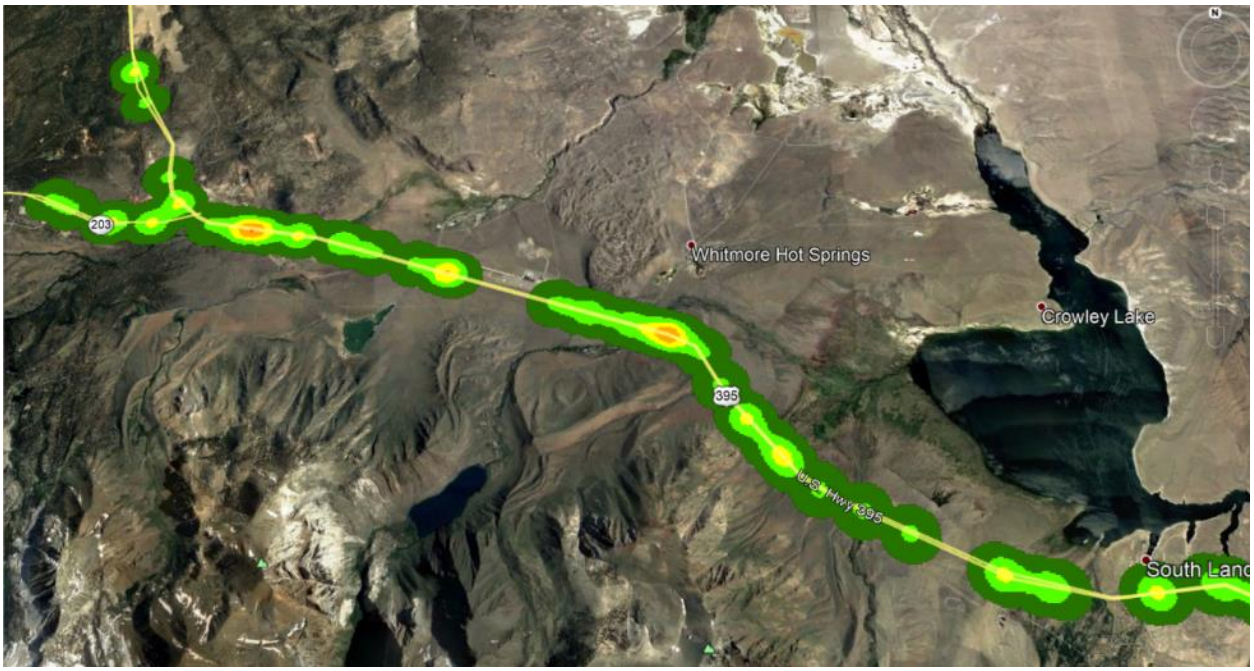

**CARCASS DATA DISTRICT 10**

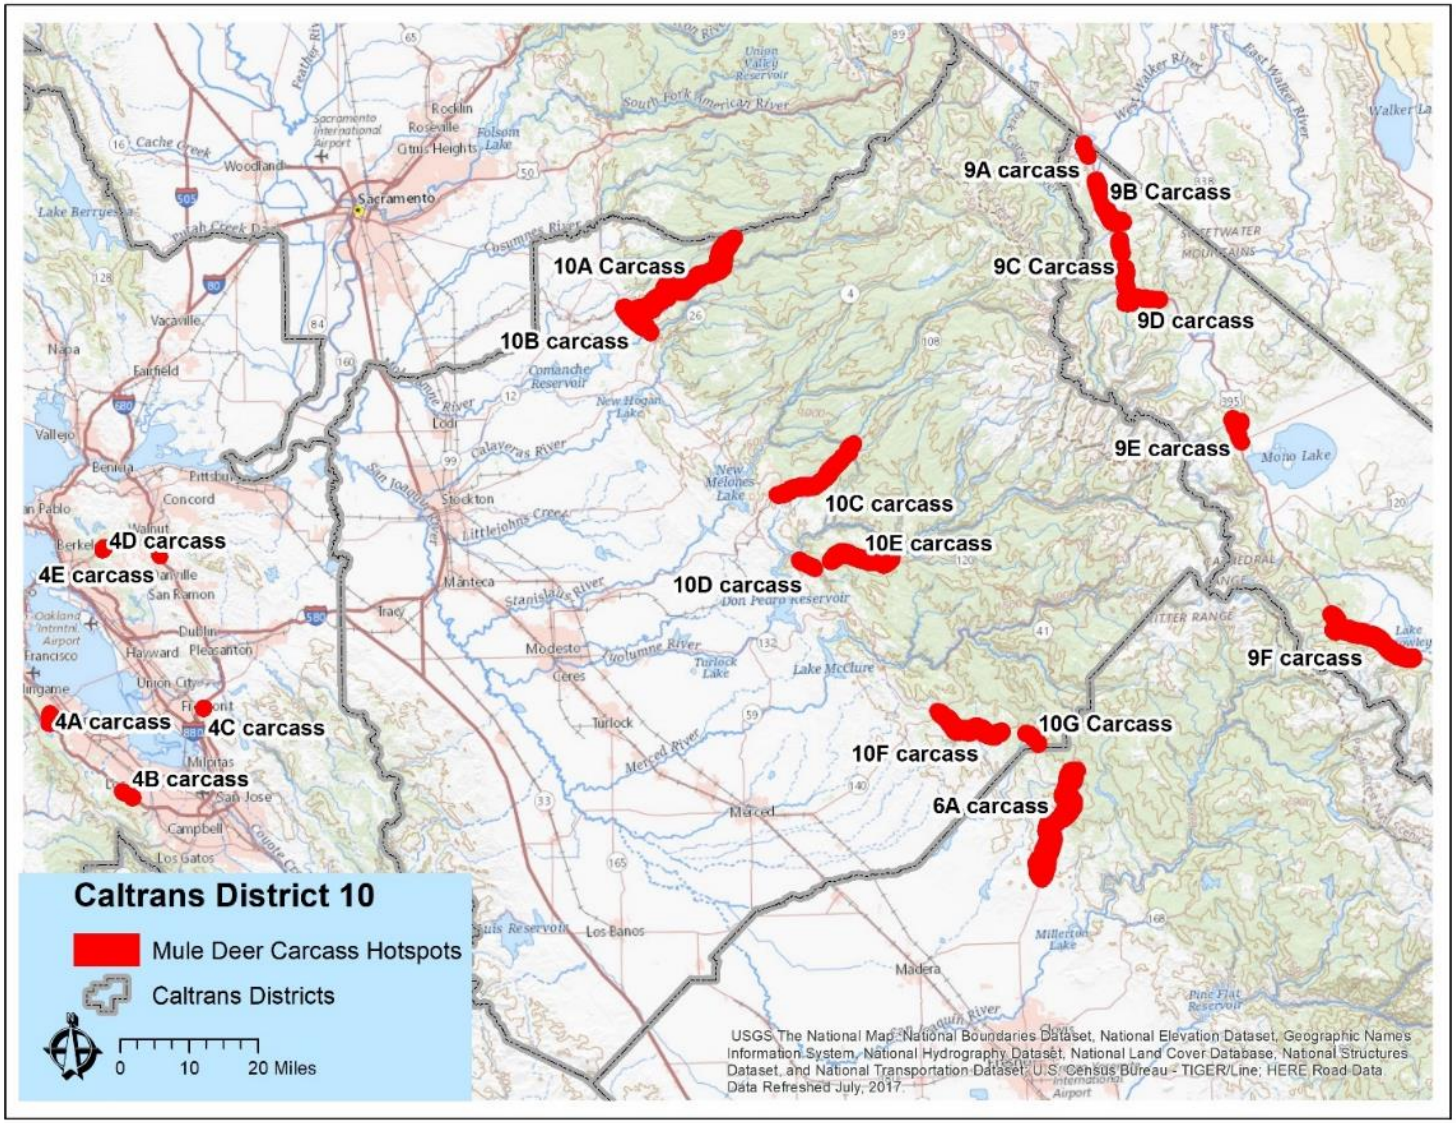



Hot spots in District 10 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.


**10A**


Fiddletown
Plymouth
16
124
Volcano
Pioneer
Pine Grove
26
Sutter Creek
Carson Pass Hwy
104
88
Amador
Jackson
49
Glencoe


**10B**

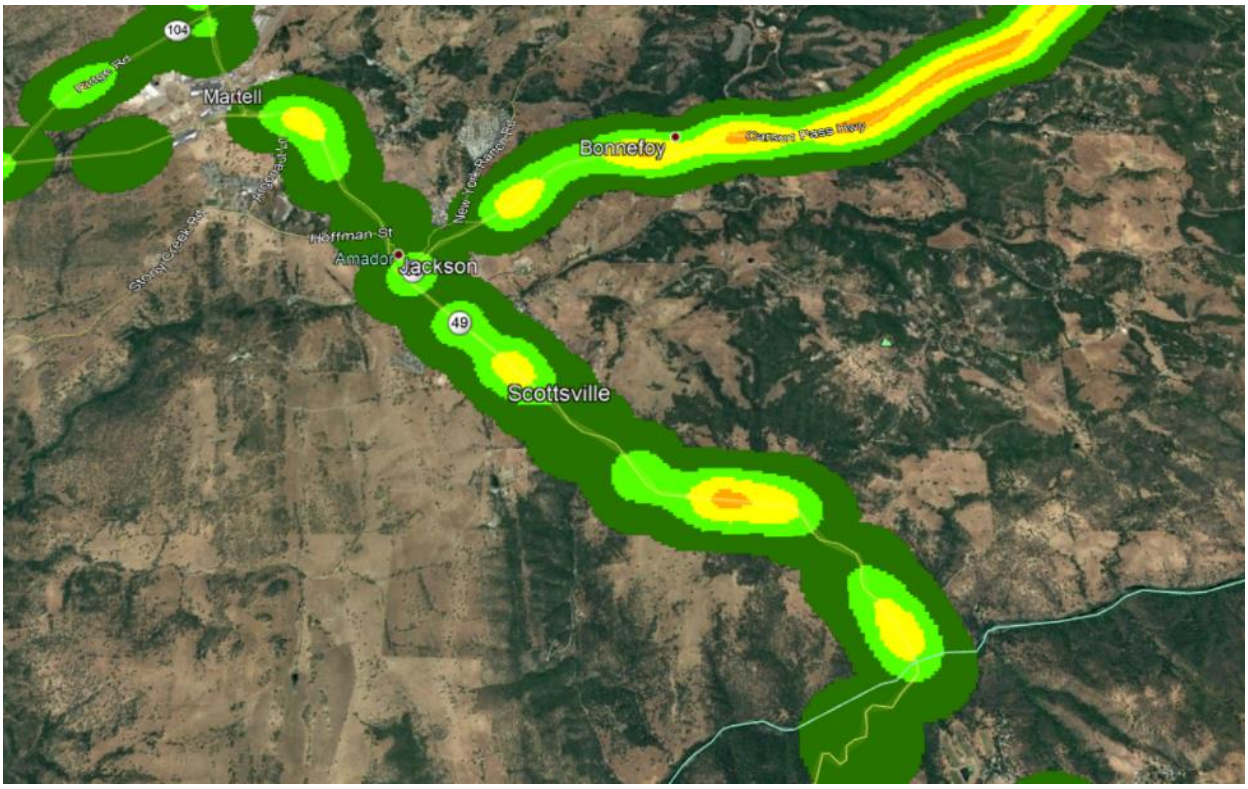
104
Martell
Bonnefoy
Hoffman St
Amador
Jackson
49
Scottsville


**10C**

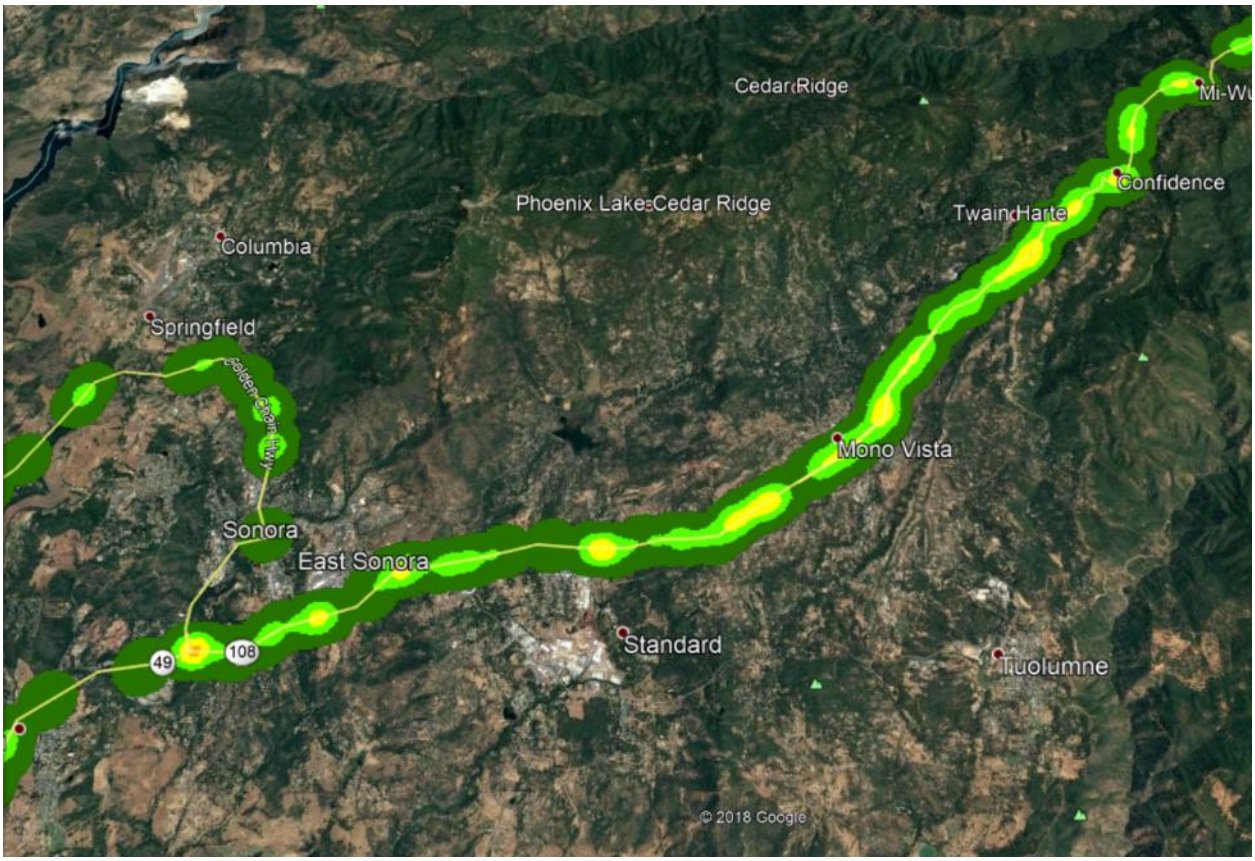
Cedar Ridge
Phoenix Lake-Cedar Ridge
Twain Harte
Confidence
Columbia
Springfield
Mono Vista
Sonora
East Sonora
Standard
Tuolumne
49
108
© 2018 Google

**10D**

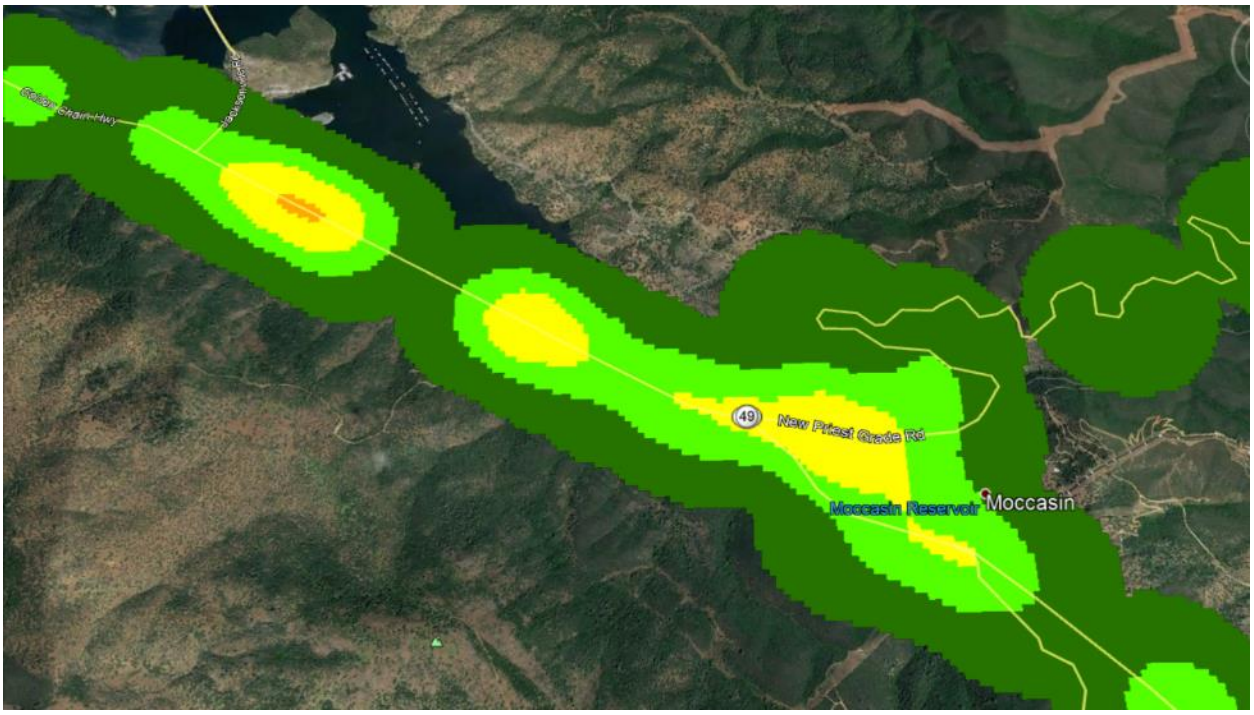


**10E**

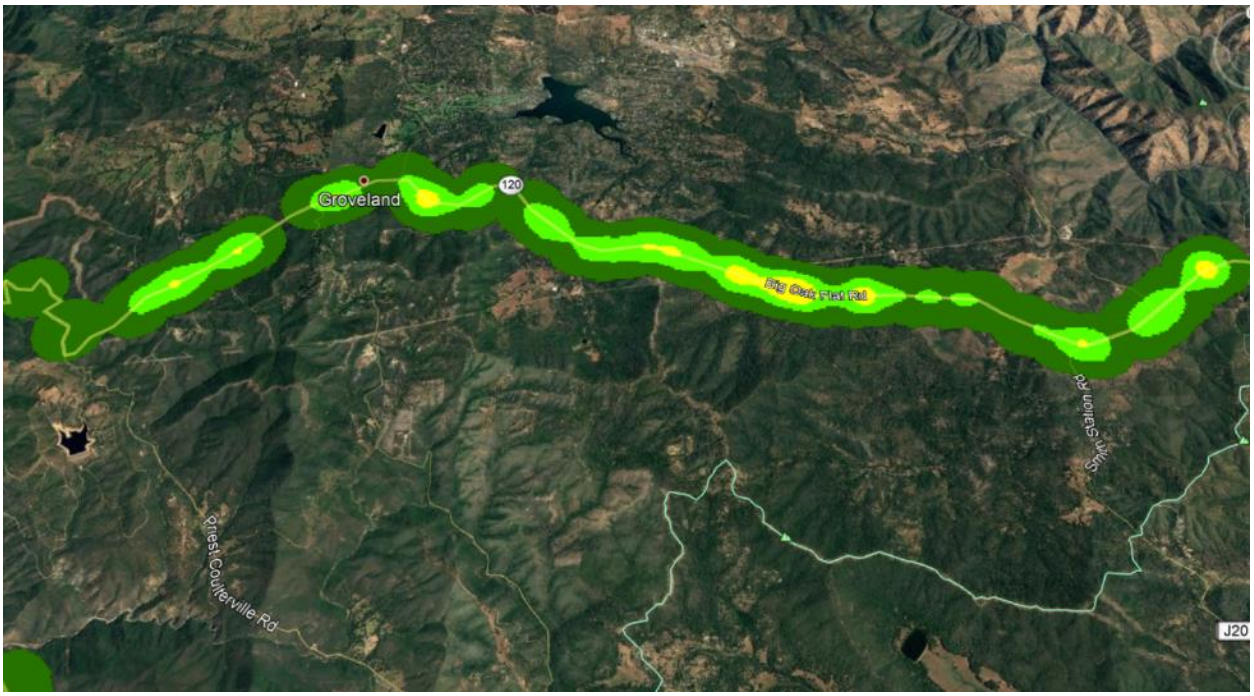
Groveland
120
Big Oak Flat Rd
Ernest Coulterville Rd
Savage Station Rd
J20

**10F**


Midpines
Darrah
140
49
Mariposa
Agua Fria
Mariposa
Mormon Bar
Bootjack
Bridgeport


**10G**

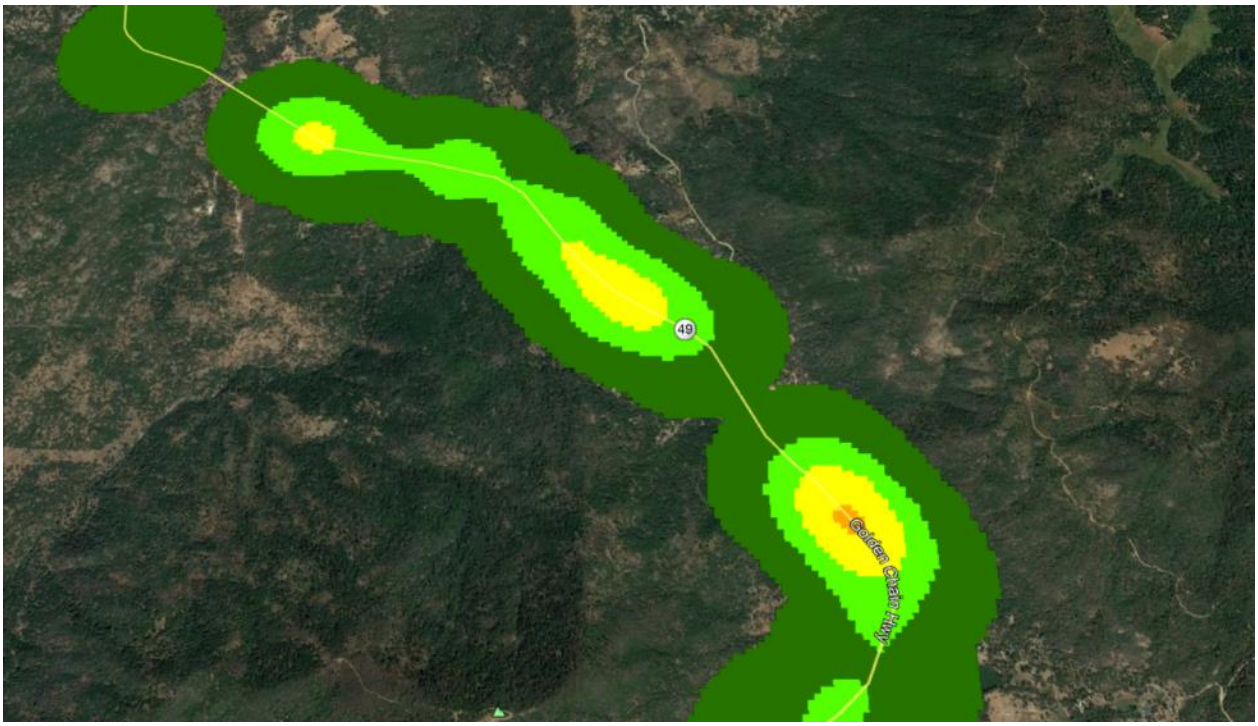

**CARCASS DATA DISTRICT 11**


Insufficient data

**CARCASS DATA DISTRICT 12**

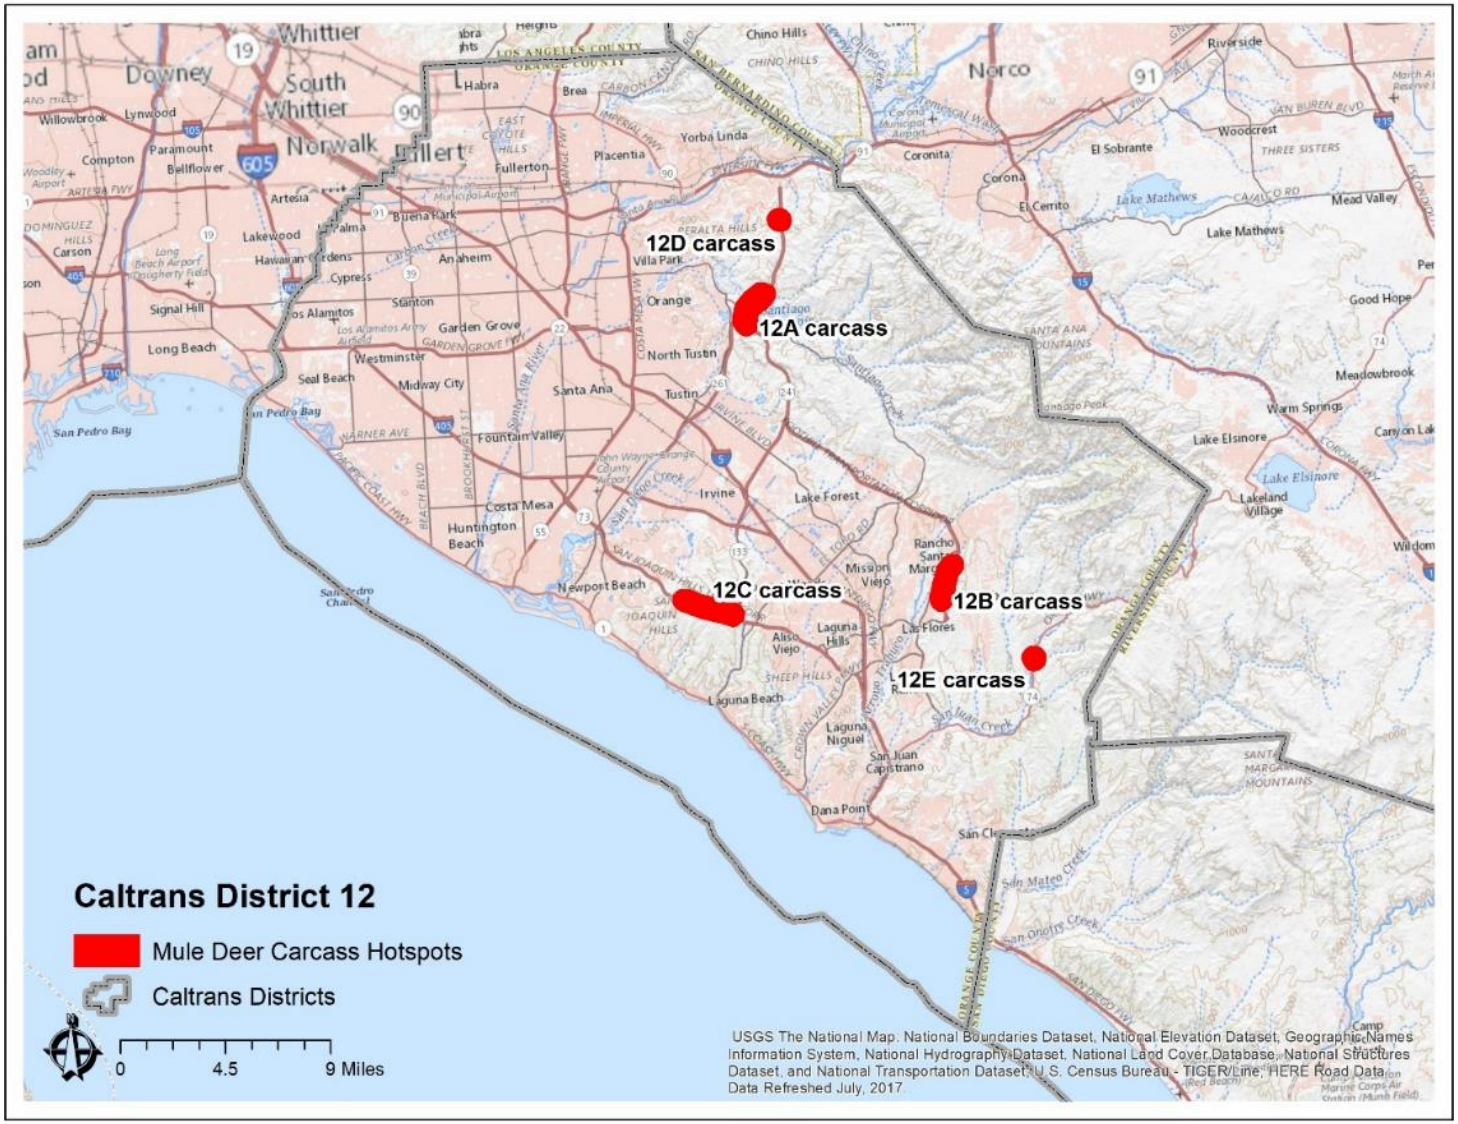



Hot spots in District 12 based on per district mule deer carcass data (see Figure 1, page 13 for the location of the districts in CA). The numbers correspond with the table (second page of Appendix C) and the detailed maps on the following pages.

**12A**

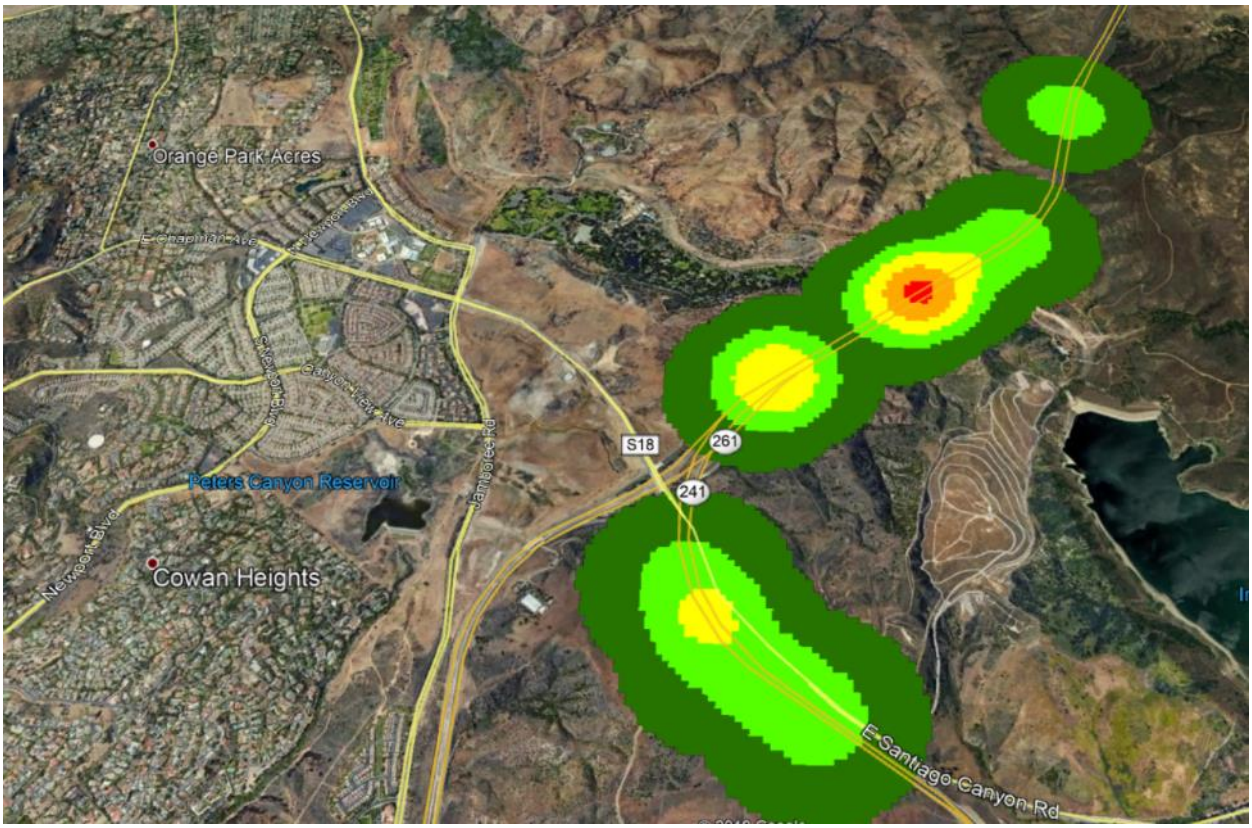
Orange Park Acres
Peters Canyon Reservoir
Cowan Heights
Jamboree Rd
S18
261
241
E Santiago Canyon Rd

**12B**

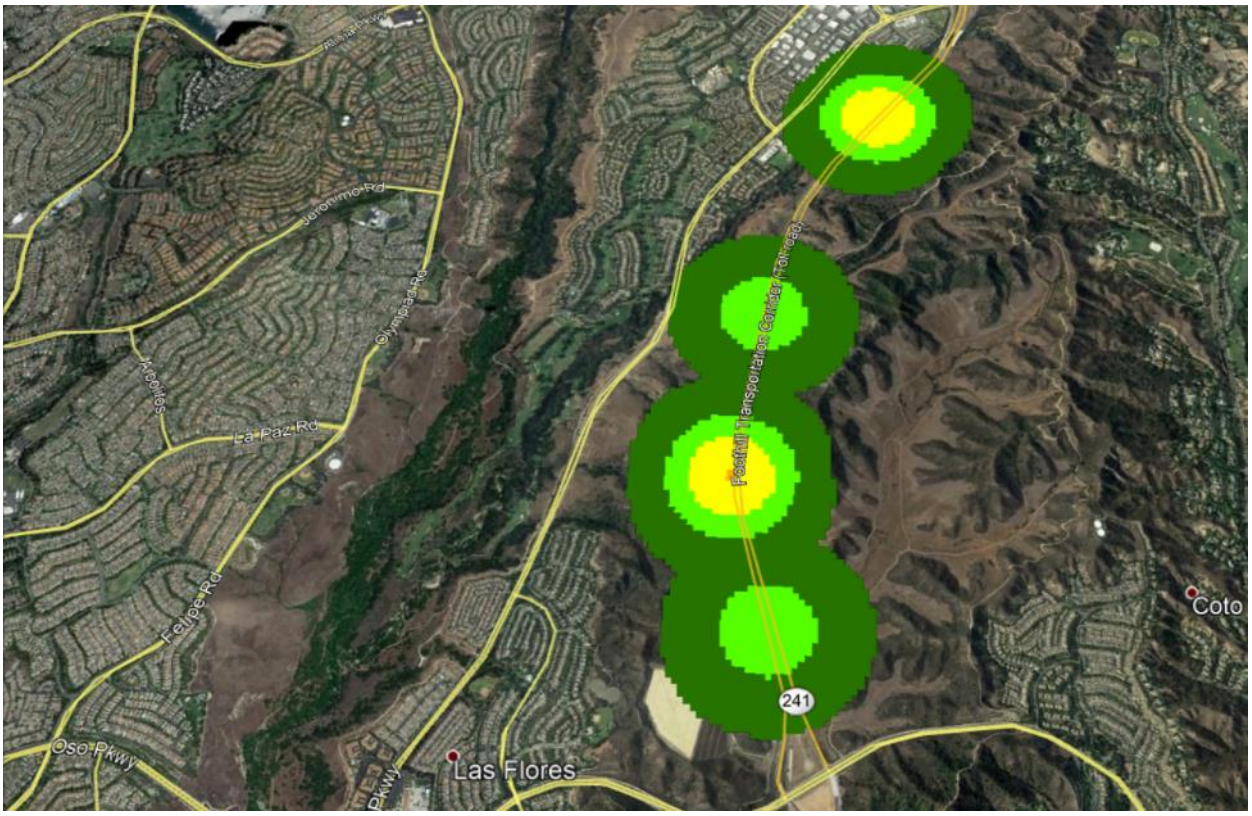
Alamar Pkwy
Jeronimo Rd
Olympiad Rd
Antonio
La Paz Rd
Felipe Rd
Oso Pkwy
Pkwy
Las Flores
Foothill Transportation Corridor (Toll Road)
241
Coto

**12C**


San Joaquin Hills
San Joaquin Hills Rd
Newport Coast
Laguna Canyon Rd
Alise Creek Rd
El Toro Rd
405
5
133
73
18

**12D**


Barrera Canyon Rd
E Eastern Transportation Corridor (Toll road)
Serrano Ave
241

**12E**

